

# FSL126MR

## Green-Mode Power Switch

### Description

The FSL126MR integrated Pulse Width Modulator (PWM) and SENSEFET<sup>®</sup> is specifically designed for high-performance offline Switch-Mode Power Supplies (SMPS) with minimal external components. FSL126MR includes integrated high-voltage power switching regulators that combine an avalanche-rugged SENSEFET with a current-mode PWM control block.

The integrated PWM controller includes: Under-Voltage Lockout (UVLO) protection, Leading-Edge Blanking (LEB), a frequency generator for EMI attenuation, an optimized gate turn-on / turn-off driver, Thermal Shutdown (TSD) protection, and temperature-compensated precision current sources for loop compensation and fault protection circuitry. The FSL126MR offers good soft-start performance. When compared to a discrete MOSFET and controller or RCC switching converter solution, the FSL126MR reduces total component count, design size, and weight; while increasing efficiency, productivity, and system reliability. This device provides a basic platform that is well suited for the design of cost-effective flyback converters.

### Features

- Internal Avalanche-Rugged SENSEFET (650 V)
- Under 50 mW Standby Power Consumption at 265 V<sub>AC</sub>, No-load Condition with Burst Mode
- Precision Fixed Operating Frequency with Frequency Modulation for Attenuating EMI
- Internal Startup Circuit
- Built-in Soft-Start: 15 ms
- Pulse-by-Pulse Current Limiting
- Various Protections: Over-Voltage Protection (OVP), Overload Protection (OLP), Output-Short Protection (OSP), Abnormal Over-Current-Protection (AOCP), Internal Thermal Shutdown Function with Hysteresis (TSD)
- Auto-Restart Mode
- Under-Voltage Lockout (UVLO)
- Low Operating Current: 1.8 mA
- Adjustable Peak Current Limit
- This is a Pb-Free Device


### Applications

- SMPS for VCR, STB, DVD, & DVCD Players
- SMPS for Home Appliance
- Adapter




**ON Semiconductor<sup>®</sup>**

[www.onsemi.com](http://www.onsemi.com)



**PDIP8 9.42x6.38, 2.54P  
CASE 646CM**

### MARKING DIAGRAM



\$Y = ON Semiconductor Logo  
&E = Designates Space  
&Z = Assembly Plant Code  
&2 = 2-Digit Date Code Format  
&K = 2-Digit Lot Run Traceability Code  
FSL126MR = Specific Device Code Data

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

# FSL126MR

## Related Resources

- [AN-4137 – Design Guidelines for Offline Flyback Converters Using Power Switch](#)
- [AN-4141 – Troubleshooting and Design Tips for Power Switch Flyback Applications](#)
- [AN-4147 – Design Guidelines for RCD Snubber of Flyback](#)
- [Evaluation Board: FEBFSL126MR\\_H432v1](#)
- [Power Supply WebDesigner – Flyback Design & Simulation – In Minutes at No Expense](#)

Table 1. MAXIMUM OUTPUT POWER

| Maximum Output Power (Note 1)    |            |                          |            |
|----------------------------------|------------|--------------------------|------------|
| 230V <sub>AC</sub> ±15% (Note 2) |            | 85 – 265 V <sub>AC</sub> |            |
| Adapter (Note 3)                 | Open Frame | Adapter (Note 3)         | Open Frame |
| 15 W                             | 21 W       | 12 W                     | 17 W       |

1. The junction temperature can limit the maximum output power.
2. 230 V<sub>AC</sub> or 100 / 115 V<sub>AC</sub> with doubler.
3. Typical continuous power in a non-ventilated enclosed adapter measured at 50°C ambient.

## ORDERING INFORMATION

| Part Number | Operating Temperature Range | Top Mark | Package                                     | Shipping          |
|-------------|-----------------------------|----------|---------------------------------------------|-------------------|
| FSL126MR    | –40 to 105°C                | FSL126MR | 8-Lead, Dual Inline Package (DIP) (Pb-Free) | 3000 Units / Tube |

## Application Diagram

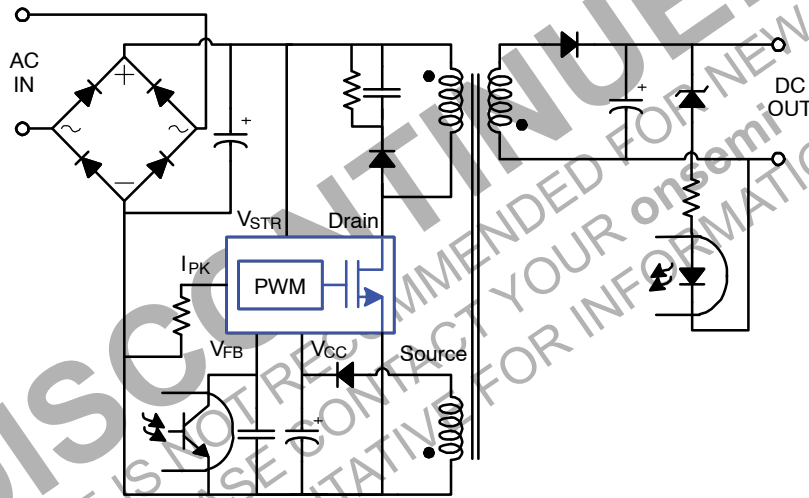


Figure 1. Typical Application

# FSL126MR

## Internal Block Diagram

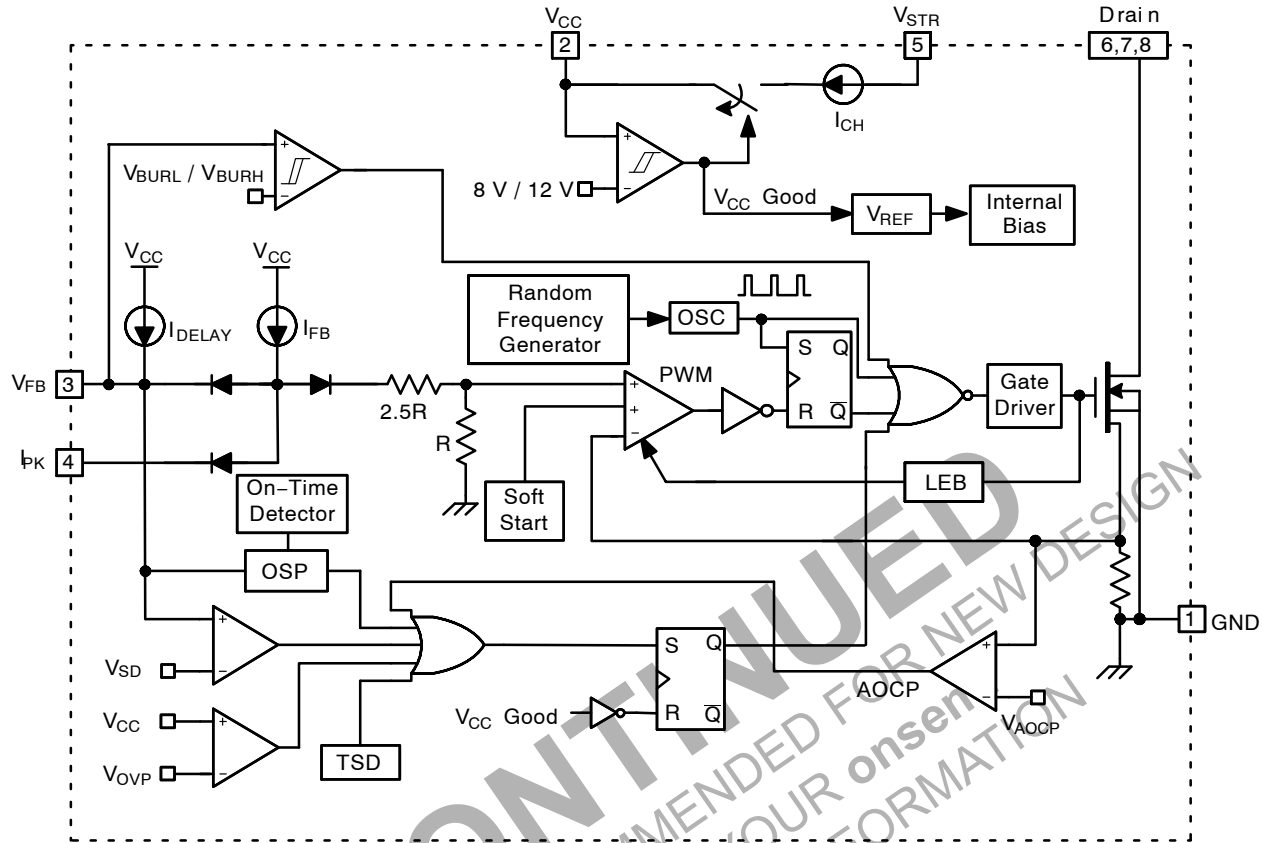


Figure 2. Internal Block Diagram

## Pin Configuration

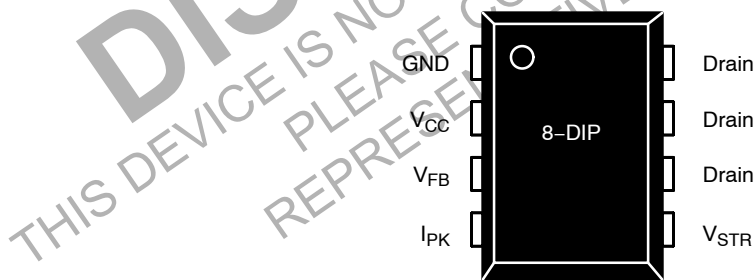


Figure 3. Pin Configuration

## PIN DEFINITIONS

| Pin No. | Name             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | GND              | Ground. SENSEFET source terminal on the primary side and internal control ground.                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2       | V <sub>CC</sub>  | Positive Supply Voltage Input. Although connected to an auxiliary transformer winding, current is supplied from pin 5 (V <sub>STR</sub> ) via an internal switch during startup (see Figure 2). Once V <sub>CC</sub> reaches the UVLO upper threshold (12 V), the internal startup switch opens and device power is supplied via the auxiliary transformer winding.                                                                                                                 |
| 3       | V <sub>FB</sub>  | Feedback Voltage. The non-inverting input to the PWM comparator, it has a 0.4 mA current source connected internally, while a capacitor and opto-coupler are typically connected externally. There is a delay while charging external capacitor C <sub>FB</sub> from 2.4 V to 6 V using an internal 5 $\mu$ A current source. This delay prevents false triggering under transient conditions, but still allows the protection mechanism to operate under true overload conditions. |
| 4       | I <sub>PK</sub>  | Peak Current Limit. Adjusts the peak current limit of the SENSEFET. The feedback 0.4 mA current source is diverted to the parallel combination of an internal 6 k $\Omega$ resistor and any external resistor to GND on this pin to determine the peak current limit.                                                                                                                                                                                                               |
| 5       | V <sub>STR</sub> | Startup. Connected to the rectified AC line voltage source. At startup, the internal switch supplies internal bias and charges an external storage capacitor placed between the V <sub>CC</sub> pin and ground. Once V <sub>CC</sub> reaches 12 V, the internal switch is opened.                                                                                                                                                                                                   |
| 6, 7, 8 | Drain            | Drain. Designed to connect directly to the primary lead of the transformer and capable of switching a maximum of 650 V. Minimizing the length of the trace connecting these pins to the transformer decreases leakage inductance.                                                                                                                                                                                                                                                   |

## ABSOLUTE MAXIMUM RATINGS

| Symbol           | Parameter                                          | Min                | Max   | Unit |
|------------------|----------------------------------------------------|--------------------|-------|------|
| V <sub>STR</sub> | V <sub>STR</sub> Pin Voltage                       | -0.3               | 650.0 | V    |
| V <sub>DS</sub>  | Drain Pin Voltage                                  | -0.3               | 650.0 | V    |
| V <sub>CC</sub>  | Supply Voltage                                     | -                  | 26    | V    |
| V <sub>FB</sub>  | Feedback Voltage Range                             | -0.3               | 12.0  | V    |
| I <sub>D</sub>   | Continuous Drain Current                           | -                  | 2     | A    |
| I <sub>DM</sub>  | Drain Current Pulsed (Note 4)                      | -                  | 8     | A    |
| E <sub>AS</sub>  | Single Pulsed Avalanche Energy (Note 5)            | -                  | 73    | mJ   |
| P <sub>D</sub>   | Total Power Dissipation                            | -                  | 1.5   | W    |
| T <sub>J</sub>   | Operating Junction Temperature                     | Internally Limited |       | °C   |
| T <sub>A</sub>   | Operating Ambient Temperature                      | -40                | +105  | °C   |
| T <sub>STG</sub> | Storage Temperature                                | -55                | +150  | °C   |
| ESD              | Human Body Model, JESD22-A114 (Note 6)             | 5                  | -     | KV   |
|                  | Charged Device Model, JESD22-C101 (Note 6)         | 2                  | -     |      |
| $\Theta_{JA}$    | Junction-to-Ambient Thermal Resistance (Note 7, 8) | -                  | 80    | °C/W |
| $\Theta_{JC}$    | Junction-to-Case Thermal Resistance (Note 7, 9)    | -                  | 19    | °C/W |
| $\Theta_{JT}$    | Junction-to-Top Thermal Resistance (Note 7, 10)    | -                  | 33.7  | °C/W |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

4. Repetitive rating: pulse width limited by maximum junction temperature.

5. L = 30 mH, starting T<sub>J</sub> = 25°C.

6. Meets JEDEC standards JESD 22-A114 and JESD 22-C101.

7. All items are tested with the standards JESD 51-2 and JESD 51-10.

8.  $\Theta_{JA}$  free-standing, with no heat-sink, under natural convection.

9.  $\Theta_{JC}$  junction-to-lead thermal characteristics under Q<sub>JA</sub> test condition. T<sub>C</sub> is measured on the source #7 pin closed to plastic interface for  $\Theta_{JA}$  thermo-couple mounted on soldering.

10.  $\Theta_{JT}$  junction-to-top of thermal characteristic under Q<sub>JA</sub> test condition. T<sub>t</sub> is measured on top of package. Thermo-couple is mounted in epoxy glue.

# FSL126MR

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|--------|-----------|----------------|-----|-----|-----|------|
|--------|-----------|----------------|-----|-----|-----|------|

### SENSEFET SECTION

|                     |                                  |                                                                      |     |      |     |    |
|---------------------|----------------------------------|----------------------------------------------------------------------|-----|------|-----|----|
| BV <sub>DSS</sub>   | Drain-Source Breakdown Voltage   | V <sub>CC</sub> = 0 V, I <sub>D</sub> = 250 μA                       | 650 | –    | –   | V  |
| I <sub>DSS</sub>    | Zero Gate Voltage Drain Current  | V <sub>DS</sub> = 650 V, V <sub>GS</sub> = 0 V                       | –   | –    | 250 | μA |
| R <sub>DS(ON)</sub> | Drain-Source On-State Resistance | V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 0 V, T <sub>C</sub> = 25°C | –   | 4.9  | 6.2 | Ω  |
| C <sub>ISS</sub>    | Input Capacitance                | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz             | –   | 210  | –   | pF |
| C <sub>OSS</sub>    | Output Capacitance               | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz             | –   | 33.3 | –   | pF |
| C <sub>RSS</sub>    | Reverse Transfer Capacitance     | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz             | –   | 4.1  | –   | pF |
| t <sub>d(ON)</sub>  | Turn-On Delay                    | V <sub>DS</sub> = 350 V, I <sub>DS</sub> = 2 A                       | –   | 23   | –   | ns |
| t <sub>r</sub>      | Rise Time                        | V <sub>DS</sub> = 350 V, I <sub>DS</sub> = 2 A                       | –   | 16.4 | –   | ns |
| t <sub>d(OFF)</sub> | Turn-Off Delay                   | V <sub>DS</sub> = 350 V, I <sub>DS</sub> = 2 A                       | –   | 17.2 | –   | ns |
| t <sub>f</sub>      | Fall Time                        | V <sub>DS</sub> = 350 V, I <sub>DS</sub> = 2 A                       | –   | 23   | –   | ns |

### CONTROL SECTION

|                    |                               |                                                                       |     |     |     |     |
|--------------------|-------------------------------|-----------------------------------------------------------------------|-----|-----|-----|-----|
| f <sub>OSC</sub>   | Switching Frequency           | V <sub>DS</sub> = 650 V, V <sub>GS</sub> = 0 V                        | 61  | 67  | 73  | KHz |
| Δf <sub>OSC</sub>  | Switching Frequency Variation | V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 0 V, T <sub>C</sub> = 125°C | –   | ±5  | ±10 | %   |
| f <sub>FM</sub>    | Frequency Modulation          |                                                                       | –   | ±3  | –   | KHz |
| D <sub>MAX</sub>   | Maximum Duty Cycle            | V <sub>FB</sub> = 4 V                                                 | 71  | 77  | 83  | %   |
| D <sub>MIN</sub>   | Minimum Duty Cycle            | V <sub>FB</sub> = 0 V                                                 | 0   | 0   | 0   | %   |
| V <sub>START</sub> | UVLO Threshold Voltage        |                                                                       | 11  | 12  | 13  | V   |
| V <sub>STOP</sub>  |                               | After Turn-On                                                         | 7   | 8   | 9   | V   |
| I <sub>FB</sub>    | Feedback Source Current       | V <sub>FB</sub> = 0 V                                                 | 320 | 400 | 480 | μA  |
| t <sub>S/S</sub>   | Internal Soft-Start Time      | V <sub>FB</sub> = 4 V                                                 | 10  | 15  | 20  | ms  |

### BURST-MODE SECTION

|                       |                    |                                               |      |      |      |    |
|-----------------------|--------------------|-----------------------------------------------|------|------|------|----|
| V <sub>BURH</sub>     | Burst-Mode Voltage | V <sub>CC</sub> = 14 V, V <sub>FB</sub> Sweep | 0.48 | 0.60 | 0.72 | V  |
| V <sub>BURL</sub>     |                    |                                               | 0.32 | 0.45 | 0.58 | V  |
| V <sub>BUR(HYS)</sub> |                    |                                               | –    | 150  | –    | mV |

### PROTECTION SECTION

|                     |                                    |                                          |      |      |      |    |
|---------------------|------------------------------------|------------------------------------------|------|------|------|----|
| I <sub>LIM</sub>    | Peak Current Limit                 | T <sub>J</sub> = 25°C, di/dt = 300 mA/μs | 1.32 | 1.50 | 1.68 | A  |
| t <sub>CLD</sub>    | Current Limit Delay Time (Note 11) |                                          | 200  | –    | –    | ns |
| V <sub>SD</sub>     | Shutdown Feedback Voltage          | V <sub>CC</sub> = 15 V                   | 5.5  | 6.0  | 6.5  | V  |
| I <sub>DELAY</sub>  | Shutdown Delay Current             | V <sub>FB</sub> = 5 V                    | 3.5  | 5.0  | 6.5  | μA |
| V <sub>OV</sub>     | Over-Voltage Protection Threshold  | V <sub>FB</sub> = 2 V                    | 22.5 | 24.0 | 25.5 | V  |
| t <sub>OSP</sub>    | Output Short Protection (Note 11)  | Threshold Time                           | –    | 1.00 | 1.35 | μs |
| V <sub>OSP</sub>    |                                    | Threshold Feedback Voltage               | 1.44 | 1.60 | –    | V  |
| t <sub>OSP_FB</sub> |                                    | Feedback Blanking Time                   | 2.0  | 2.5  | –    | μs |
| V <sub>AACP</sub>   | AACP Voltage (Note 11)             | T <sub>J</sub> = 25°C                    | 0.85 | 1.00 | 1.15 | V  |
| TSD                 | Thermal Shutdown (Note 11)         | Shutdown Temperature                     | 125  | 137  | 150  | °C |
| HYS <sub>TSD</sub>  |                                    | Hysteresis                               | –    | 60   | –    | °C |

# FSL126MR

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (continued)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|--------|-----------|----------------|-----|-----|-----|------|
|--------|-----------|----------------|-----|-----|-----|------|

### PROTECTION SECTION

|           |                                      |  |     |   |   |    |
|-----------|--------------------------------------|--|-----|---|---|----|
| $t_{LEB}$ | Leading-Edge Blanking Time (Note 11) |  | 300 | – | – | ns |
|-----------|--------------------------------------|--|-----|---|---|----|

### TOTAL DEVICE SECTION

|           |                                                         |                                                     |     |     |     |    |
|-----------|---------------------------------------------------------|-----------------------------------------------------|-----|-----|-----|----|
| $I_{OP1}$ | Operating Supply Current (Note 11)<br>(While Switching) | $V_{CC} = 14\text{ V}$ , $V_{FB} > V_{BURH}$        | –   | 2.5 | 3.5 | mA |
| $I_{OP2}$ | Operating Supply Current, (Control Part Only)           | $V_{CC} = 14\text{ V}$ , $V_{FB} < V_{BURL}$        | –   | 1.8 | 2.5 | mA |
| $I_{CH}$  | Startup Charging Current                                | $V_{CC} = 0\text{ V}$                               | 0.9 | 1.1 | 1.5 | mA |
| $V_{STR}$ | Minimum $V_{STR}$ Supply Voltage                        | $V_{CC} = V_{FB} = 0\text{ V}$ , $V_{STR}$ Increase | 35  | –   | –   | V  |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

11. Though guaranteed by design, it is not 100% tested in production.

## TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

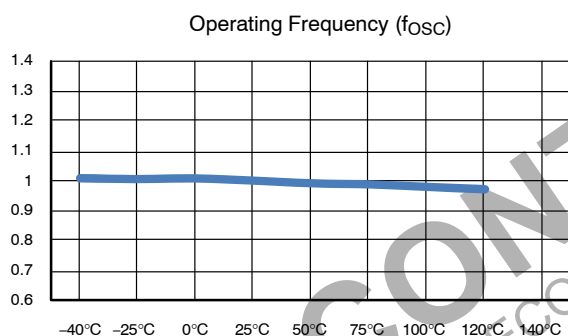


Figure 4. Operating Frequency vs. Temperature

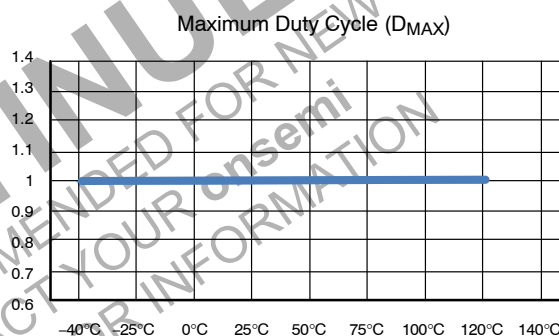


Figure 5. Maximum Duty Cycle vs. Temperature

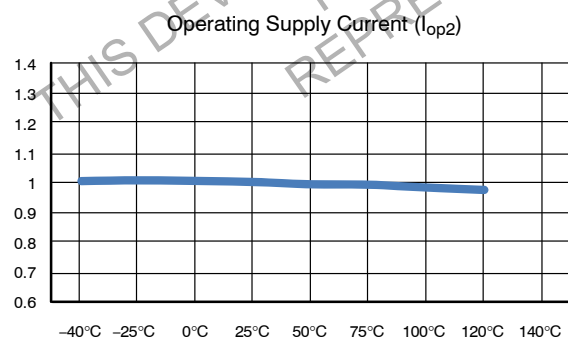


Figure 6. Operating Supply Current vs. Temperature



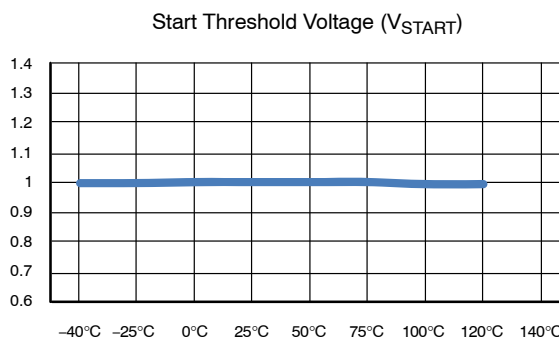


Figure 7. Start Threshold Voltage vs. Temperature


**TYPICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (continued)

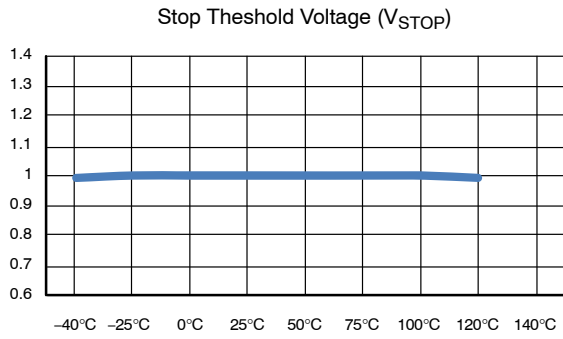


**Figure 8. Stop Theshold Voltage vs. Temperature**

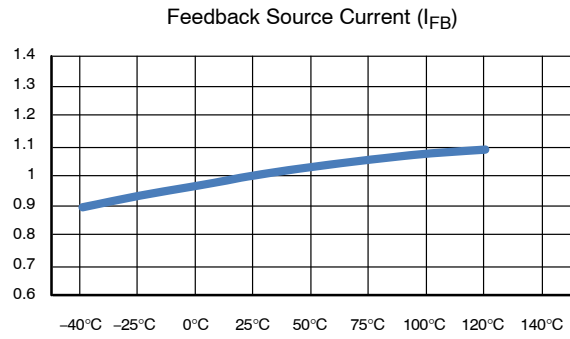


**Figure 9. Feedback Source Current vs. Temperature**

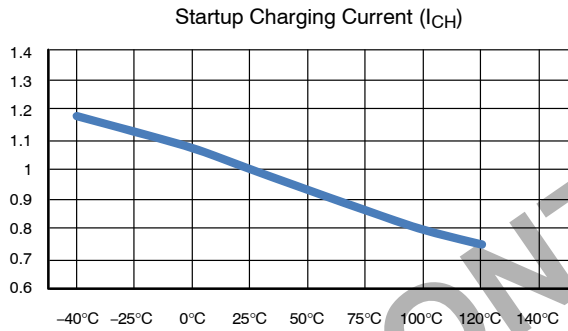


**Figure 10. Startup Charging Current vs. Temperature**

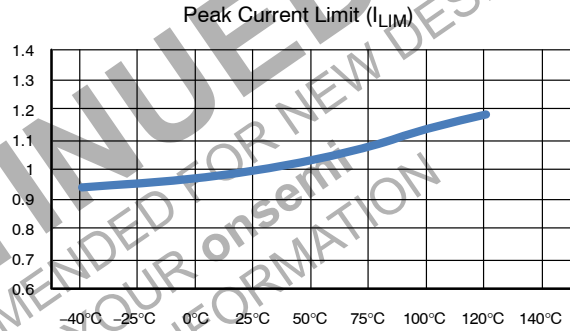

**Figure 11. Peak Current Limit vs. Temperature**

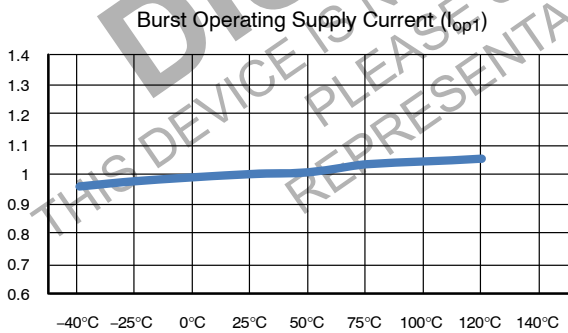


**Figure 12. Burst Operating Supply Current vs. Temperature**

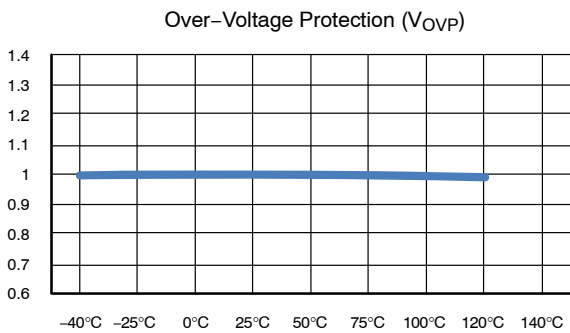

**Figure 13. Over-Voltage Protection vs. Temperature**



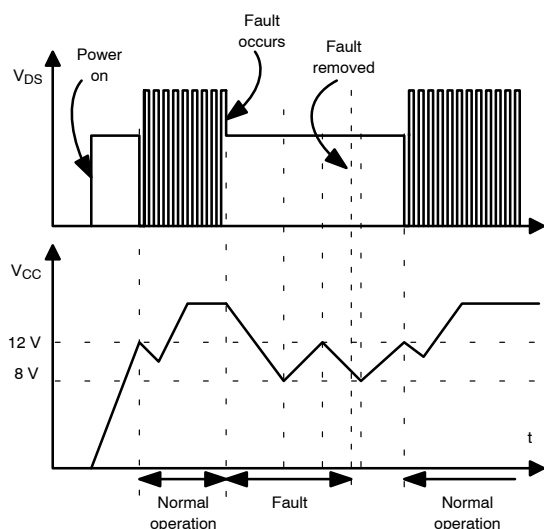


**Figure 17. Auto-Restart Protection Waveforms**

#### Overload Protection (OLP)

Overload is defined as the load current exceeding a pre-set level due to an unexpected event. In this situation, the protection circuit should be activated to protect the SMPS. However, even when the SMPS is operating normally, the overload protection (OLP) circuit can be activated during the load transition or startup. To avoid this undesired operation, the OLP circuit is designed to be activated after a specified time to determine whether it is a transient situation or a true overload situation.


In conjunction with the  $I_{PK}$  current limit pin (if used), the current-mode feedback path limits the current in the SENSEFET when the maximum PWM duty cycle is attained. If the output consumes more than this maximum power, the output voltage ( $V_O$ ) decreases below its rating voltage. This reduces the current through the opto-coupler LED, which also reduces the opto-coupler transistor current, thus increasing the feedback voltage ( $V_{FB}$ ). If  $V_{FB}$  exceeds 2.4 V, the feedback input diode is blocked and the 5  $\mu$ A current source ( $I_{DELAY}$ ) starts to charge  $C_{FB}$  slowly up to  $V_{CC}$ . In this condition,  $V_{FB}$  increases until it reaches 6 V, when the switching operation is terminated, as shown in Figure 18. The shutdown delay is the time required to charge  $C_{FB}$  from 2.4 V to 6 V with 5  $\mu$ A current source.

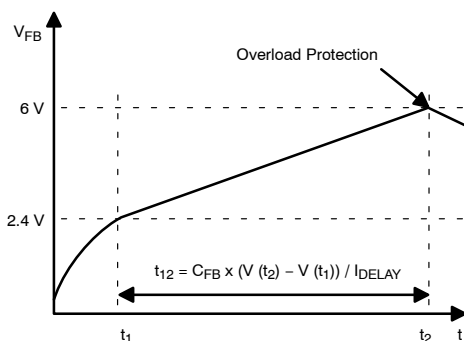

**Figure 18. Overload Protection (OLP)**

#### Abnormal Over-Current Protection (AOCP)

When the secondary rectifier diodes or the transformer pin are shorted, a steep current with extremely high di/dt can flow through the SENSEFET during the LEB time. Even though the power switch has OLP (Overload Protection), it is not enough to protect the power switch in that abnormal case, since severe current stress is imposed on the SENSEFET until OLP triggers. The power switch includes the internal AOCP (Abnormal Over-Current Protection) circuit shown in Figure 19. When the gate turn-on signal is applied to the power SENSEFET, the AOCP block is enabled and monitors the current through the sensing resistor. The voltage across the resistor is compared with a preset AOCP level. If the sensing resistor voltage is greater than the AOCP level, the set signal is applied to the latch, resulting in the shutdown of the SMPS.

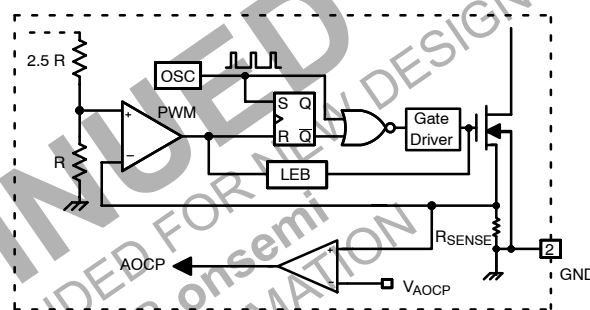

**Figure 19. Abnormal Over-Current Protection**

#### Thermal Shutdown (TSD)

The SENSEFET and the control IC are integrated, making it easier to detect the temperature of the SENSEFET. When the temperature exceeds approximately 137°C, thermal shutdown is activated.

#### Over-Voltage Protection (OVP)

In the event of a malfunction in the secondary-side feedback circuit or an open feedback loop caused by a soldering defect, the current through the opto-coupler transistor becomes almost zero. Then,  $V_{FB}$  climbs up in a similar manner to the overload situation, forcing the preset maximum current to be supplied to the SMPS until the overload protection is activated. Because excess energy is provided to the output, the output voltage may exceed the rated voltage before the overload protection is activated, resulting in the breakdown of the devices in the secondary side. To prevent this situation, an over-voltage protection (OVP) circuit is employed. In general,  $V_{CC}$  is proportional to the output voltage and the power switch uses  $V_{CC}$  instead of directly monitoring the output voltage. If  $V_{CC}$  exceeds 24 V, OVP circuit is activated, resulting in termination of the switching operation. To avoid undesired activation of OVP during normal operation,  $V_{CC}$  should be designed to be below 24 V.

### Output-Short Protection (OSP)

If the output is shorted, steep current with extremely high  $di/dt$  can flow through the SENSEFET during the LEB time. Such a steep current brings high-voltage stress on the drain of SENSEFET when turned off. To protect the device from such an abnormal condition, OSP detects  $V_{FB}$  and SENSEFET turn-on time. When the  $V_{FB}$  is higher than 1.6 V and the SENSEFET turn-on time is lower than 1.0  $\mu s$ , the FPS recognizes this condition as an abnormal error and shuts down PWM switching until  $V_{CC}$  reaches  $V_{START}$  again. An abnormal condition output is shown in Figure 20.

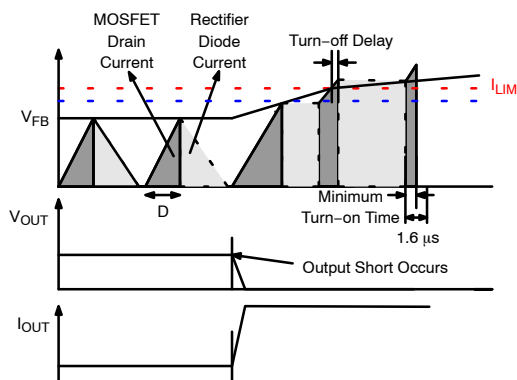


Figure 20. Output Short Waveforms (OSP)

### SOFT-START

The FPS has an internal soft-start circuit that slowly increases the feedback voltage, together with the SENSEFET current, after it starts. The typical soft-start time is 15 ms, as shown in Figure 21, where progressive increments of the SENSEFET current are allowed during the startup phase. The pulse width to the power switching device is progressively increased to establish the correct working conditions for transformers, inductors, and capacitors. The voltage on the output capacitors is progressively increased with the intention of smoothly establishing the required output voltage. Soft-start helps to prevent transformer saturation and reduce the stress on the secondary diode.

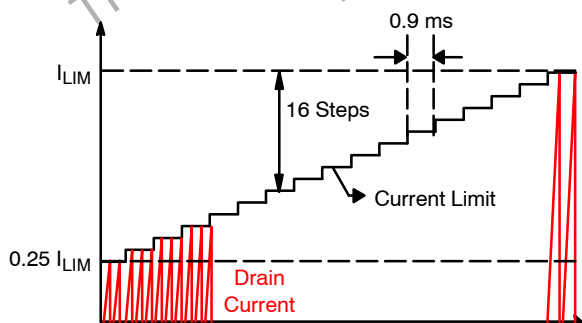


Figure 21. Internal Soft-Start

### Burst Mode Operation

To minimize power dissipation in standby mode, the FPS enters burst mode. As the load decreases, the feedback voltage decreases. As shown in Figure 22, the device automatically enters Burst Mode when the feedback voltage drops below  $V_{BURH}$ . Switching continues, but the current limit is fixed internally to minimize flux density in the transformer. The fixed current limit is larger than that defined by  $V_{FB} = V_{BURH}$  and, therefore,  $V_{FB}$  is driven down further. Switching continues until the feedback voltage drops below  $V_{BURL}$ . At this point, switching stops and the output voltages start to drop at a rate dependent on the standby current load. This causes the feedback voltage to rise. Once it passes  $V_{BURH}$ , switching resumes. The feedback voltage then falls and the process repeats. Burst mode alternately enables and disables switching of the SENSEFET and reduces switching loss in standby mode.

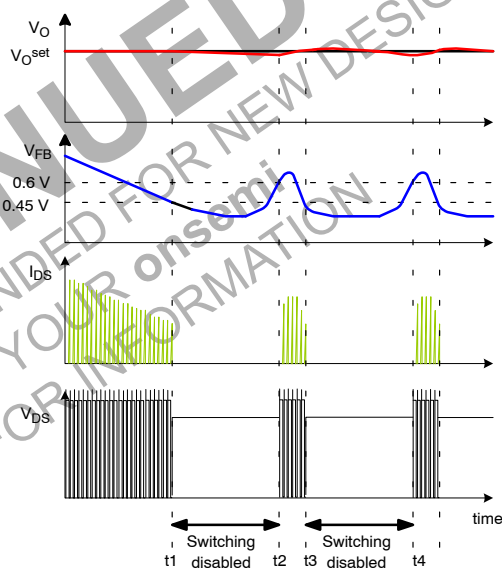


Figure 22. Burst-Mode Operation

### Adjusting Peak Current Limit

As shown in Figure 23, a combined 6 k $\Omega$  internal resistance is connected to the non-inverting lead on the PWM comparator. An external resistance of  $R_x$  on the current limit pin forms a parallel resistance with the 6 k $\Omega$  when the internal diodes are biased by the main current source of 400  $\mu A$ . For example, FSL126MR has a typical SENSEFET peak current limit ( $I_{LIM}$ ) of 1.5 A.  $I_{LIM}$  can be adjusted to 0.8 A by inserting  $R_x$  between the  $I_{PK}$  pin and the ground. The value of the  $R_x$  can be estimated by the following equations:

$$1.5 \text{ A} : 1 \text{ A} = 6 \text{ k}\Omega : X \text{ k}\Omega \quad (\text{eq. 1})$$

$$X = R_x \parallel 6 \text{ k}\Omega \quad (\text{eq. 2})$$

where  $X$  is the resistance of the parallel network.


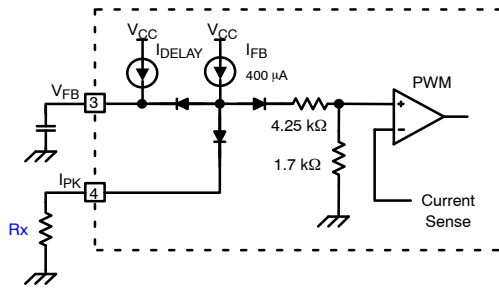


Figure 23. Peak Current Limit Adjustment

**DISCONTINUED**  
 THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN  
 PLEASE CONTACT YOUR onsemi  
 REPRESENTATIVE FOR INFORMATION

PDIP8 9.42x6.38, 2.54P  
CASE 646CM  
ISSUE O

DATE 31 JUL 2016

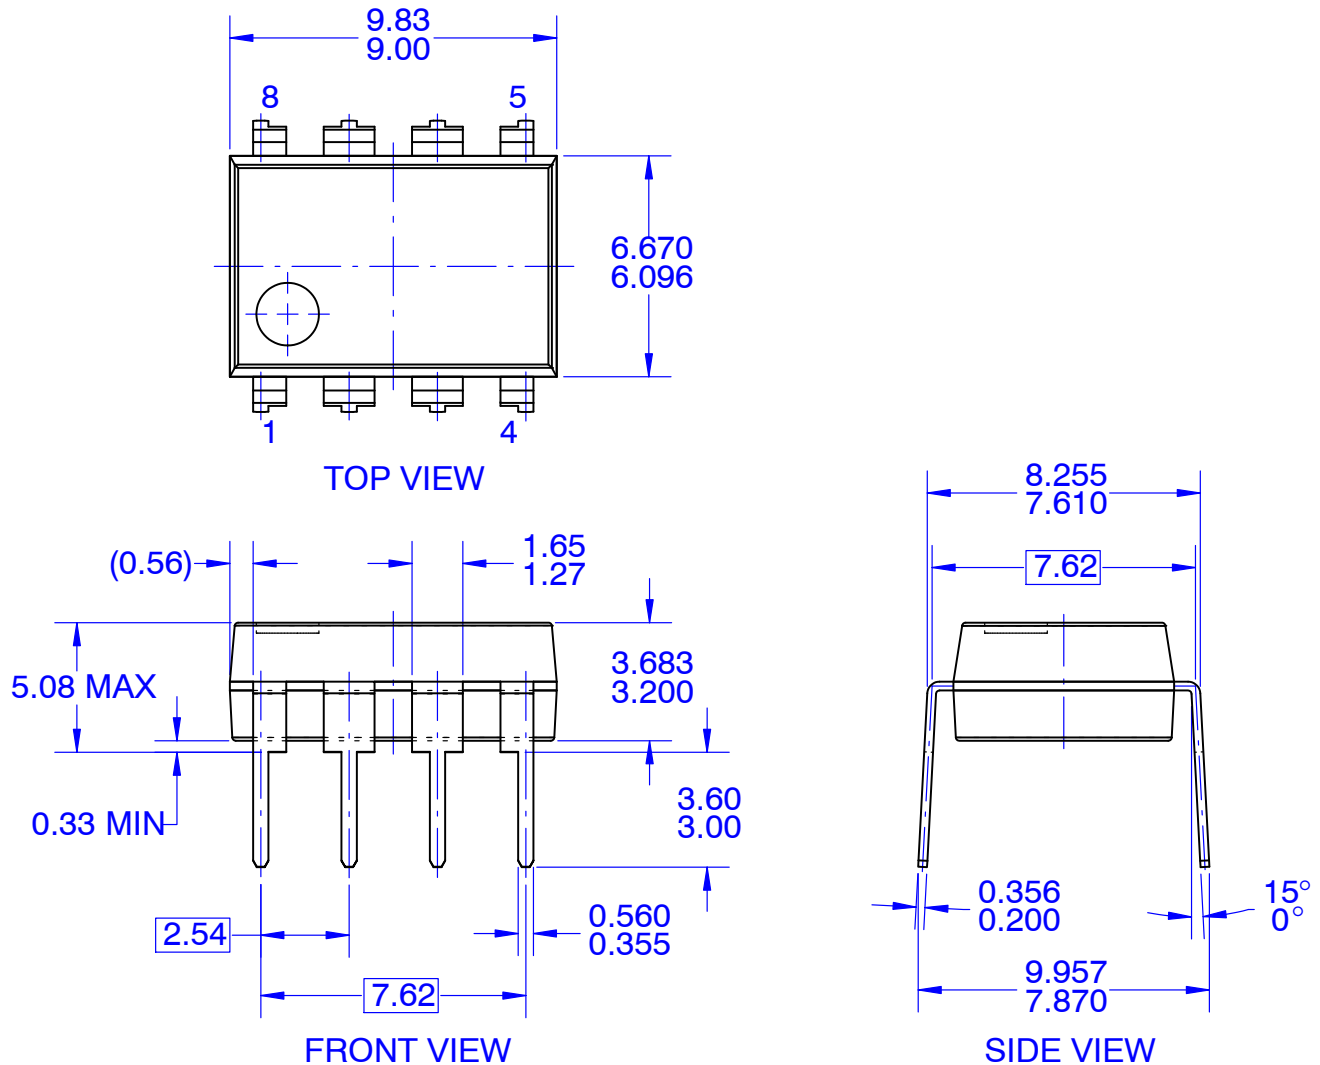

**NOTES:**

- A. CONFORMS TO JEDEC MS-001, VARIATION BA
- B. ALL DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
- D. DIMENSIONS AND TOLERANCES PER ASME Y14.5M-2009

|                         |                               |                                                                                                                                                                                     |
|-------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13468G</b>            | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>PDIP8 9.42X6.38, 2.54P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)