



EMC Filters for Shielded Rooms

Series/Type: B84312C*J303

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B84312C0020J303		2023-04-14	2023-07-28	2023-10-27

Please contact your nearest TDK sales office if you need support in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.tdk-electronics.tdk.com/sales.

Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA

B84312CxxxxJ303

- HEMP protection acc. MIL-STD-188-125-1
- Passband up to 300 kHz
- Stopband attenuation up to 40 GHz



Features

- Extended performance
- For installation outside the shielded area
- Multi step EMP protection

Design

The electrical components are incorporated in an RF-tight case of tin-plated sheet steel. Coaxial feed-through capacitors are used at the input and output of the filter circuit. Filters are available for upright installation on shielding wall.

Installation

Single filters are attached directly to the shielding wall. Larger numbers can be housed in filter cabinets or boxes. Various models and the matching flexible connector fittings are available. Further an adapter housing for flat installation on the shielding exists.

Technical data and measuring conditions

Rated voltage	$V_{R, AC}$	100 V	
Rated voltage	$V_{R, DC}$	100 V	
Rated frequency	f_R	See characteristics	Pass bandwidth at Z_L
Rated current	I_R	100 mA	$T_A = 40\text{ °C}$
Line impedance	Z_L	See characteristics	
Number of lines / line pairs		See characteristics	
Test voltage	V_{test}	250 V DC, 2 s 250 V DC, 2 s	Line/line Line/case
Maximum DC resistance	R_{DC}	See characteristics	
Permissible ambient temperature	T_A	-25 ... +40 °C	
Climatic category (EN 60068-1: 1992)		25/085/56	
Degree of protection (IEC 60529: 2013)		IP 20	
Weight		4.5 kg	

Filters for control and communication lines with HEMP-Protection
100 V AC/DC, 100 mA
B84312CxxxxJ303
Characteristics and ordering codes

I_R	Rated frequency	Z_L	R_{DC}	Circuit diagram	Number of lines / line pairs	Ordering code
A	f_R	Ω	Ω			
0.1	DC ... 3.4	600	14	1	4 line pairs ¹⁾	B84312C0020J303
1	— ¹⁾	— ²⁾	1.4		8 single lines	B84312C0030J303
0.1	DC ... 50	600	4.1		4 line pairs ¹⁾	B84312C0040J303
0.1	DC ... 120	150	8.4	2	4 line pairs	B84312C0050J303
0.1	DC ... 300	150	4.0		4 line pairs	B84312C0060J303
0.1	DC ... 3.4	600	18	3	4 line pairs	B84312C0090J303

1) Control line filters, not matched

2) Not specified

Approvals / Test reports acc. to MIL-STD 188-125-1

 Test report from EMCCons DR. RAŠEK GmbH & Co. KG (www.emcc.de) acc. to MIL-STD 188-125-1 (short and intermediate pulse test) available.



Ordering code	Test report	Response current short pulse	Response current intermediate pulse
B84312C0020J303	EMCC-860009.1GDB, 2017-1-24	Compliant	Compliant
B84312C0030J303	EMCC-860009.1GB, 2016-09-09	Compliant	Compliant
B84312C0040J303	EMCC-860009.1GDB, 2017-1-24	Compliant	Compliant
B84312C0050J303		Compliant	Compliant
B84312C0060J303		Compliant	Compliant
B84312C0090J303		Compliant	Compliant

Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA

B84312CxxxxJ303


Insertion loss a_e as a function of frequency f (typical values) for each line pair

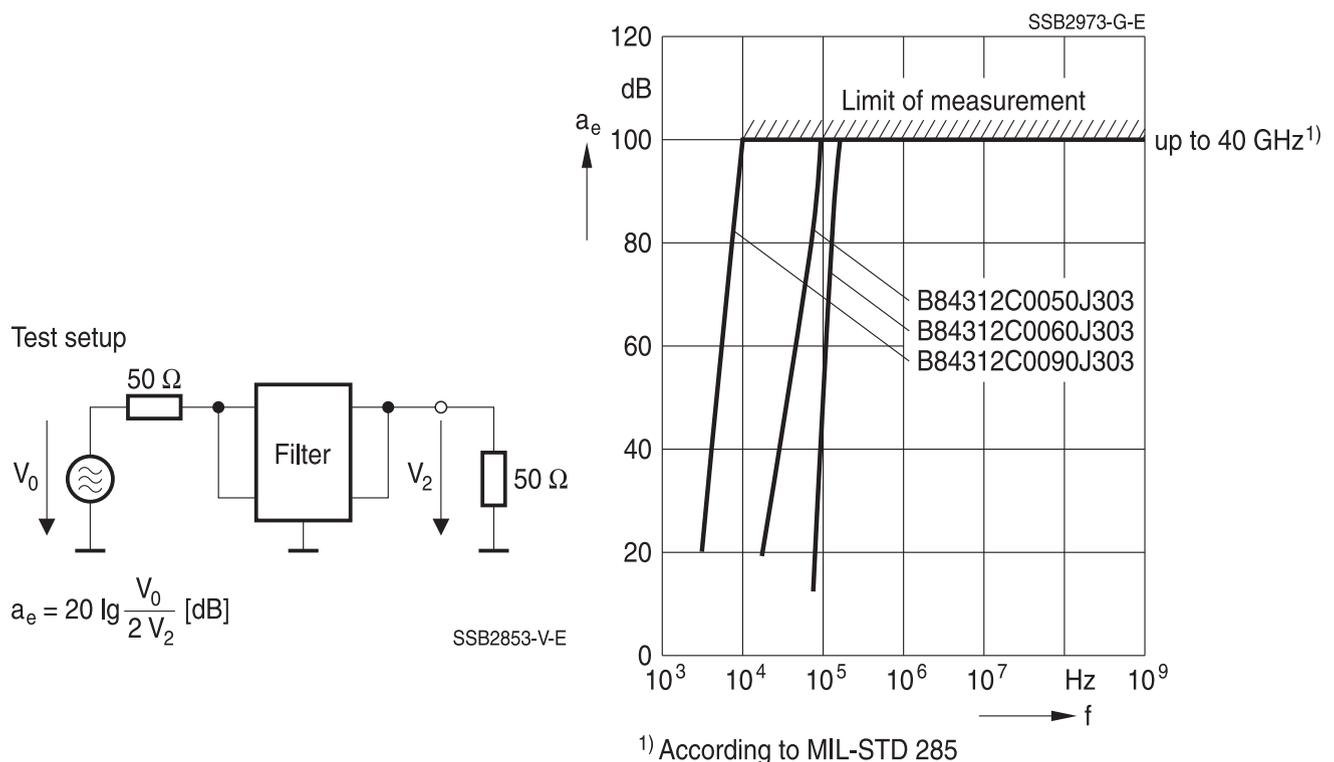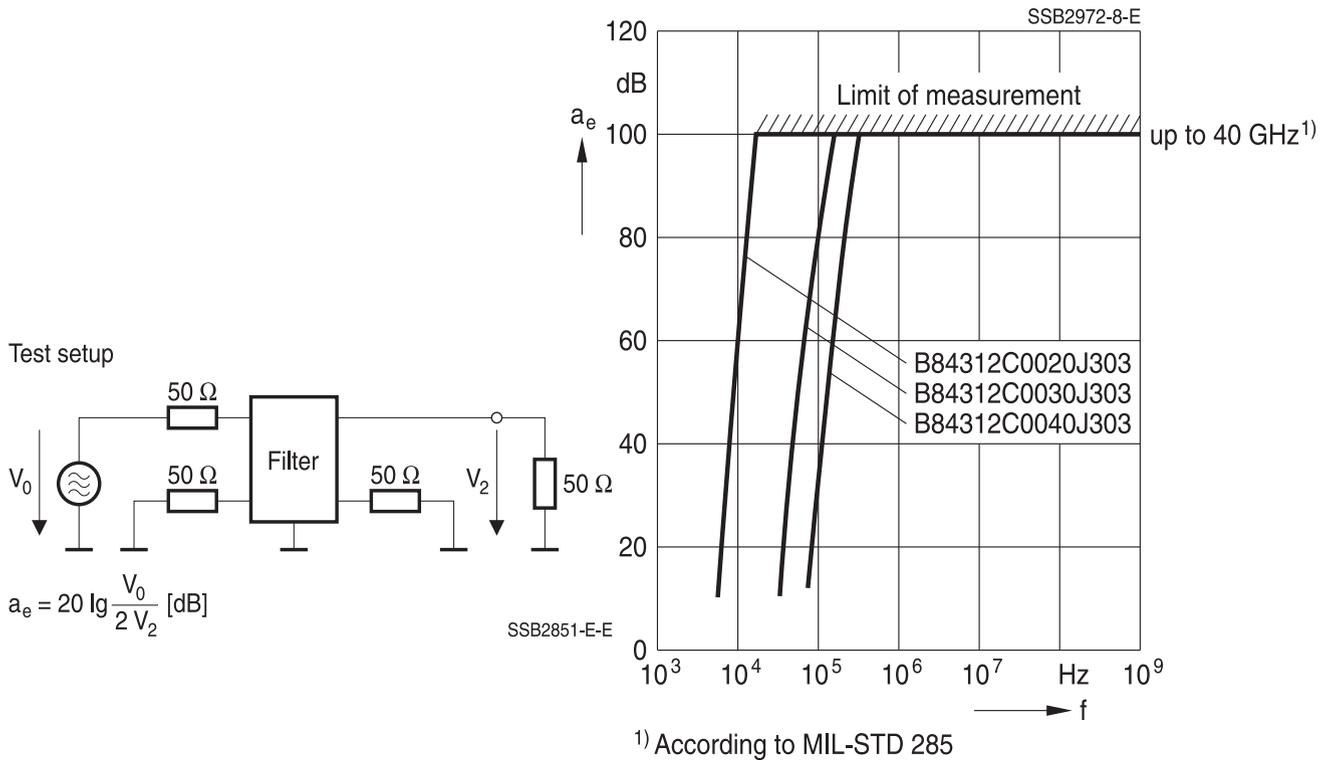

Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA **B84312CxxxxJ303**

Shielding effectiveness of filter housing acc. MIL-STD 188-125-1

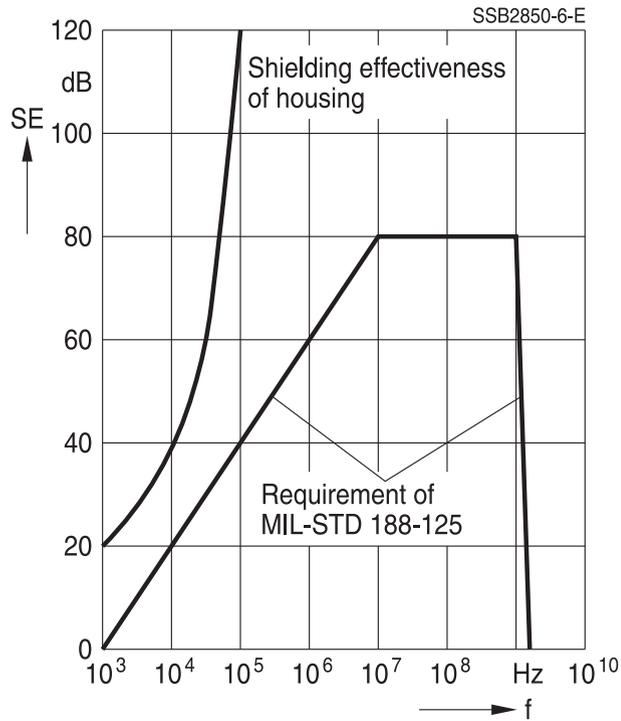


Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA

B84312CxxxxJ303



Insertion loss a_e in the passband (typical values) for each line pair

Insertion loss a_e in the passband (typical values)

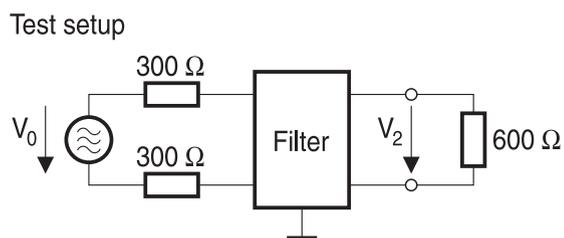


$$a_e = 20 \lg \frac{V_0}{2 V_2} \text{ [dB]}$$

SSB2855-C-E

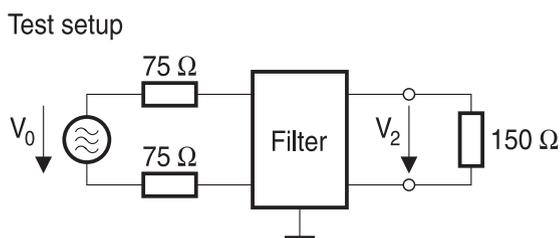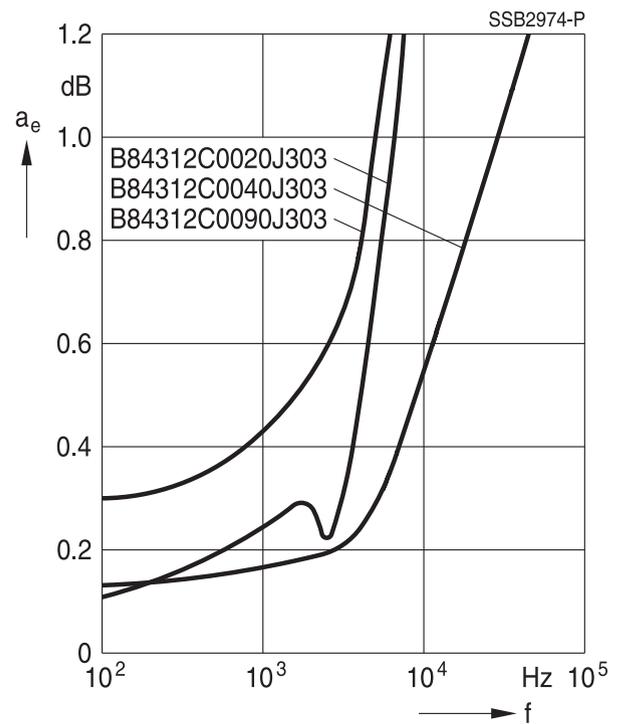

$$a_e = 20 \lg \frac{V_0}{2 V_2} \text{ [dB]}$$

SSB2857-TE

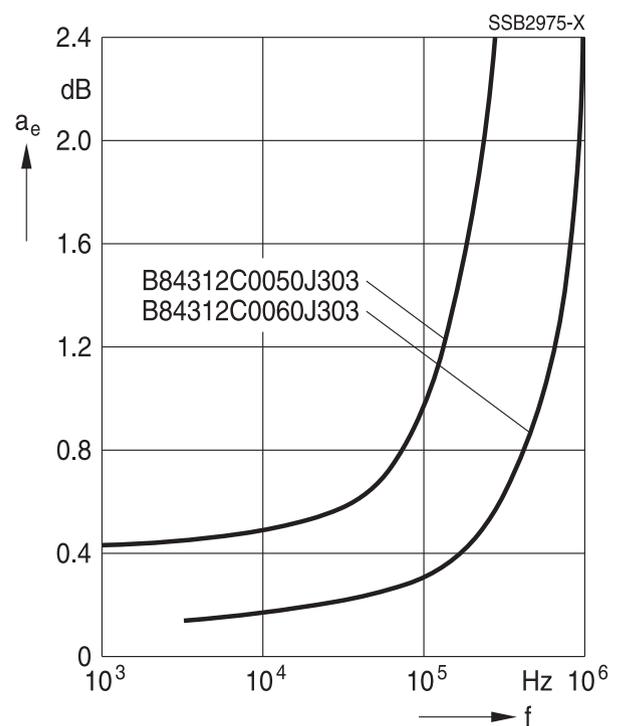


Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA

B84312CxxxxJ303

Common mode rejection of types B84312C0020J303, B84312C0040J303, B84312C0050J303, B84312C0060J303, B84312C0090J303

Test setup

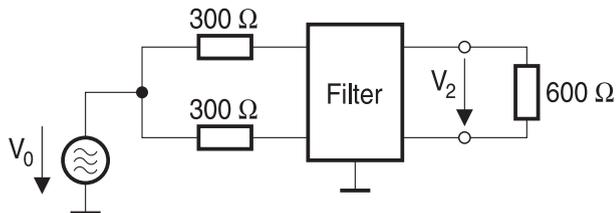


$$CMR = 20 \lg \frac{V_0}{2 V_2} \text{ [dB]}$$

CMR > 40 dB in the pass band

SSB2859-A-E

Circuit diagrams

Circuit diagram 1: B84312C0020J303, B84312C0030J303, B84312C0040J303

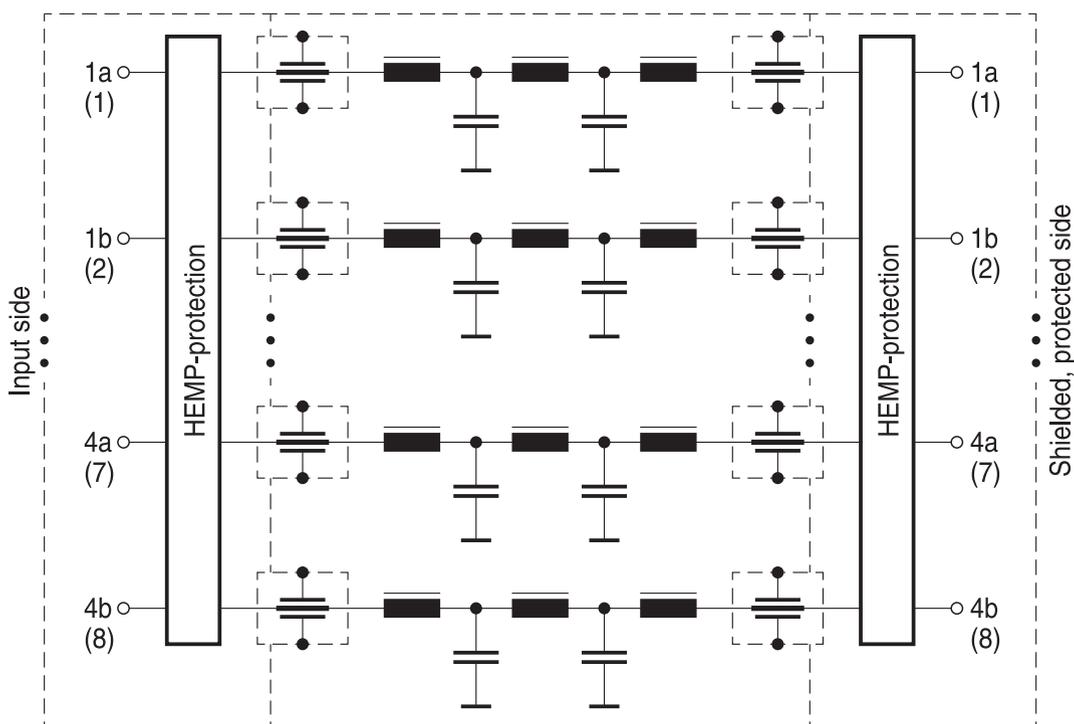


At B84312C0020/C0040J303: only 2 of 4 line pairs shown
At B84312C0030J303: only 4 of 8 lines shown

SSB2976-6-E


Filters for control and communication lines with HEMP-Protection

100 V AC/DC, 100 mA **B84312CxxxxJ303**

Circuit diagram 2: B84312C0050J303, B84312C0060J303

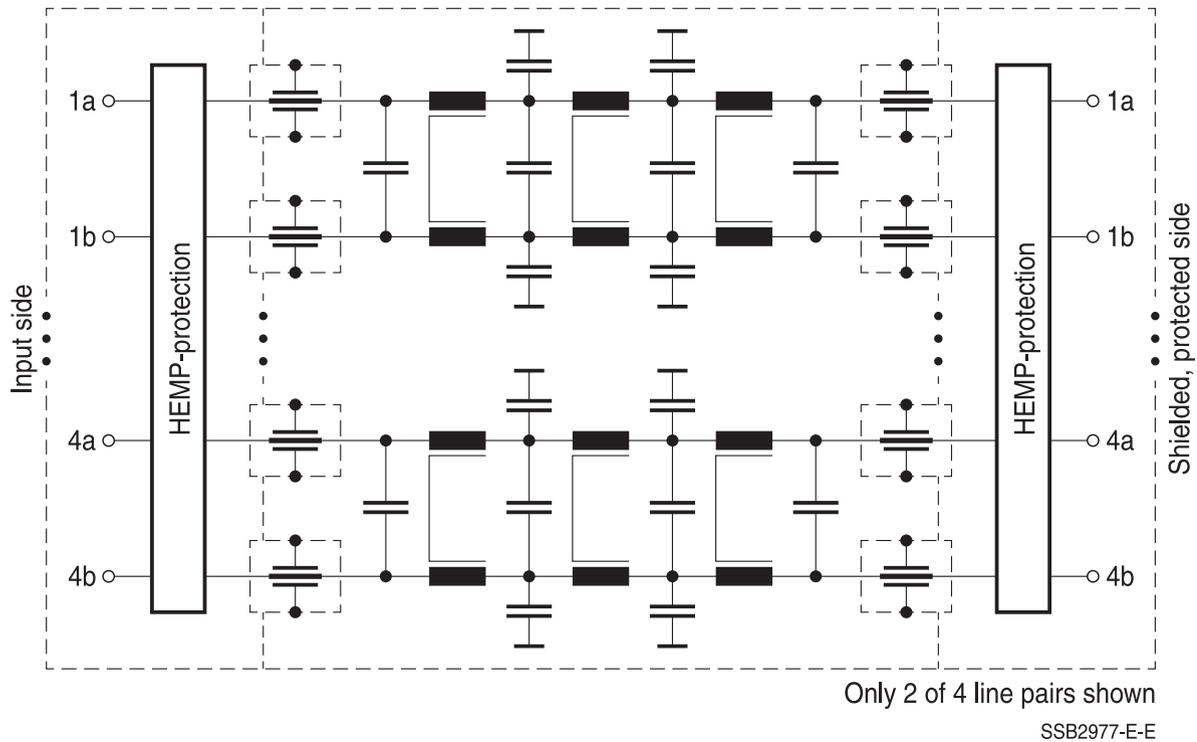

Circuit diagram 3: B84312C0090J303


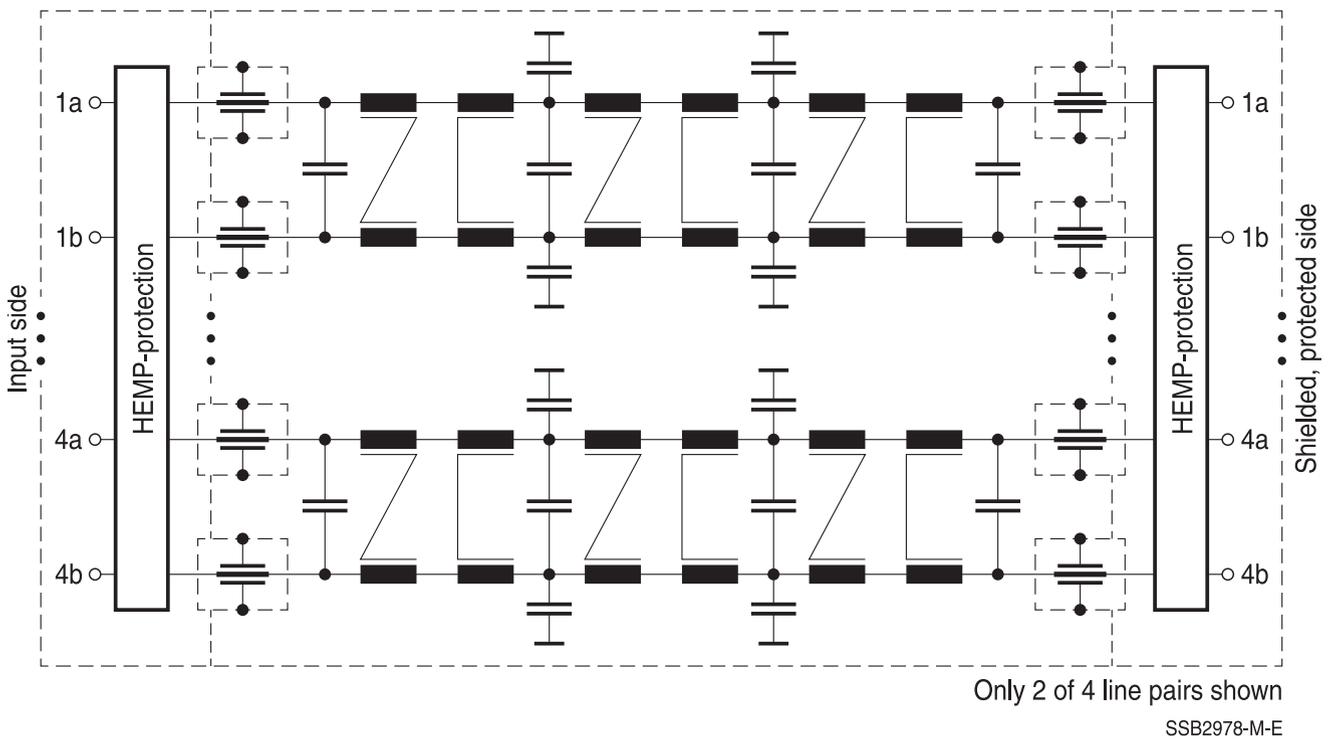


Filters for control and communication lines with HEMP-Protection


100 V AC/DC, 100 mA

B84312CxxxxJ303

Dimensional drawing

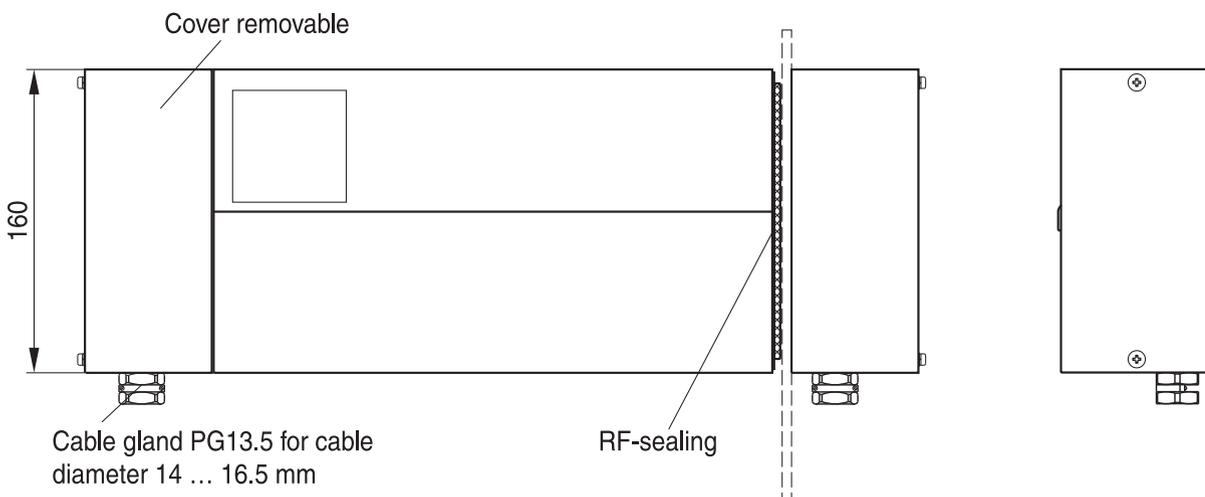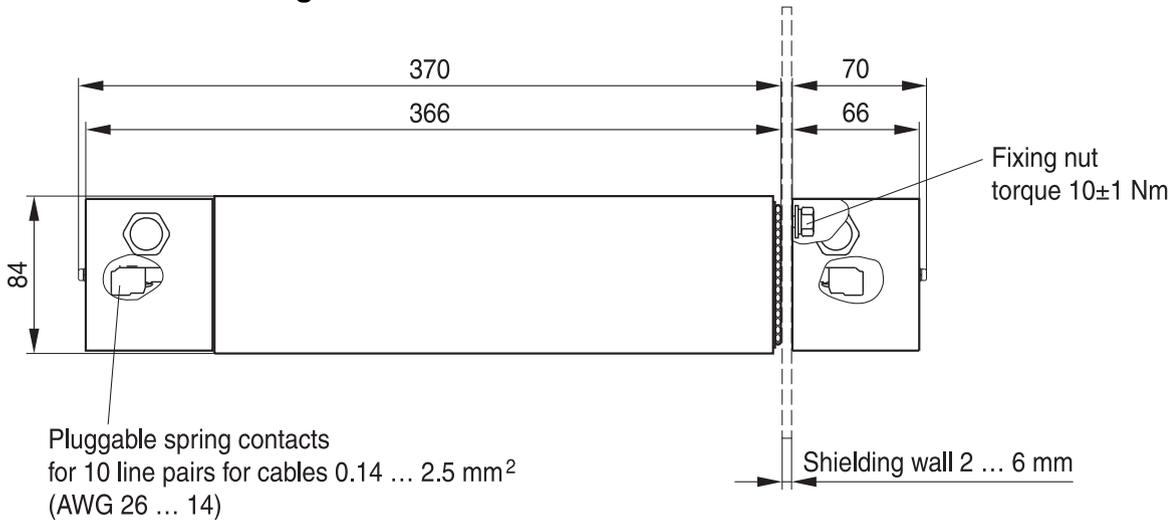

Recess in the mouting wall

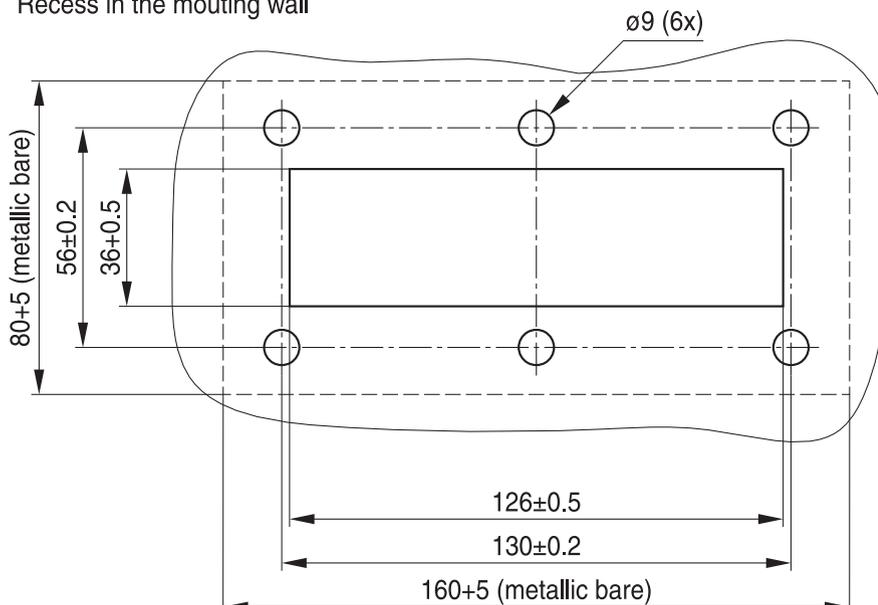


SSB2979-V-E

Filters for control and communication lines with HEMP-Protection


100 V AC/DC, 100 mA

B84312CxxxxJ303

Flat installation of HEMP-Filter with adapter housing B84298M0012C004

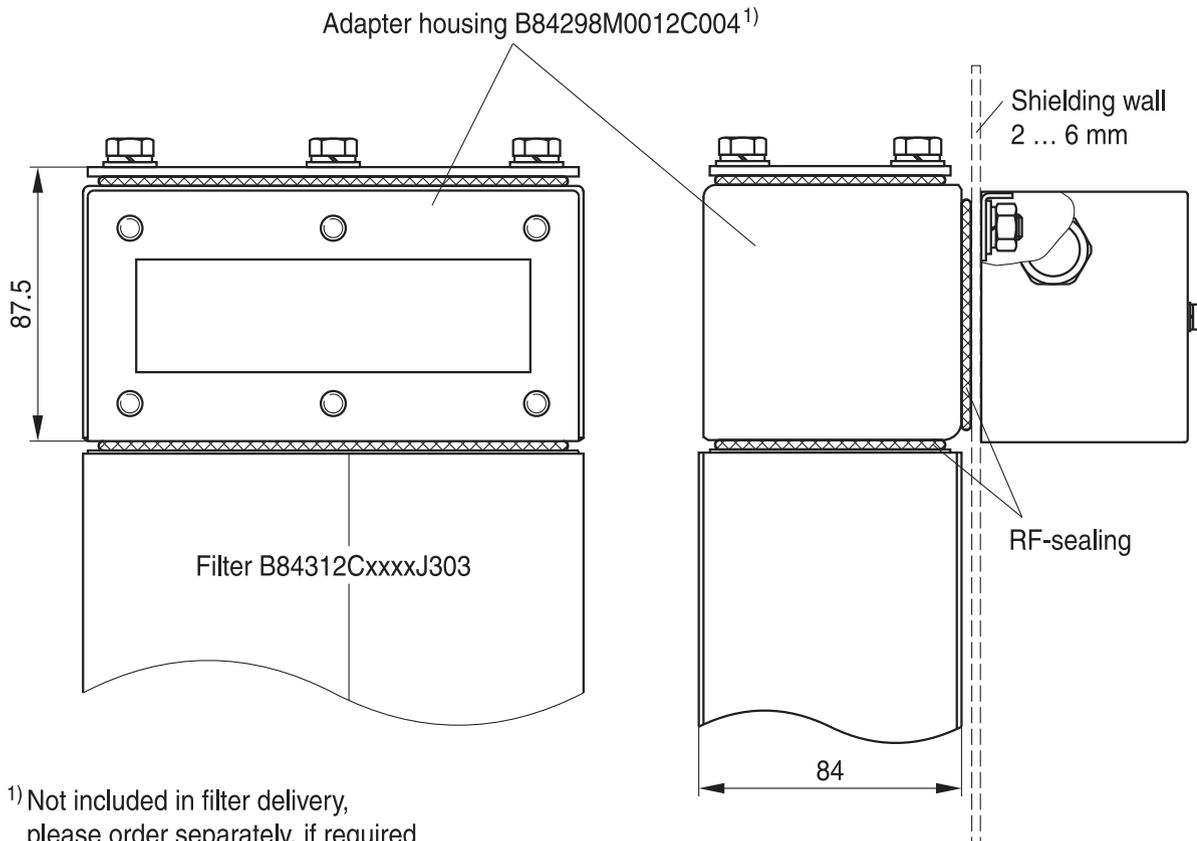

Recess in the mounting wall

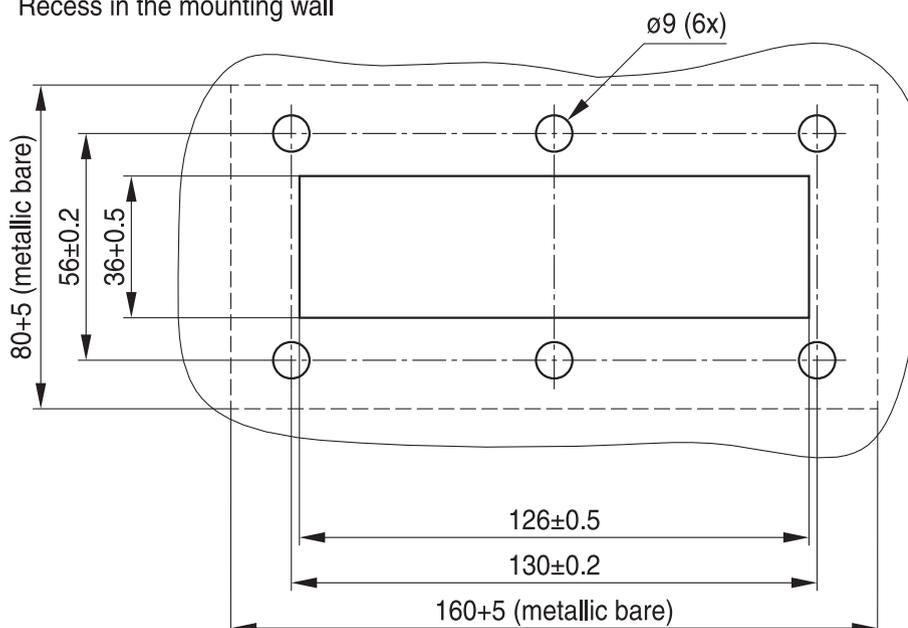

SSB2980-Y-E

Please read all safety and warning notes carefully before installing the filter and putting it into operation. The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The filters may be used only for their intended application within the specified values in low voltage networks in compliance with the instructions given in the data sheets and the data book.

The conditions at the place of application must comply with all specifications for the filter used.

Warning

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. Filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off
- The protective earth connections shall be the first to be made when the filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective earth connection must be observed.
- Impermissible overloading of the filter or filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- Filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective devices.
- In case of leakage currents >3.5 mA you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents $I_L^{(1)} \leq 10$ mA the PE conductor must have a KU value²⁾ of 4.5³⁾; for leakage currents $I_L > 10$ mA the PE conductor must have a KU value of 6⁴⁾.
- Because the product can become very hot during operation, there is the risk of burns if touched. The product can remain hot for some time after the power is switched off!

Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.epcos.com/orderingcodes

1) I_L = leakage current let-go

2) The KU value (symbol KU) is a classification parameter of safety-referred failure types designed to ensure protection against hazardous body currents and excessive heating.

3) I_L = A value of KU = 4.5 with respect to interruptions is attained with: a) permanently connected protective earth connection ≥ 1.5 mm² and b) a protective earth connection ≥ 2.5 mm² via connectors for industrial equipment (IEC 6030902)

4) KU = 6 with respect to interruptions is achieved for fixed-connection lines ≥ 10 mm² where the type of connection and installation correspond to the requirements for PEN conductors as specified in relevant standards.

Filters for control and communication lines with HEMP-Protection
Symbols and terms
B84312CxxxxJ303

Symbol	English	German
dv/dt	Rate of voltage rise	Spannungsanstiegsgeschwindigkeit
f_R	Rated frequency	Bemessungsfrequenz
f_{Pass}	Passband	
I_{LK}	Filter leakage current	Filter-Ableitstrom
$I_{reactive}$	Capacitive reactive current	Kapazitiver Blindstrom
I_N	Nominal current	Nennstrom
I_R	Rated current	Bemessungsstrom
I_{over}	Overcurrent	Überstrom
P_D	Power dissipation	Verlustleistung
R_I	Internal resistance	Innenwiderstand
R_{DC}	Maximum DC resistance	Max. Gleichstromwiderstand (Gleichspannung)
T_A	Ambient temperature	Umgebungstemperatur
T_D	Transverse delay time	
T_R	Rated temperature	Bemessungstemperatur
THD_{max}	Max. permissible harmonic distortion	
V_{br}	Breakdown voltage	
V_{cl}	Max. clamping voltage	
V_N	Nominal network voltage	Netzspannung
V_{test}	Test voltage	Prüfspannung
V_R	Rated voltage	Bemessungsspannung
Z	Impedance	Scheinwiderstand
Z_L	Line impedance	Leitungsimpedanz
α_e	Insertion loss	Einfügungsdämpfung
ΔV	Voltage drop	Spannungsabfall

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2018-10