

20W multi-current with dip switch ELV/Triac Dimmable CC LED driver

(Multi-output current with DIP switch adjustable) (10W, 20W, 40W, 60W available)

■ Features:

- Output constant current
- Range AC input :100-277VAC
- Efficiency up to 78%
- Built-in active PFC function
- Protections: short circuit/over current
- Full protection plastic housing easy installation
- IP20 design for installation at dry&damp location
- Cooling by free air convection
- Dimming function: Triac/phase cut dimming
Work with leading or trailing edge Triac dimmer
(ON key: leading edge; 1 key: trailing edge)
- Strong compatibility, flicker-free dimming
- Suitable for LED lighting and moving sign applications
- UL Listed Class 2, Class P
- 7 years warranty




Specification:

Model		SMT-M-020CT							
Output	Rated current (mA)	700mA TTT	600mA TTT	550mA TTT	500mA TTT	450mA TTT	400mA TTT	350mA TTT	250mA TTT
	Current Tolerance	±5%							
	DC Voltage	3-29V	3-33V	3-36V	3-40V	3-42V	3-42V	3-42V	3-42V
	Rated power	20.3W	19.8W	19.8W	20W	18.9W	16.8W	14.7W	10.5W
Input	Rated Input Voltage	100-277VAC							
	Rated Frequency	47-63HZ							
	Power Factor	Full loading ≥ 0.9@110VAC, ≥ 0.93@277VAC							
	Efficiency (Typ.)	Full loading ≥ 78%@110VAC, ≥ 80%@277VAC							
	AC Current (Max.)	0.15A							
	Inrush Current (Typ.)	2.96A, 7.6us @ 50%Ipeak at 100-277VAC							
	Leakage current	<0.50mA							
Protection	Short Circuit	Constant current mode, recovers automatically after fault condition is removed							
	Output No-Load Voltage	52V max.							
	Over temperature	Ambient temp. over 50±5℃, output current will be reduced to 50%; Ambient temp. over 60±5℃, output will be off; recovers automatically after temp. drops.							
	Protection Class:	II							
Environ- ment	Working TEMP.	-30-+60℃							
	Working Humidity	20-90%RH, non-condensing							
	Storage TEMP. Humidity	-30-+80℃, 10-95%RH							
	TEMP. coefficient	±0.03%/℃ (0-50℃)							
	Vibration	10-500Hz, 2G 10min./1 cycle, period for 60min. each along X,Y,Z axes							

Safety	Safety standards	EN61347-1 EN61347-2-13 UL8750
	Withstand voltage	I/P-O/P:3.75KVAC
	Isolation resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH
Others	Weight	0.115Kg
	Size	159.5*43*20mm(L*W*H)
	packing	340*250*135mm (50PCS/CTN) for outer carton 6.52KG/CTN
Notes	1. All parameters NOT specially mentioned are measured at 110V,277VAC input, rated load and 25℃of ambient temperature. 2. Tolerance: includes set us tolerance, line regulation and load regulation.	


■ Mechanical Specification:

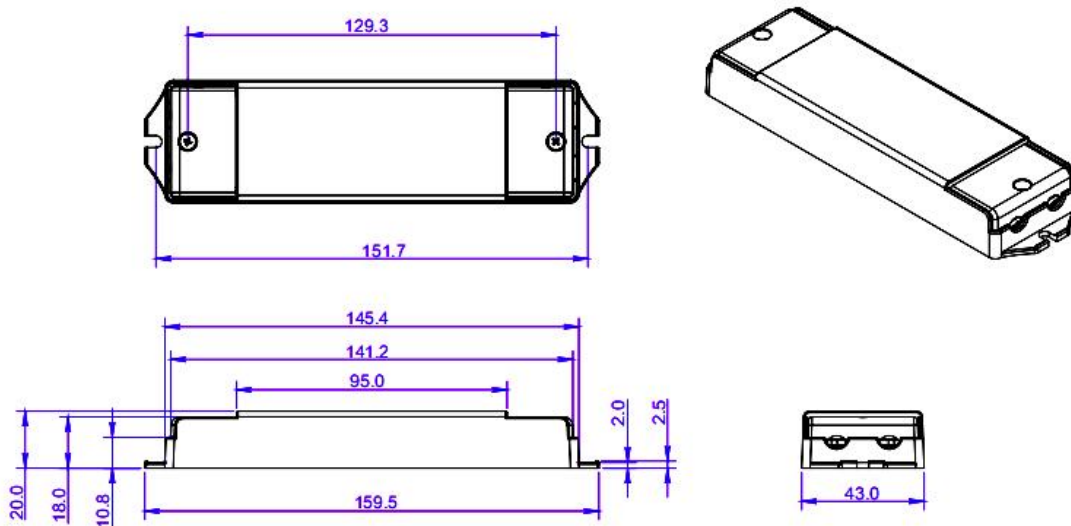

- Input with DG126 terminals 3P: Live Wire AC (L), Neutral Wire AC(N)
- Output LED SEC with DG126 terminals 2P: output Positive (LED+), output negative (LED-). Connected to LED Lamps.
- Suggested wire diameter: Input 0.75-2mm²; Output:0.5-2mm².

Note: Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

■ Derating Curve

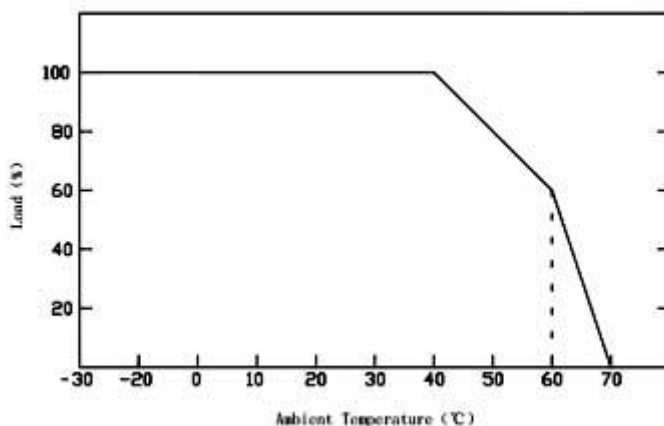

- To extend their life, please refer to the Derating Curve and derate according to the temperature.

■ Dimming Operation

- Output constant current level can be adjusted through input terminal of the AC phase line(L) by connection a Triac dimmer.
- Usually matching with leading edge and trailing edge dimmer both.


At the input area, you will find dip switch on the terminal.

ON key for leading edge; 1 key for trailing edge. (see right picture)




- please try to use the small power dimmer, have access to a wider dimming range, high-power dimmer is difficult to achieve the output current to zero
- please try to use dimmers with power at least 2 times as the output power of the driver.

■ Connecting Diagram in Single (I)

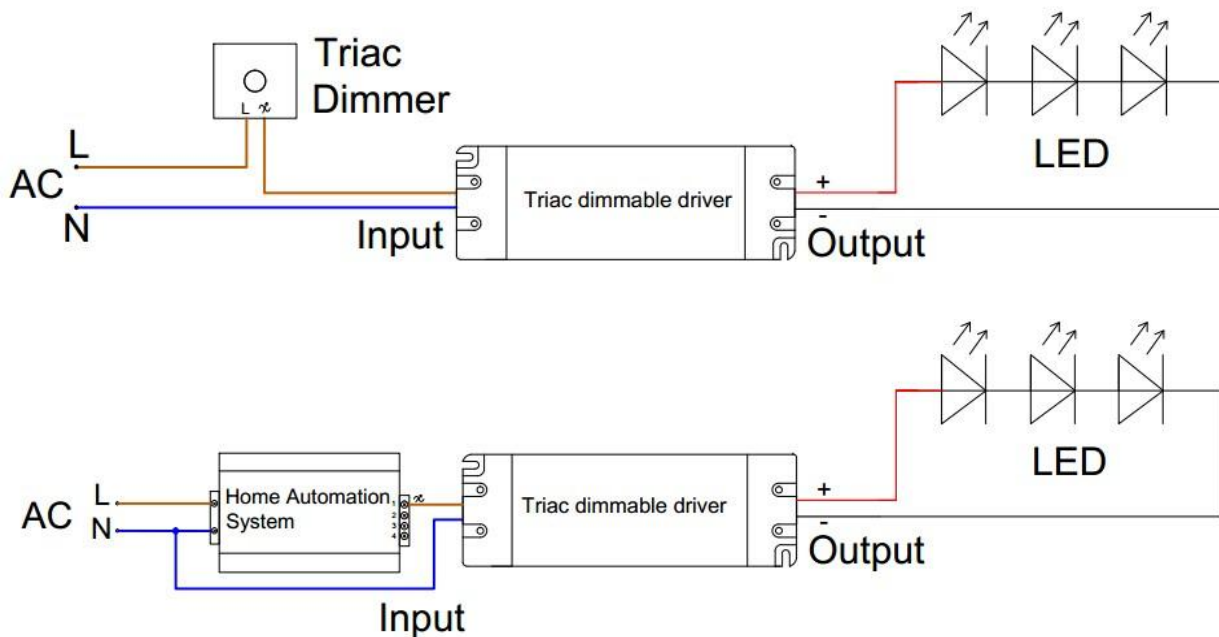

■ Connecting Diagram Multiple (II)

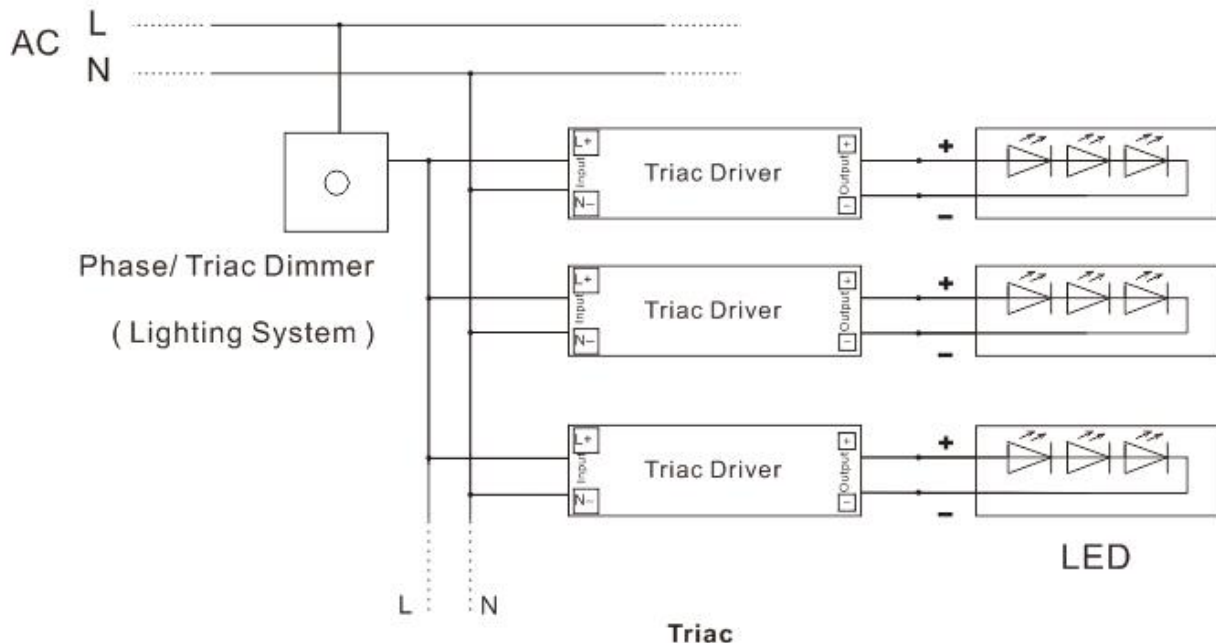

■ Instruction:

- This driver should be installed by qualified and professional person;
- Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- Ensure that wiring is correct before test in order to avoid light and power supply damage;