12-V General Purpose Analog Switch

Features

- Analog Switch Voltage: 3.3 V, 5 V, 10 V, ±5 V
- Low ON-State Resistance:
  - Typical 50 Ω at V_S = ±4.5 V or 9 V
  - Typical 60 Ω at V_S = 4.5 V
  - Typical 300 Ω at V_S = 3 V
- Bandwidth: 200 MHz
- Fast switching times: t_{ON} = 60 ns, t_{OFF} = 50 ns
- Break-Before-Make Switching
- Operation Temperature Range: −40°C to 125°C

Applications

- Industry Control Systems
- Battery-Powered Systems
- Audio Signal Routing
- Instrumentation

Description

The TPW4052 is a dual SP4T analog switch suitable for use in analog or digital multiplexer/demultiplexer applications. The switch features three digital select inputs (S0, S1), eight independent inputs/outputs (An, Bn), two common input/output (A, B), and a digital enable input (/E). When /E is HIGH, the switches are turned off.

The device is designed on an enhanced process that provides lower power dissipation yet gives high switching speeds. The device can operate equally well as either multiplexers or de-multiplexers and has an input range that extends to the supplies. All channels exhibit break-before-make switching action, preventing momentary shorting when switching channels.

Switch Selection Guide

Product	Switch Configuration	Supply Voltage (V)	Ron (OHM)	Bandwidth (MHz)	Package
TPW4051	8:1	12	50	200	SOP16, TSSOP16, QFN16
TPW4052	(4:1) × 2	12	50	200	SOP16, TSSOP16
TPW4053	(2:1) × 3	12	50	200	SOP16, TSSOP16
TPW3111	1:1	5.5	1	100	SC70-5
TPW3115	1:1	5.5	5	250	SC70-5, SOT23-5
TPW4157	2:1	5.5	1	100	SC70-6
TPW3157A	2:1	5.5	2	100	SC70-6
TPW3221	(2:1) × 2	5.5	1	100	MSOP10
TPW3223	(2:1) × 2	5.5	1	100	QFN10, 1.4 × 1.8mm

Table of Contents

Features **1**
Applications **1**
Description **1**
Switch Selection Guide **1**
Revision History **3**
Pin Configuration and Functions **4**
Specifications **6**
Absolute Maximum Ratings (1) 6
ESD, Electrostatic Discharge Protection 6
Thermal Information 6
Recommended Operating Conditions (1) 6
Electrical Characteristics 8
Electrical Characteristics 10
Electrical Characteristics 12
Electrical Characteristics 14
Typical Performance Characteristics 16
Test Circuit and Waveforms 17
Application and Implementation **18**
Application Information 18
Tape and Reel Information **19**
Package Outline Dimensions **20**
SOP16 20
TSSOP16 21
Order Information **22**
IMPORTANT NOTICE AND DISCLAIMER **23**

Revision History

Date	Revision	Notes
2018-08-08	Rev.Pre.0	Pre-released version.
2019-03-04	Rev.A.0	Initial version.
2019-10-02	Rev.A.1	HBM: 2 kV → 1 kV.
2019-12-25	Rev.A.2	Corrected the test conditions of RON and the switch leakage to follow the product test (the product test is not changed): Corrected all “0 V” to “V_{EE}”; Removed On Resistance Match between Channels at 3 to 3.6 V V_{CC}; Corrected On Resistance Match between Channels at 9 to 11 V V_{CC}: V_{IS} = 3.5 V → V_{IS} = 1 V; Corrected On Resistance Match between Channels at 4.5 to 5.5 V V_{CC}, V_{EE} = −4.5 V to 5.5 V: V_{IS} = 3.5 V → V_{IS} = −3.5 V.
2020-01-14	Rev.A.3	Corrected the “P0” information of TR in Tape and Reel Information.
2024-12-04	Rev.A.4	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. Updated to a new datasheet format. Updated the Tape and Reel Information. Updated the Package Outline Dimensions.

Pin Configuration and Functions

TPW4052
SOP16/TSSOP16
Top View

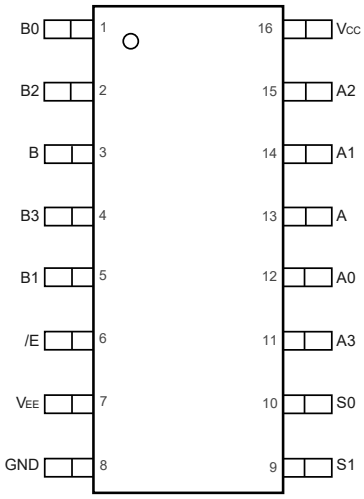

Table 1. Pin Functions

Pin No.	Name	I/O	Description
1	B0	I/O	Channel B0 input or output.
2	B2	I/O	Channel B2 input or output.
3	B	I/O	B common input or output.
4	B3	I/O	Channel B3 input or output.
5	B1	I/O	Channel B1 input or output.
6	/E	Input	Enable switches, active low.
7	V_{EE}		Negative power input.
8	GND		Ground.
9	S1	Input	Control input.
10	S0	Input	Control input.
11	A3	I/O	Channel A3 input or output.
12	A0	I/O	Channel A0 input or output.
13	A	I/O	A common input or output.
14	A1	I/O	Channel A1 input or output.
15	A2	I/O	Channel A2 input or output.
16	V_{CC}		Positive power Input.

Table 2. Functional Table

/E, Enable	S2	S1	S0	ON Channel
L	NA	L	L	A0, B0

L	NA	L	H	A1, B1
L	NA	H	L	A2, B2
L	NA	H	H	A3, B3
H	NA	X	X	None

(1) X = Don’t care, NA = Not Available.

Specifications

Absolute Maximum Ratings (1)

Parameter		Min	Max	Unit
	Supply Voltage, V_{CC} − V_{EE}	−0.5	13	V
	Supply Voltage, V_{CC} − GND	−0.5	13	V
	Supply Voltage, V_{EE} − GND	−6.5	0.5	V
	Analog Switch Voltage	VEE − 0.5	V_{CC} + 0.5	V
	Analog Switch Current	−25	+25	mA
	Analog Switch Diode Current	−20	+20	mA
	Digital Input Voltage, /E, S2, S1, S0	GND	V_{CC} + 0.5	V
	Digital Input Diode Current	−20	+20	mA
T_J	Maximum Junction Temperature		150	°C
T_{STG}	Storage Temperature Range	−65	150	°C
T_L	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 (1)	1	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 (2)	1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOP16	100	50	°C/W
TSSOP16	150	60	°C/W

Recommended Operating Conditions (1)

All test conditions: Over operating temperature range, unless otherwise noted.

Parameter	Min	Max	Unit
Supply Voltage, V_{CC} − V_{EE}	3	12	V
Supply Voltage, V_{CC} − GND (2)	3	12	V

Parameter	Min	Max	Unit
Supply Voltage, V_{EE} − GND (2)	−6	0	V
Select Input Voltage	0	V_{CC}	V
Input Transition Rise and Fall Rate		100	ns/V
Switch I/O Port Voltage	V_{EE}	V_{CC}	V
Operating Temperature Range	−40	125	°C

(1) Select input must be held HIGH or LOW and it must not float.
(2) The voltage of V_{CC}, V_{EE} need be in the range of V_{CC} − V_{EE}.

Electrical Characteristics

All test conditions: single supply, V_{CC} = 4.5 V to 5.5 V, V_{EE} = 0 V, GND = 0 V, unless otherwise noted.

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	V_{IN} = 0 V or V_{CC}	5.5	4	6	8	Max	μA
Digital Input								
V_{IH}	Input Voltage High				2.0	2.0	Min	V
V_{IL}	Input Voltage Low				0.8	0.8	Max	V
I_{IN}	Control Input Leakage	V_{IN} = 0 V or V_{CC}	5.5	±0.4	±1	±1	Max	μA
Analog Switch								
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	4.5	60			Typ	Ω
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	4.5	100	130	150	Max	Ω
ΔR_{ON}	On Resistance Match Between Channels	I_{OUT} = 1 mA, V_{IS} = 2.5 V	4.5	20	30	35	Max	Ω
$R_{FLAT (ON)}$	On Resistance Flatness	I_{OUT} = 1 mA	4.5	60	80	80	Max	Ω
$I_{CH (OFF)}$	Switch OFF Leakage Current on Channel	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE}	5.5	±0.4	±1	±1	Max	μA
$I_{COM (OFF)}$	Switch OFF Leakage Current on Common	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE},	5.5	±0.4	±2	±2	Max	μA
$I_{(ON)}$	Switch ON Leakage Current	V_{IS} = V_{EE} or V_{CC}	5.5	±0.4	±2	±2	Max	μA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT time	C_L = 50 pF	4.5	5			Typ	ns
t_{ON}	Switch Turn-on Time	C_L = 50 pF	4.5	60			Max	ns
t_{OFF}	Switch Turn-off Time	C_L = 50 pF	4.5	50			Max	ns
	OFF-Isolation	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	5	−70			Typ	dB
	Crosstalk in Channel	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	5	−70			Typ	dB
	Crosstalk in Control	Between control and any switch; R_L = 600 Ω; f = 1 MHz; E or Sn square wave between V_{CC} and GND	5	110			Typ	mV
BW	Bandwidth	R_L = 50 Ω	5	200			Typ	MHz
THD	Total Harmonic Distortion	R_L = 10 kΩ, f = 1 kHz	5	0.05			Typ	%

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Capacitance								
C_{IN}	Switch Input Capacitance		5	5			Typ	pF
C_{COM}	Common Output Capacitance		5	12			Typ	pF
C_{PD}	Power Dissipation Capacitance		5	50			Typ	pF

Electrical Characteristics

All test conditions: single supply, V_{CC} = 3 V to 3.6 V, V_{EE} = 0 V, GND = 0 V, unless otherwise noted.

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	V_{IN} = 0 V or V_{CC}	3.6	4	6	8	Max	μA
Digital Input								
V_{IH}	Input Voltage High				2.0	2.0	Min	V
V_{IL}	Input Voltage Low				0.8	0.8	Max	V
I_{IN}	Control Input Leakage	V_{IN} = 0 V or V_{CC}	3.6		±1	±1	Max	μA
Analog Switch								
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	3	300			Typ	Ω
$R_{FLAT (ON)}$	On Resistance Flatness	I_{OUT} = 1 mA	3	100			Max	Ω
$I_{CH (OFF)}$	Switch OFF Leakage Current on Channel	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE}	3.6	±0.4	±1	±1	Max	μA
$I_{COM (OFF)}$	Switch OFF Leakage Current on Common	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE},	3.6	±0.4	±2	±2	Max	μA
$I_{(ON)}$	Switch ON Leakage Current	V_{IS} = V_{EE} or V_{CC}	3.6	±0.4	±2	±2	Max	μA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT time	C_L = 50 pF	3	5			Typ	ns
t_{ON}	Switch Turn-on Time	C_L = 50 pF	3	70			Max	ns
t_{OFF}	Switch Turn-off Time	C_L = 50 pF	3	60			Max	ns
	OFF-Isolation	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	3.3	−70			Typ	dB
	Crosstalk in Channel	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	3.3	−70			Typ	dB
	Crosstalk in Control	Between control and any switch; R_L = 600 Ω; f = 1 MHz; E or Sn square wave between V_{CC} and GND	3.3	110			Typ	mV
BW	Bandwidth	R_L = 50 Ω	3.3	200			Typ	MHz
THD	Total Harmonic Distortion	R_L = 10 kΩ, f = 1 kHz	3.3	0.2			Typ	%
Capacitance								
C_{IN}	Switch Input Capacitance		3.3	5			Typ	pF
C_{COM}	Common Output Capacitance		3.3	12			Typ	pF

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
C_{PD}	Power Dissipation Capacitance		3.3	50			Typ	pF

Electrical Characteristics

All test conditions: single supply, V_{CC} = 9 V to 11 V, V_{EE} = 0 V, GND = 0 V, unless otherwise noted.

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	V_{IN} = 0 V or V_{CC}	9	8	12	16	Max	μA
Digital Input								
V_{IH}	Input Voltage High				2.4	2.4	Min	V
V_{IL}	Input Voltage Low				0.8	0.8	Max	V
I_{IN}	Control Input Leakage	V_{IN} = 0 V or V_{CC}	11	±0.4	±1	±1	Max	μA
Analog Switch								
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	9	50			Typ	Ω
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	9	80	95	105	Max	Ω
ΔR_{ON}	On Resistance Match Between Channels	I_{OUT} = 1 mA, V_{IS} = 1 V	9	15	25	30	Max	Ω
$R_{FLAT (ON)}$	On Resistance Flatness	I_{OUT} = 1 mA	9	30	40	40	Max	Ω
$I_{CH (OFF)}$	Switch OFF Leakage Current on Channel	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE}	11	±0.4	±1	±1	Max	μA
$I_{COM (OFF)}$	Switch OFF Leakage Current on Common	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE},	11	±0.4	±2	±2	Max	μA
$I_{(ON)}$	Switch ON Leakage Current	V_{IS} = V_{EE} or V_{CC}	11	±0.4	±2	±2	Max	μA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT time	C_L = 50 pF	9	5			Typ	ns
t_{ON}	Switch Turn-on Time	C_L = 50 pF	9	60			Max	ns
t_{OFF}	Switch Turn-off Time	C_L = 50 pF	9	50			Max	ns
	OFF-Isolation	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	10	−70			Typ	dB
	Crosstalk in Channel	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	10	−70			Typ	dB
	Crosstalk in Control	Between control and any switch; R_L = 600 Ω; f = 1 MHz; E or Sn square wave between V_{CC} and GND	10	220			Typ	mV
BW	Bandwidth	R_L = 50 Ω	10	200			Typ	MHz
THD	Total Harmonic Distortion	R_L = 10 kΩ, f = 1 kHz	10	0.03			Typ	%

Parameter		Conditions	V_{CC} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Capacitance								
C_{IN}	Switch Input Capacitance		10	5			Typ	pF
C_{COM}	Common Output Capacitance		10	12			Typ	pF
C_{PD}	Power Dissipation Capacitance		10	50			Typ	pF

Electrical Characteristics

All test conditions: dual supply, V_{CC} = 4.5 V to 5.5 V, V_{EE} = −4.5 V to 5.5 V, GND = 0 V, unless otherwise noted.

Parameter		Conditions	V_{CC}/V_{EE} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	V_{IN} = 0 V or V_{CC}	5.5/−5.5	8	12	16	Max	μA
Digital Input								
V_{IH}	Input Voltage High				70% × V_{CC}	70% × V_{CC}	Min	V
V_{IL}	Input Voltage Low				30% × V_{CC}	30% × V_{CC}	Max	V
I_{IN}	Control Input Leakage	V_{IN} = 0 V or V_{CC}	5.5/−5.5	±0.4	±1	±1	Max	μA
Analog Switch								
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	4.5/−4.5	50			Typ	Ω
R_{ON}		I_{OUT} = 1 mA, V_{IS} = V_{EE} or V_{CC}	4.5/−4.5	80	95	105	Max	Ω
ΔR_{ON}	On Resistance Match Between Channels	I_{OUT} = 1 mA, V_{IS} = −3.5 V	4.5/−4.5	15	25	30	Max	Ω
$R_{FLAT (ON)}$	On Resistance Flatness	I_{OUT} = 1 mA	4.5/−4.5	30	40	40	Max	Ω
$I_{CH (OFF)}$	Switch OFF Leakage Current on Channel	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE}	5.5/−5.5	±0.4	±1	±1	Max	μA
$I_{COM (OFF)}$	Switch OFF Leakage Current on Common	V_{IS} = V_{EE}, V_{OS} = V_{CC}; or V_{IS} = V_{CC}, V_{OS} = V_{EE},	5.5/−5.5	±0.4	±2	±2	Max	μA
$I_{(ON)}$	Switch ON Leakage Current	V_{IS} = V_{EE} or V_{CC}	5.5/−5.5	±0.4	±2	±2	Max	μA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT time	C_L = 50 pF	4.5/−4.5	5			Typ	ns
t_{ON}	Switch Turn-on Time	C_L = 50 pF	4.5/−4.5	60			Max	ns
t_{OFF}	Switch Turn-off Time	C_L = 50 pF	4.5/−4.5	50			Max	ns
	OFF-Isolation	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	5/−5	−70			Typ	dB
	Crosstalk in Channel	f = 1 MHz, R_L = 50 Ω, C_L = 10 pF	5/−5	−70			Typ	dB

Parameter		Conditions	V_{CC}/V_{EE} (V)	25°C	−40°C to 85°C	−40°C to 125°C	Limit	Unit
	Crosstalk in Control	Between control and any switch; R_L = 600 Ω; f = 1 MHz; E or Sn square wave between V_{CC} and GND	5/−5	220			Typ	mV
BW	Bandwidth	R_L = 50 Ω	5/−5	100			Typ	MHz
THD	Total Harmonic Distortion	R_L = 10 kΩ, f = 1 kHz	5/−5	0.03			Typ	%
Capacitance								
C_{IN}	Switch Input Capacitance		5/−5	5			Typ	pF
C_{COM}	Common Output Capacitance		5/−5	12			Typ	pF
C_{PD}	Power Dissipation Capacitance		5/−5	50			Typ	pF

Typical Performance Characteristics

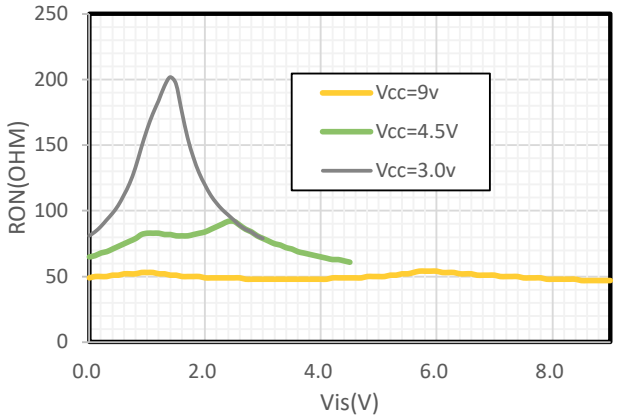

Figure 1. R_{ON} vs. V_{IS}

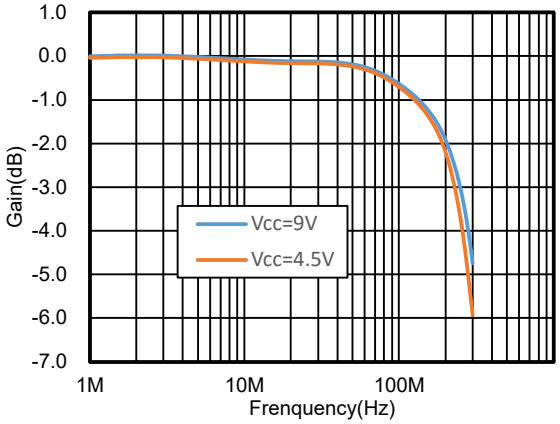

Figure 2. Bandwidth

Test Circuit and Waveforms

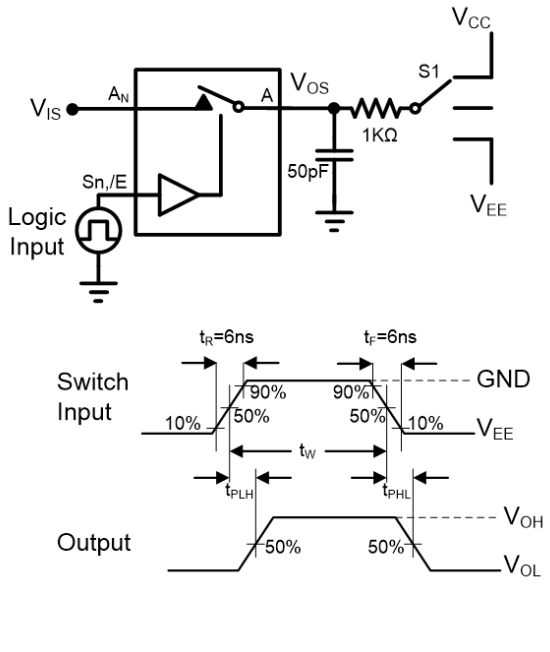

Parameter	Vis	S1 Position
t_{PHL} ,t_{PLH}	Pulse	Open
t_{PZH} ,t_{PHZ}	V_{CC}	V_{EE}
t_{PZL} ,t_{PLZ}	V_{EE}	V_{CC}

t_{ON}: t_{PZH} or t_{PZL}
t_{OFF}: t_{PHZ} or t_{PLZ}

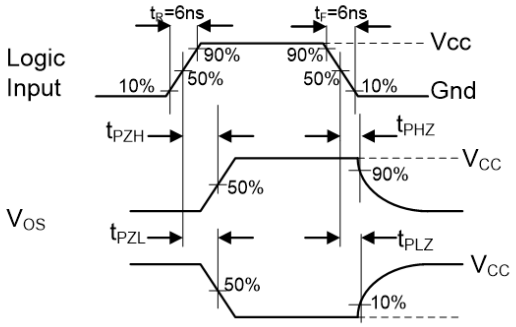

Figure 3. AC Test Circuit and Test Waveforms

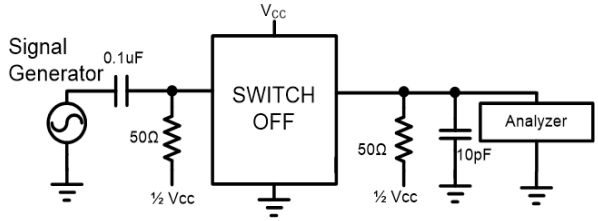

Figure 4. Off Isolation

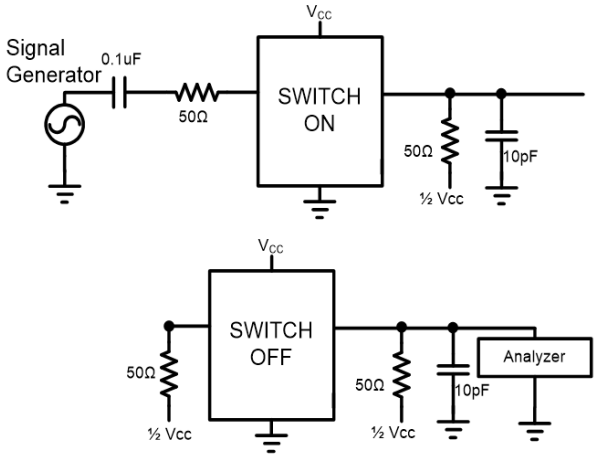

Figure 5. Crosstalk

Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

A 0.1-μF bypass capacitor on V_{CC} and GND is recommended to prevent power disturbance. Another 0.1-μF bypass capacitor on V_{EE} and GND is also recommended if the V_{EE} is not connected to GND.

Tape and Reel Information

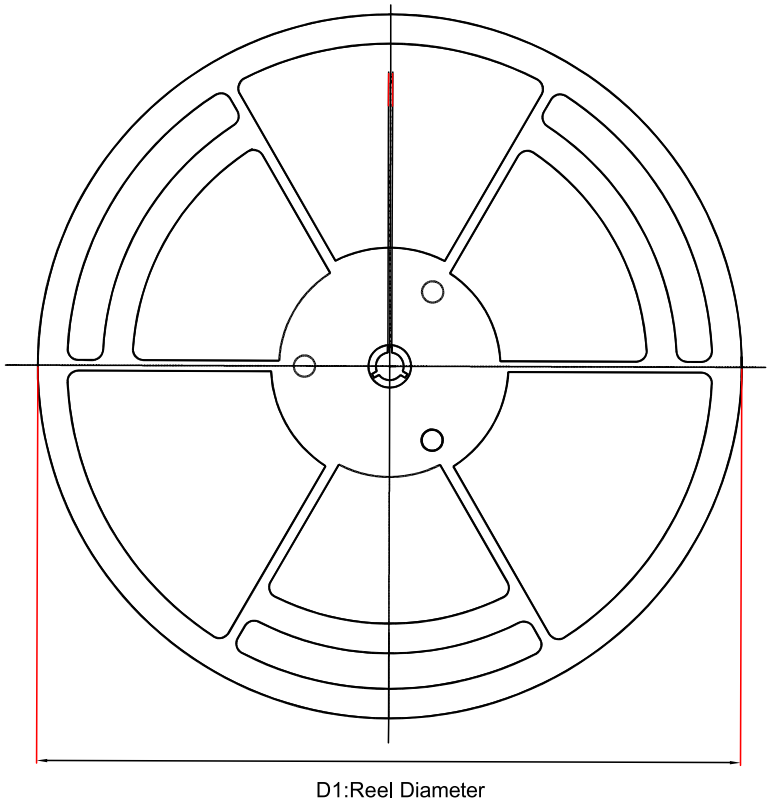



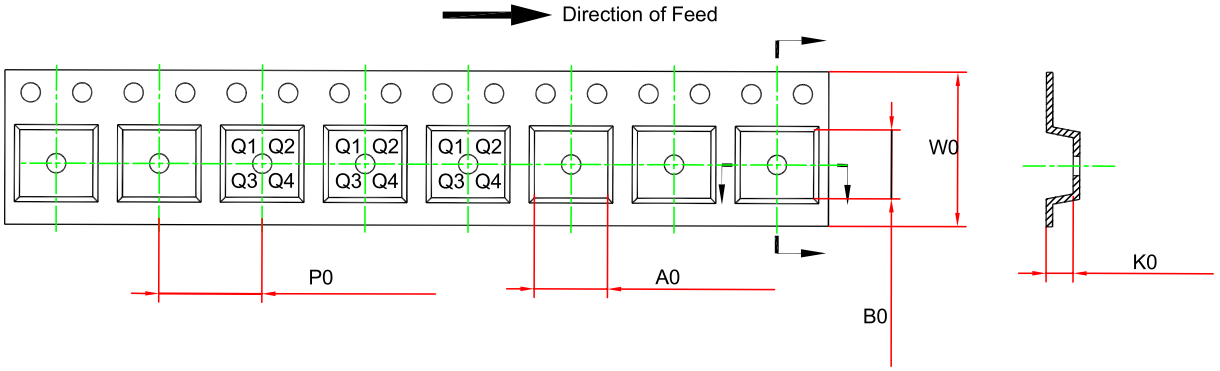

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) (1)	B0 (mm) (1)	K0 (mm) (1)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPW4052-SR	SOP16	330	21.6	6.6	10.4	2.1	8	16	Q1
TPW4052-TR	TSSOP16	330	17.6	6.8	5.5	1.5	8	12	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOP16

Package Outline Dimensions SO3(SOP-16-A)

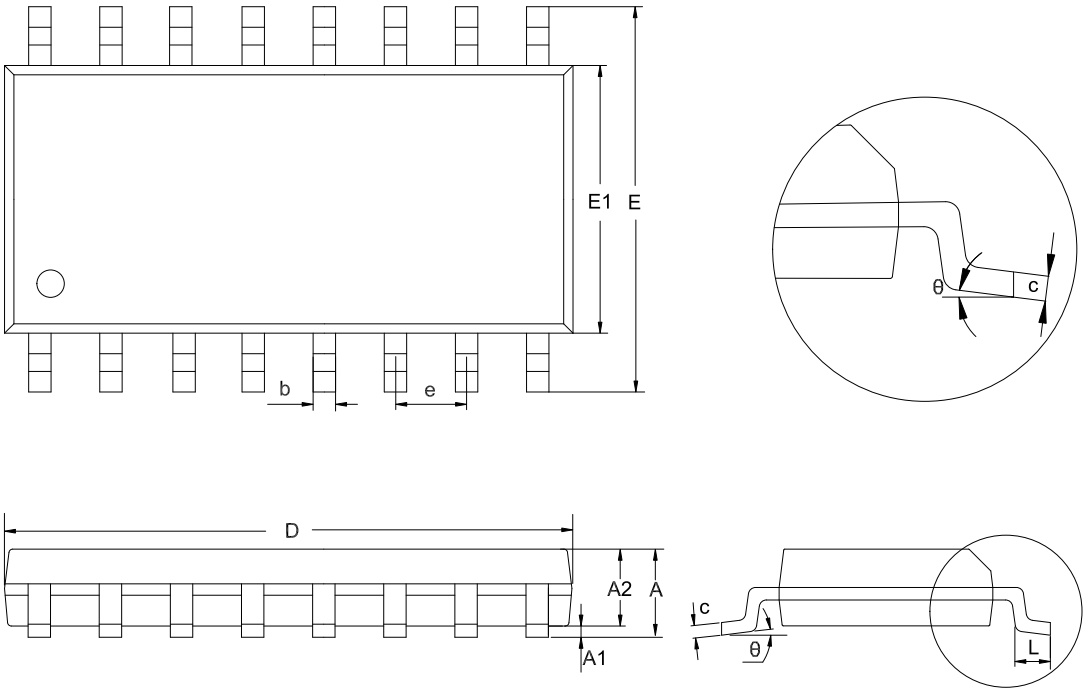

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.300	1.600	0.051	0.063
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	9.800	10.000	0.386	0.394
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

TSSOP16

Package Outline Dimensions TS3(TSSOP-16-A)

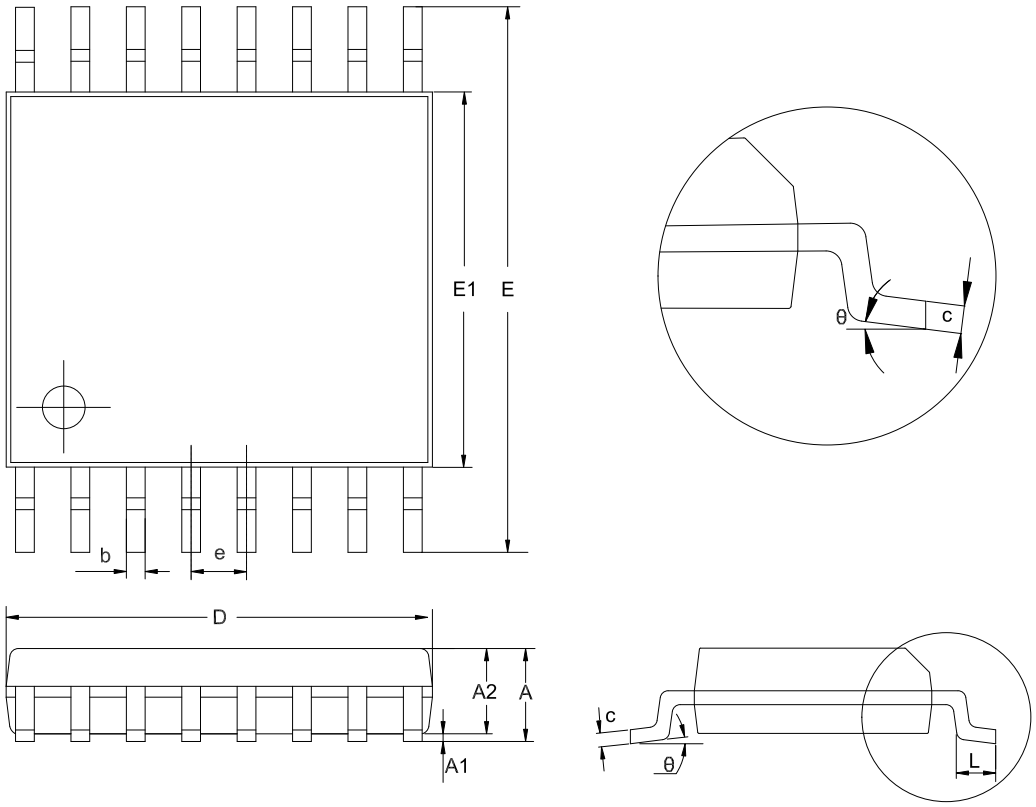

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.900	5.100	0.193	0.201
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPW4052-SR	−40 to 125°C	SOP16	W4052	3	Tape and Reel, 2500	Green
TPW4052-TR	−40 to 125°C	TSSOP16	W4052	3	Tape and Reel, 3000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank