

ZWX-715Bcc5B

5G Cellular Blade antenna

The Joymax ZWX-715Bcc5B antenna is a tilt blade-style, dipole antenna designed for 5G New Radio FR1, LTE, and Cellular IoT (LTE-M, NB-IoT) applications with wide band coverage from 450 MHz to 5850 MHz. The antenna also supports CBRS (3550 MHz to 3700MHz), Public Safety (4940 MHz to 4990 MHz), and a growing number of Cellular LTE 450 MHz band: LTE Band 31, Band 72, Band 73 solutions.

The tilt/swivel design allows the antenna to be positioned for optimum performance and reduces the potential for damage from impact compared to a fixed whip design. The antenna attaches with an SMA plug (male pin) or RP-SMA Plug (female socket) connector.



Features

- Wide bandwidth 450 MHz to 5850 MHz
- Performance at 617 MHz to 698 MHz
 - VSWR: ≤ 2.0
 - Peak Gain: 1.1 dBi
 - Efficiency: 40%
- Hinged design with detents for straight, 45 degree and 90 degree positioning
- SMA plug (male pin) or RP-SMA plug (female socket) connector

Applications

- 5G NR FR1, 4G, 3G, 2G, CBRS
- Cellular IoT: LTE-M (Cat-M1), NB-IoT
- CBRS Private Network (3550 to 3700MHz)
- C-Band applications (3700 to 4200MHz)
- Public Safety networks (4940 to 4990MHz)
- Internet of Things (IoT) devices
- Gateways / Routers

Ordering Information

Part Number	Description
ZWX-715BSA5B	5G/LTE Cellular Tilt/Swivel Blade Antenna with SMA plug (male pin) Connector
ZWX-715BR55B	5G/LTE Cellular Tilt/Swivel Blade Antenna with RP-SMA plug (female socket) Connector

Available from Joymax Electronics and select distributors and representatives.

Table 1: Electrical Specifications

ZWX-715Bcc5B	5G NR / LTE Bands (MHz)					
Frequency Range	450	617~960	1710~2690	3300~4200	4400~5000	5150~5925
VSWR (Max)	1.9	2.0	2.5	1.4	2.0	1.9
Peak Gain (dBi)	0.9	1.9	4.3	3.1	2.2	4.4
Average Gain (dBi)	-3.9	-4.0	-2.5	-2.0	-3.2	-2.0
Efficiency (%)	41	40	57	63	49	64
Polarization	Linear					
Radiation	Omni directional					
Max Power	1 W					
Wavelength	$\frac{1}{2}\lambda$					
Electrical Type	Dipole					
Impedance	50 Ω					

Electrical specifications and plots measured with the antenna hanging free in a 90 degree bent orientation without ground plane.

Table 2: Mechanical Specifications


Parameter	Value
Connection	SMA Plug (male pin) or RP-SMA Plug (female socket)
Operating Temp.	-30°C to +70°C
Weight	30 g
Dimension	183 mm (Straight) x 28 mm x 13 mm
Antenna Color	Black
Ingress Protection	N/A

Packaging Information


The ZWX-715Bcc5B antennas are individually sealed in a clear plastic bag. **Figure 1.** 300 pcs per carton, 420 mm x 310 mm x 260 mm (16.5 in x 12.2 in x 10.2 in), total weight 10.2 kgs (22.48 lb) Distribution channels may offer alternative packaging options.



1pcs antenna / 1 PE bag

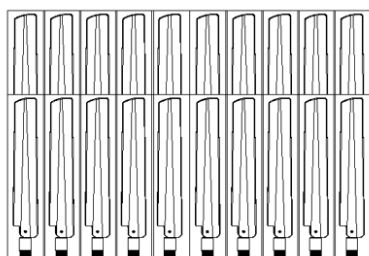

50pcs antenna / 1 Bigger PE bag

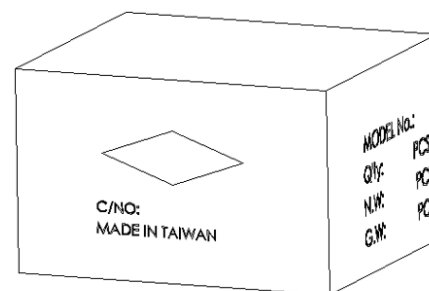

300pcs antenna / 1 Carton

Figure 1. Antenna Packaging

Product Dimensions

Figure 2 provides dimensions of the ZWX-715Bcc5B. The antenna blade can be tilted 90 degrees, and has a detent at 45 degrees enabling the antenna to be oriented in any direction. The rotating base allows for continuous positioning through 360 degrees even while installed.

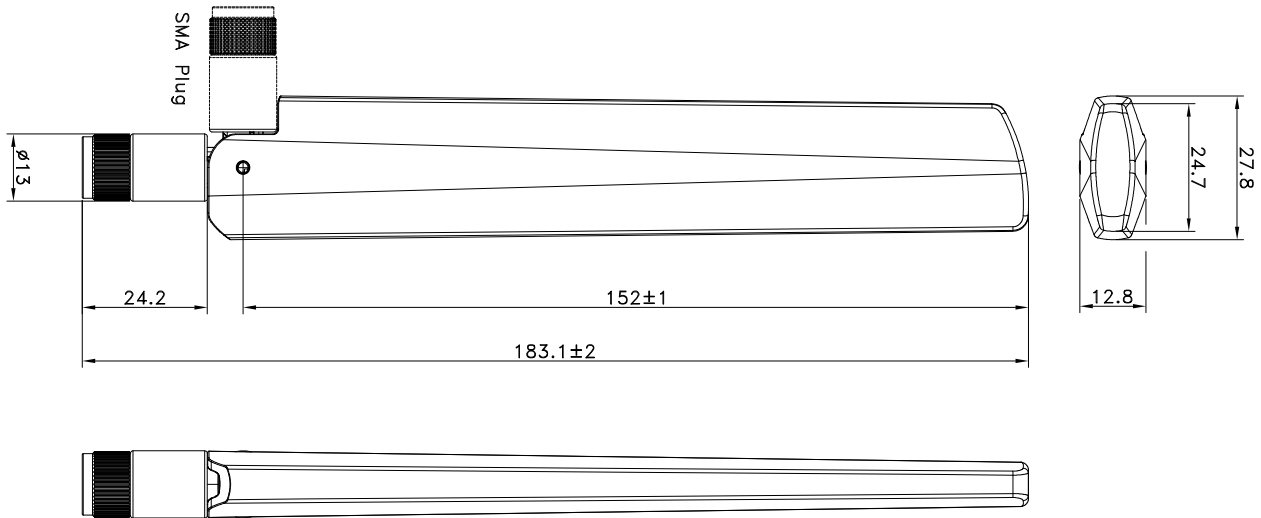


Figure 2. Antenna Dimensions

Antenna Orientation

The ZWX-715Bcc5B antenna is characterized in 90 degrees bent antenna orientations as shown in **Figure 3**. The antenna orientation characterizes use of an antenna attached to enclosure-mounted connector or VNA for testing purpose. The 90 degree bent orientations represent the most common end-product use cases. The charts on the following pages represent data taken with the antenna in free space without ground plane.



Bent 90 degrees, without ground plane

Figure 3. Antenna Test Orientation

VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR is a function of the reflection coefficient, which describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

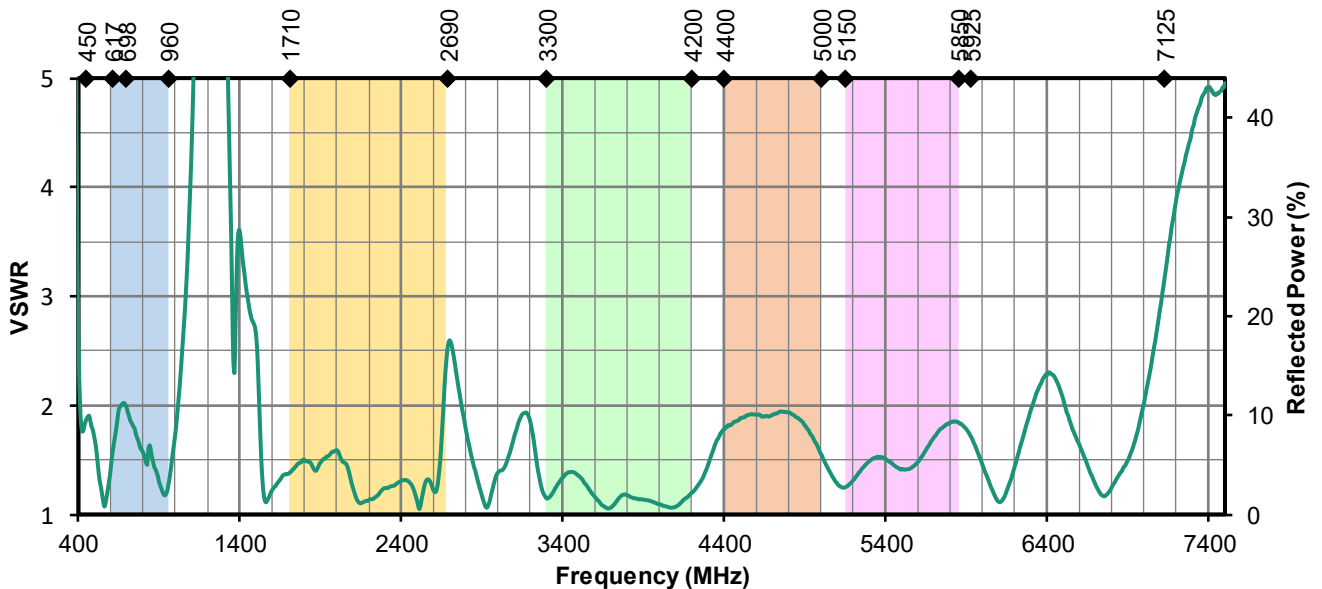


Figure 4. Antenna VSWR, Bent 90 Degrees

Return Loss

Return loss (**Figure 5**), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

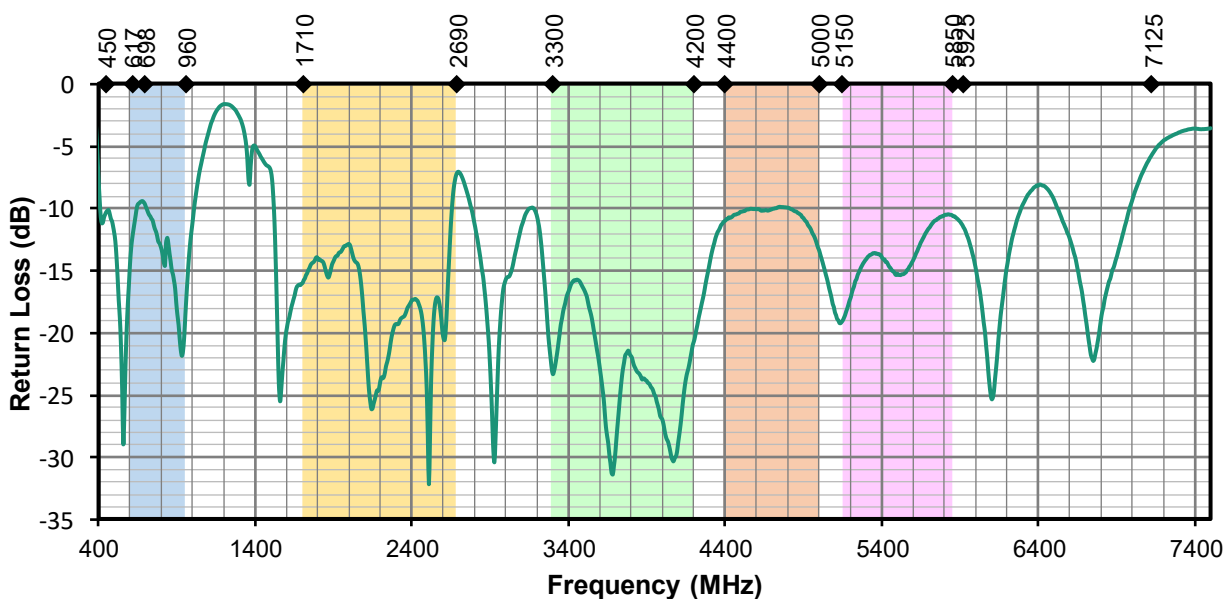


Figure 5. Antenna Return Loss, Bent 90 Degrees

Peak Gain

The peak gain across the antenna bandwidth is shown in **Figure 6**. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

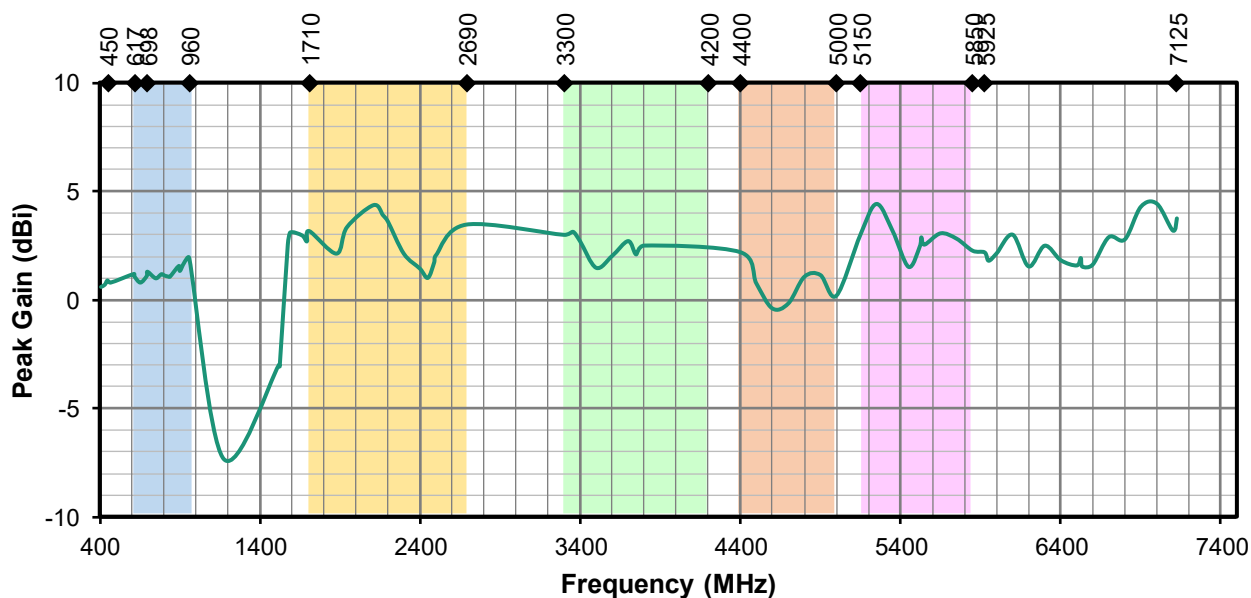


Figure 6. Antenna Peak Gain, Straight without ground plane

Average Gain

Average gain (**Figure 7**), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

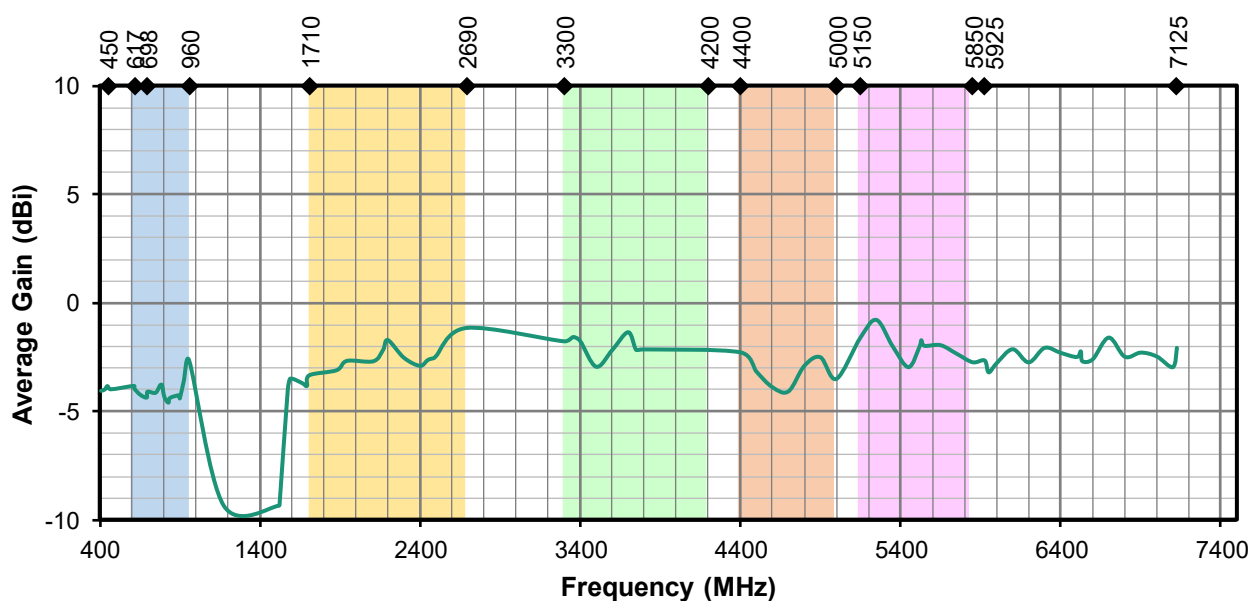


Figure 7. Antenna Average Gain, Straight without ground plane

Radiation Efficiency

Radiation efficiency (**Figure 8**), shows the ratio of power radiated by the antenna relative to the power supplied to the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency. An ideal antenna has 100% efficiency. But in really world, usually an external antenna radiates only 50~60% of power supplied to it.


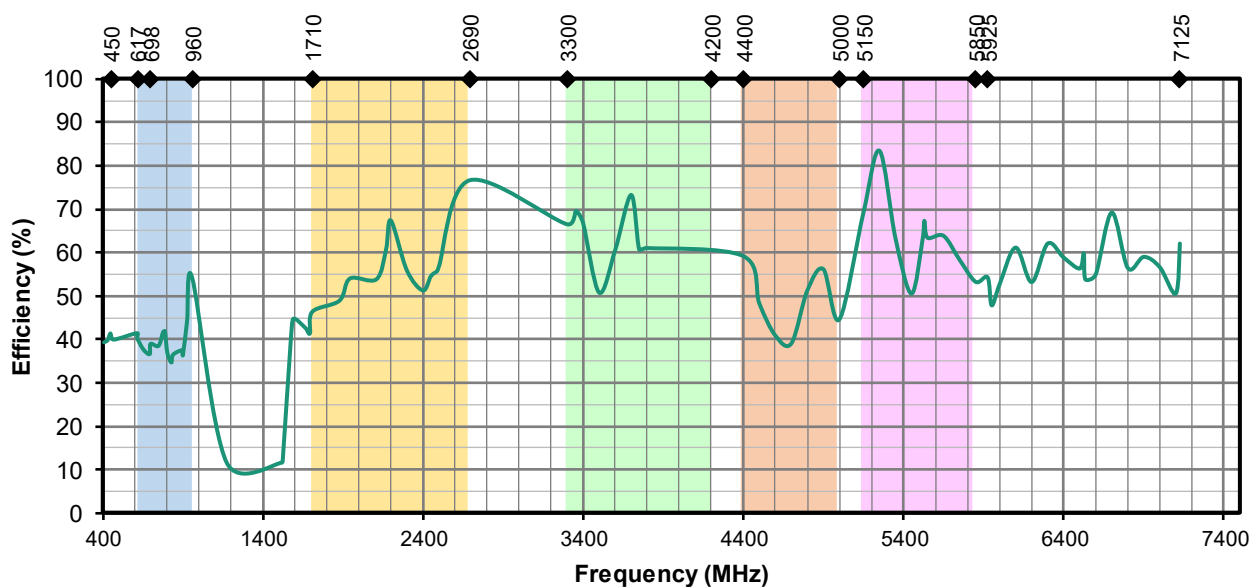



Figure 8. Antenna Efficiency, Straight without ground plane

Radiation Patterns


Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns for a straight orientation are shown in **Figure 9** using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it.

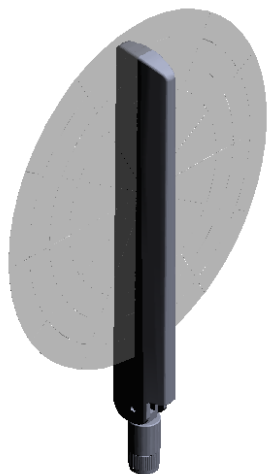

XZ-Plane Gain

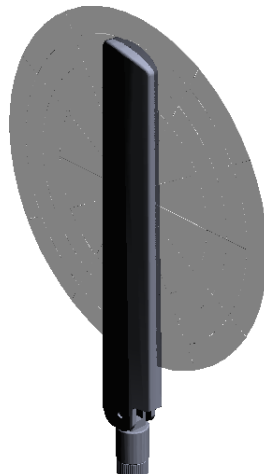


YZ-Plane Gain

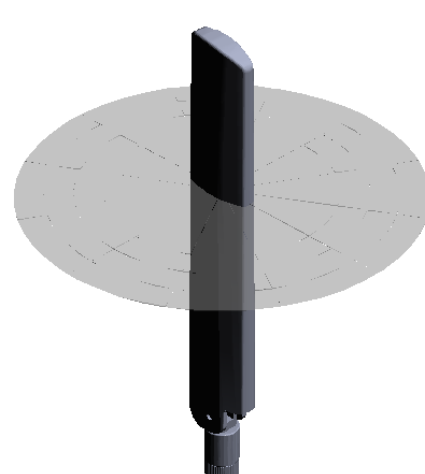


XY-Plane Gain


450 MHz

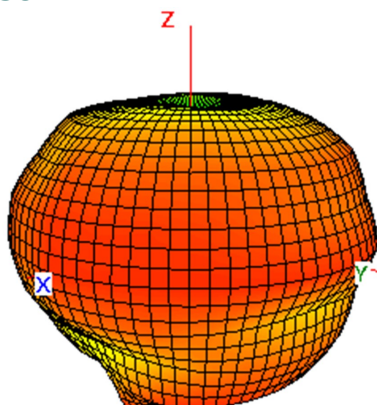


450 MHz

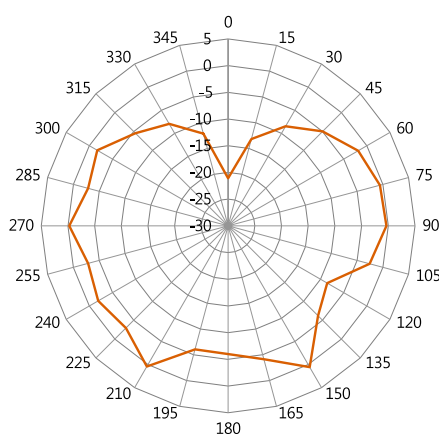

XZ-Plane Gain

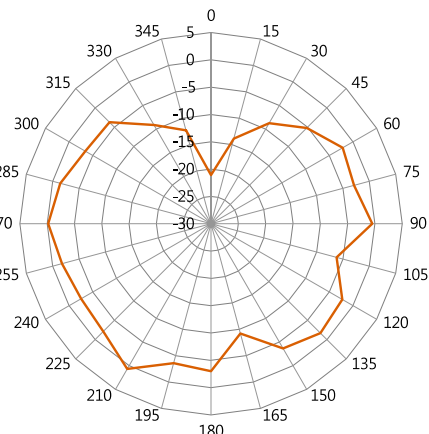


YZ-Plane Gain

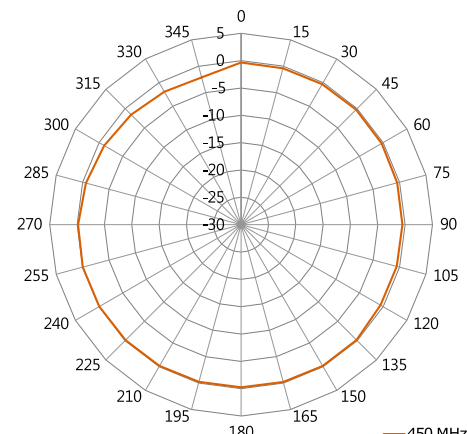


XY-Plane Gain

Figure 9. Antenna Radiation Patterns, Straight without ground plane


617 MHz to 960 MHz (778 MHz)

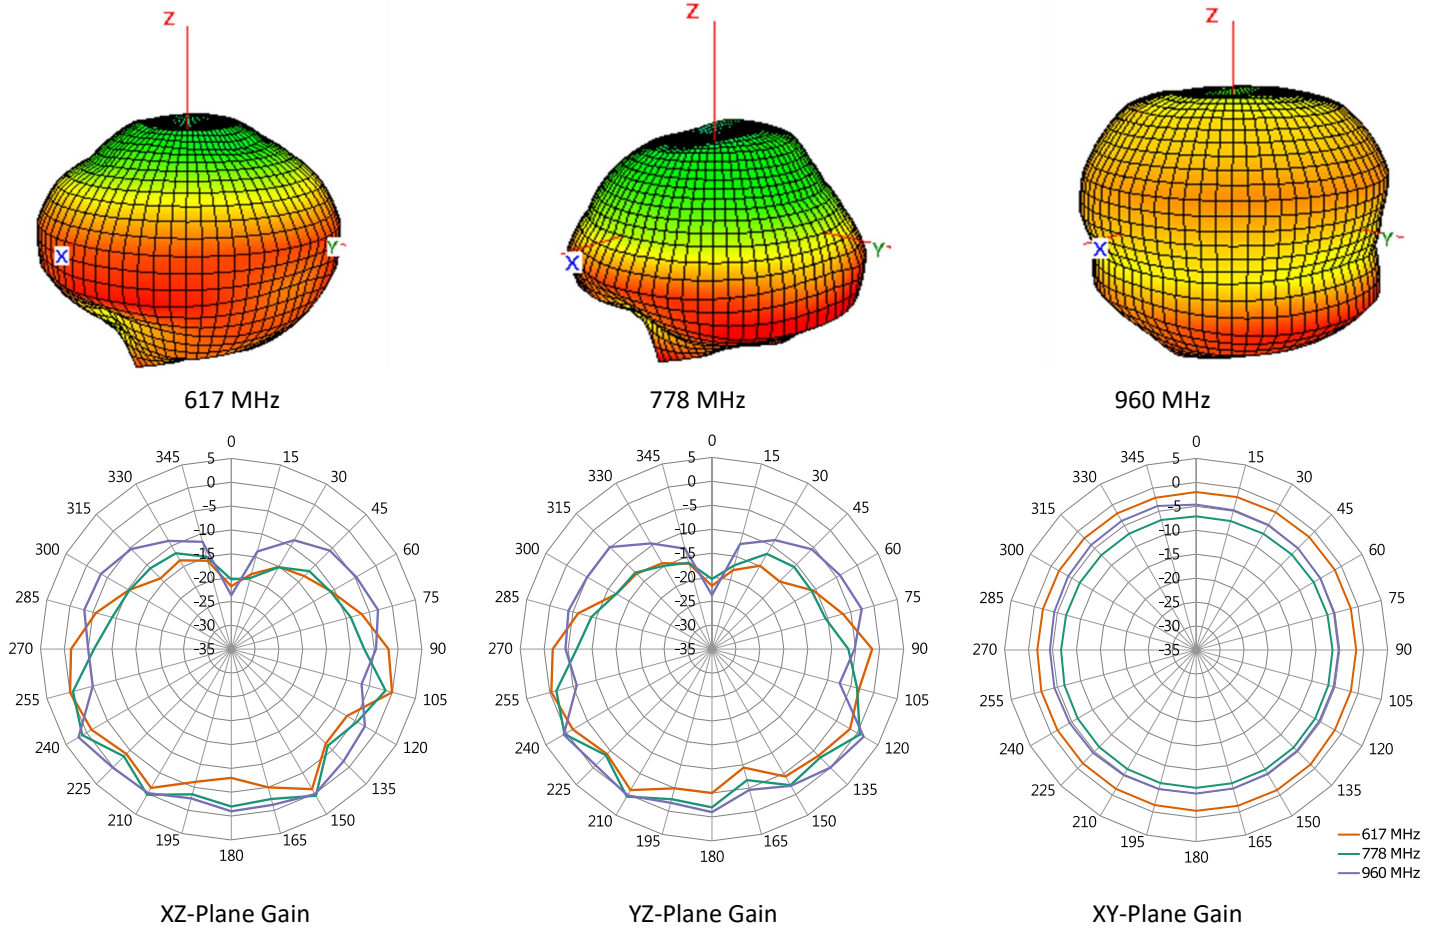


1710 MHz to 5000 MHz (3355 MHz)

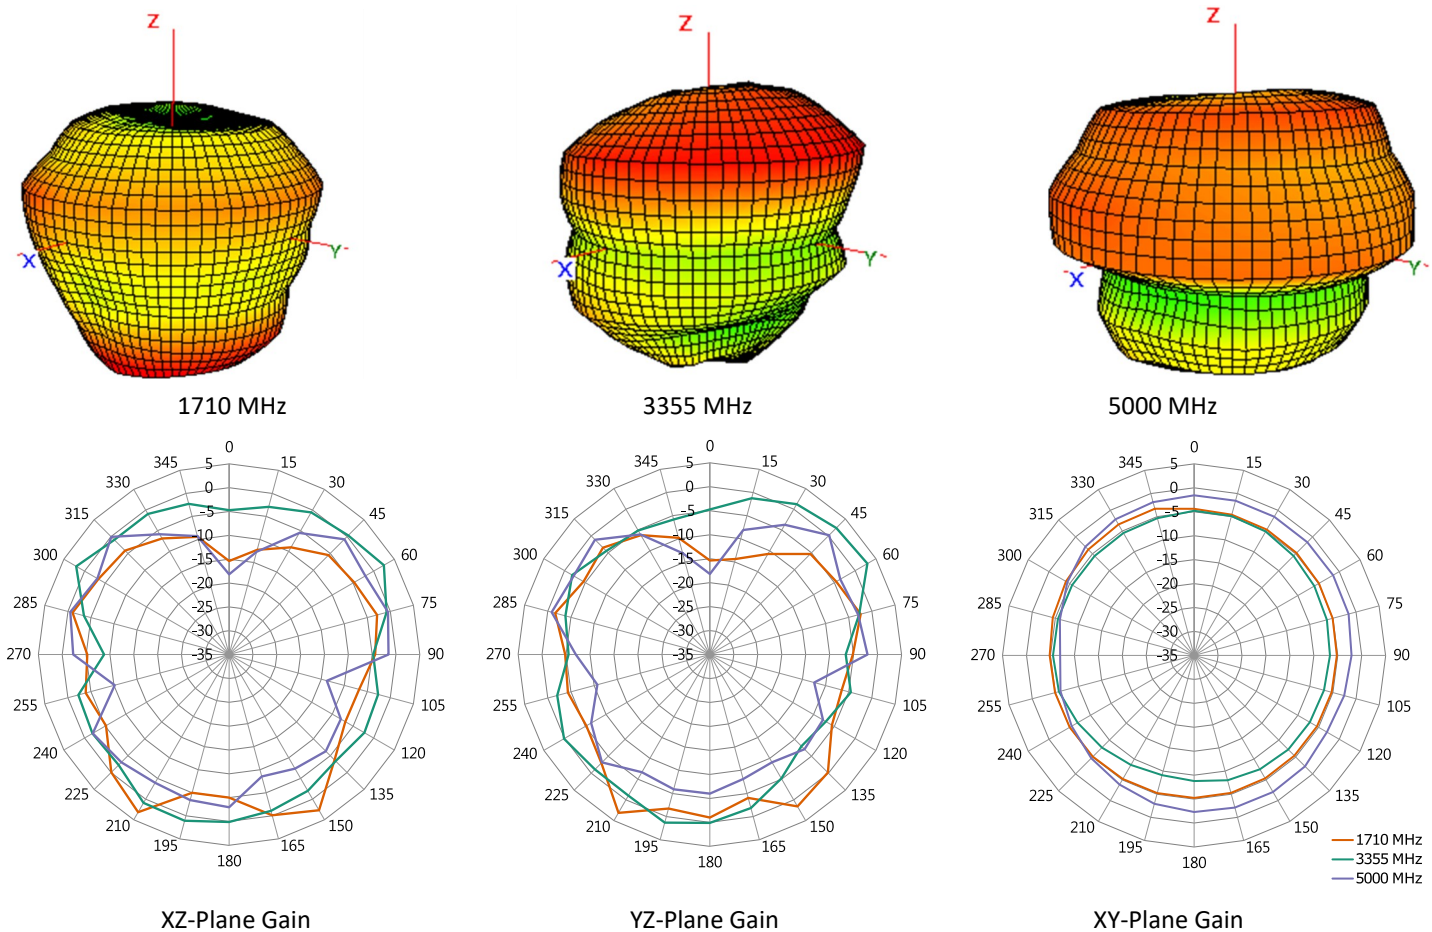


5150 MHz to 5850 MHz (5550 MHz)

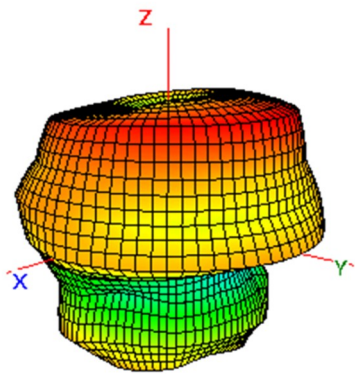


5150 MHz

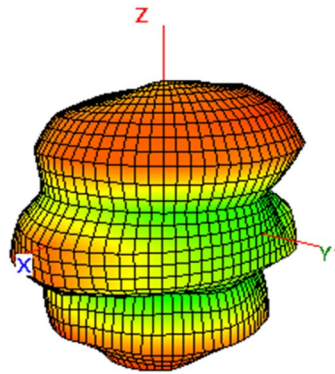


5550 MHz

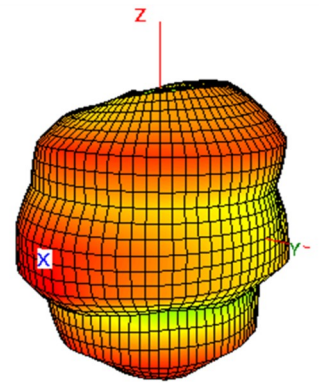


5850 MHz

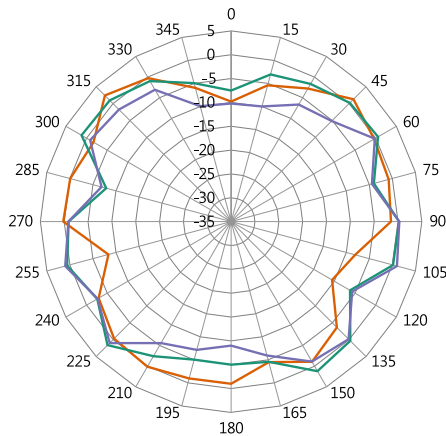

XZ-Plane Gain

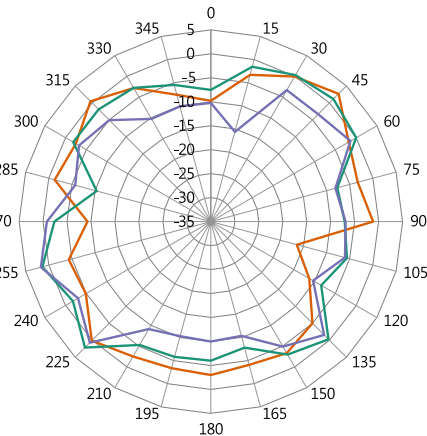


YZ-Plane Gain

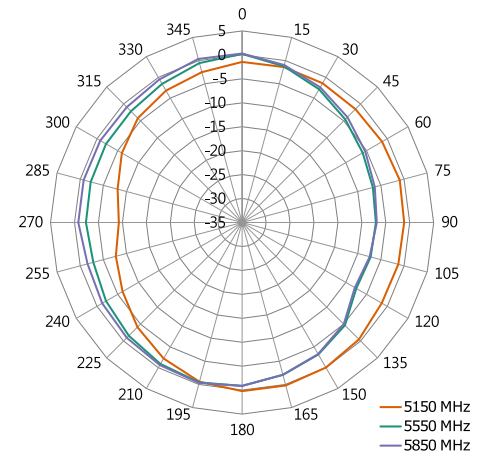


XY-Plane Gain


5925 MHz to 7125 MHz (6525 MHz)

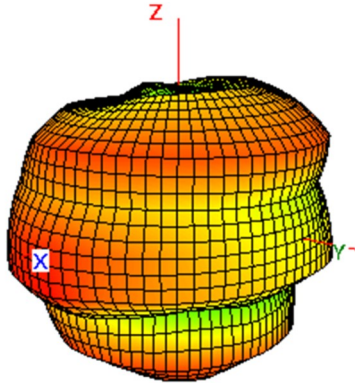


5925 MHz

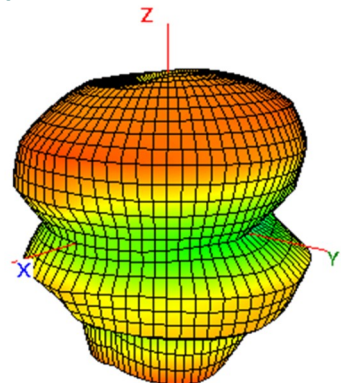


6525 MHz

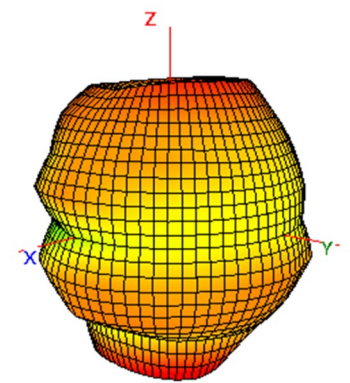


7125 MHz

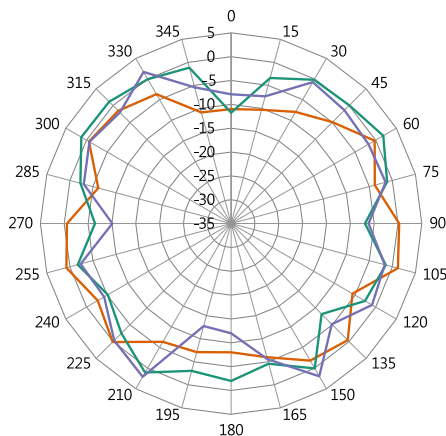

XZ-Plane Gain

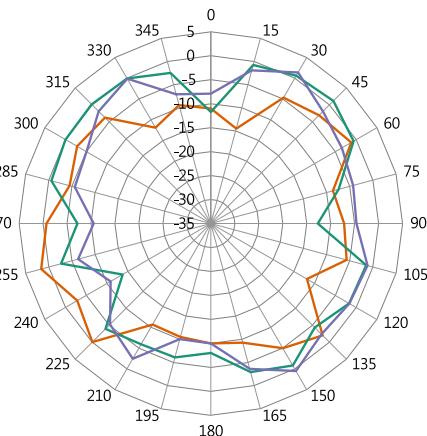

YZ-Plane Gain

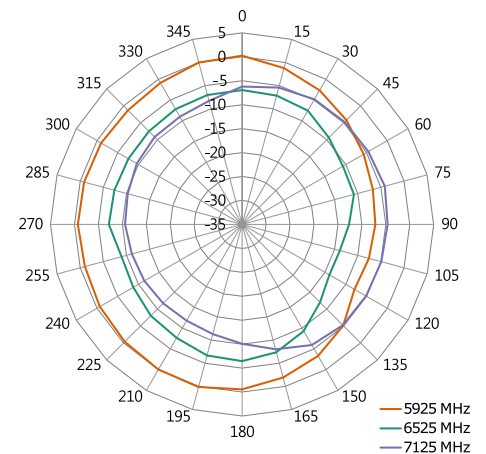

XY-Plane Gain

Antenna FAQs

Q: What is an antenna?

An antenna is used for transmission or reception of radio signals in wireless communication.

Q: How do antennas work?

Electricity flowing into the transmitter antenna makes electrons vibrate up and down it, producing radio waves. The radio waves travel through the air at the speed of light. When the waves arrive at the receiver antenna, they make electrons vibrate inside it.

Q: Does antenna size matter?

A bigger antenna, properly designed, will always have more **gain** than a smaller one. And it will be the best kind of **gain**, much better than using a small antenna and simply over-amplifying it, because a small antenna just won't pull in truly weak signals like this gigantic one will.

Q: What is the advantage of external antennas?

External antennas usually offer **better bandwidth** and **high performance** due to the nature of their larger size. This often results in a higher rated **gain** (dBi) than their internal counterparts. Due to its smaller size, an internal antenna would not function well to support lower frequencies.

Ease of integration – an external antenna requires fewer design resources and shorter time to integrate to allow for a more rapid time-to-market. An internal antenna's performance is influenced by device environment – PCB ground plane, nearby metal part, and enclosure. That would require much more effort such as impedance matching network to complete antenna design.






Q: Why is most antenna impedance 50 Ohm?

50 Ohm is an industry standard of coax cables and power amplifiers. It was chosen as a tradeoff between maximum power handling for the transmit coax and the copper losses. The optimum would have been anyway in the range of **30 to 100 ohm** with average at 50 Ohm.

Q: Why does GNSS require RHCP (Right-hand-circularly-polarized) antennas?

Satellite's signal has a low power density, especially after propagating through the **atmosphere** (**ionosphere** affect radio wave). Polarized waves oscillate in more than one direction, which deliver satellite's signal to receiver on Earth surface more effectively.

MATING COMPONENTS: RF COAXIAL CONNECTOR AND CABLE ASSEMBLY

Part Number	Image	Connector 1 (Receptacle)	Connector 2 (Plug)	Cable Length		Cable Diameter (mm)
				mm	Inch	
CX-SAS0MMPA1W0007		SMA Jack Female Socket Straight	MHF1	70	2.76	1.13
CT-SAB11X-006M		SMA Jack Female Socket Right Angle	N/A	N/A	N/A	N/A
CT-SAD12X-006M		RP-SMA Jack Male Pin Straight	N/A	N/A	N/A	N/A
CT-SAD11X-006M		RP-SMA Jack Male Pin Right Angle	N/A	N/A	N/A	N/A
CX-SAT0MFA1W0030		RP-SMA Jack Female Socket Straight	MHF4L	300	11.8	1.13

Website: <https://www.joymax.com.tw>

Offices: 5, Dong-Yuan 2nd Road, Zhong-Li Dist., Tao-Yuan City 32063 Taiwan (R.O.C.)

Phone: +886 3 433 5698

E-MAIL: info@joymax.com.tw

Joymax Electronics reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

EnJOY MAX Wireless is a registered trademark of Joymax Electronics Co., Ltd. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2023 Joymax Electronics
All Rights Reserved.

11/23 RevA