

CD74HCx4067-Q1 Automotive High-Speed CMOS Logic 16-Channel Analog Multiplexer and Demultiplexer

1 Features

- Qualified for automotive applications
- AEC-Q100 test guidance with the following results:
 - Device temperature grade 1: -40°C to 125°C ambient operating temperature range
 - Device HBM ESD Classification Level H1A
 - Device CDM ESD Classification Level C2
- Wide analog input voltage range
- Low ON resistance
 - 70Ω typical ($V_{CC} = 4.5\text{V}$)
- Fast switching and propagation speeds
- Break-before-make switching
 - 6ns typical ($V_{CC} = 4.5\text{V}$)
- Fanout (over temperature range)
 - Standard outputs: 10 LSTTL loads
 - Bus driver outputs: 15 LSTTL loads
- Balanced propagation delay and transition times
- Significant power reduction compared to LSTTL logic ICs
- 4.5V to 5.5V operation
- Direct LSTTL input logic compatibility: $V_{IL} = 0.8V$ maximum, $V_{IH} = 2V$ minimum
- CMOS input compatibility: $I_I \leq 1\mu\text{A}$ at V_{OL} , V_{OH}

2 Applications

- [Automotive](#)
- Analog switch
- Analog multiplexer and demultiplexer

3 Description

The CD74HCx4067-Q1 device is a digitally controlled analog switch that utilizes silicon-gate CMOS technology to achieve operating speeds similar to LSTTL, with the low power consumption of standard CMOS integrated circuits.


This analog multiplexer and demultiplexer controls analog voltages that may vary across the voltage supply range. It is a bidirectional switch, thus allowing any analog input to be used as an output and vice-versa. The switch has low (on) resistance and low (off) leakages. In addition, the device has an enable control that, when high, disables all switches to their off state.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
CD74HCx4067QM96Q1	DW (SOIC, 24)	15.5mm × 10.3mm
CD74HCx4067QRGYRQ1	RGY (QFN, 24)	5.5mm × 3.5mm
CD74HCx4067QDGSRQ1	DGS (VSSOP, 24)	6.1mm × 3mm
CD74HCx4067QPWRQ1	PW (TSSOP, 24)	4.4mm × 7.8mm

(1) For more information, see [Section 18](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.

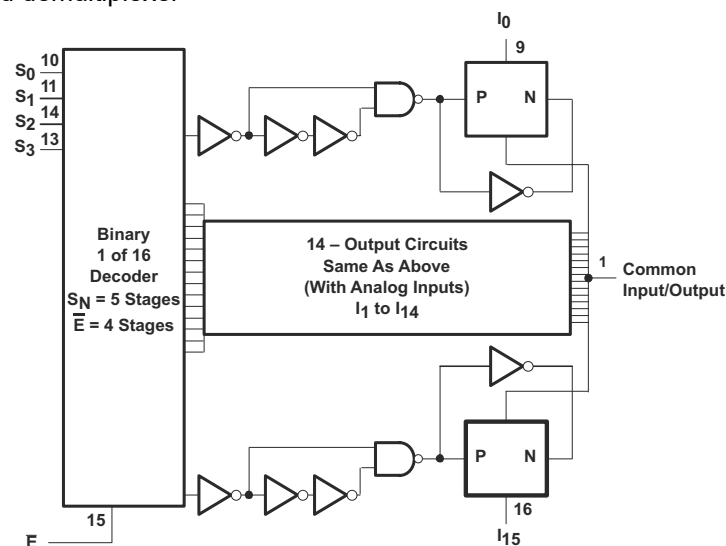

Logic Diagram (Positive Logic)



Table of Contents

1 Features	1	14 Parameter Measurement Information	12
2 Applications	1	15 Detailed Description	14
3 Description	1	15.1 Functional Block Diagram.....	14
4 Pin Configuration and Functions	3	15.2 Device Functional Modes.....	14
5 Absolute Maximum Ratings	5	16 Device and Documentation Support	15
6 ESD Ratings	5	16.1 Receiving Notification of Documentation Updates..	15
7 Thermal Information	6	16.2 Support Resources.....	15
8 Recommended Operating Conditions	6	16.3 Trademarks.....	15
9 Electrical Characteristics: HC Devices	7	16.4 Electrostatic Discharge Caution.....	15
10 Electrical Characteristics: HCT Devices	8	16.5 Glossary.....	15
11 Switching Characteristics HC	9	17 Revision History	15
12 Switching Characteristics HCT	11	18 Mechanical, Packaging, and Orderable	
13 Analog Channel Specifications	11	Information	16

4 Pin Configuration and Functions

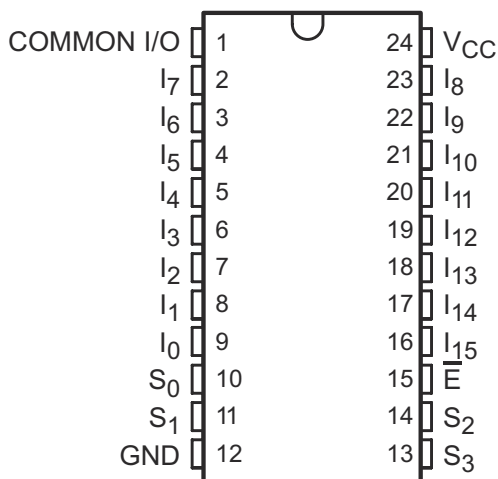
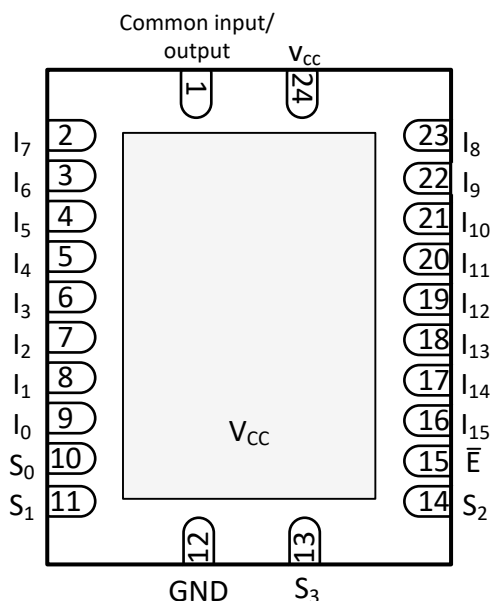


Figure 4-1. DW Package, 24-Pin SOIC (Top View)



**Figure 4-2. RGY Package, 24-Pin QFN (Top View)
(Pad on Bottom)**

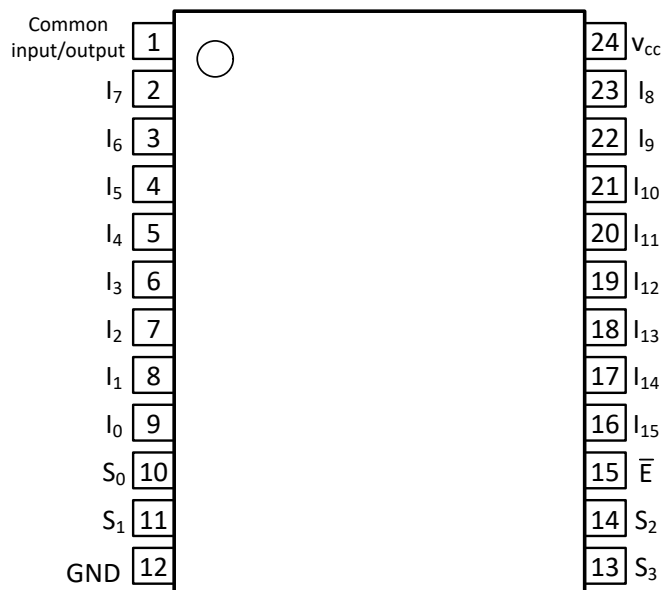


Figure 4-3. PW Package, 24-Pin TSSOP (Top View)

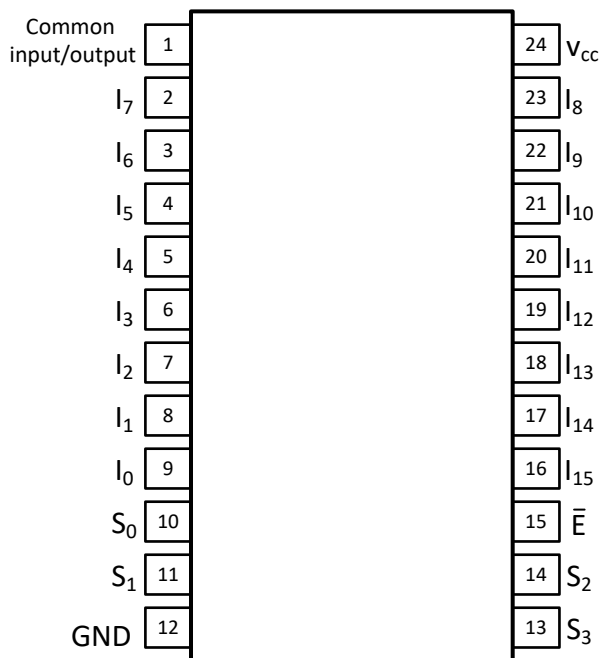


Figure 4-4. DGS Package, 24-Pin VSSOP (Top View)

CD74HCT4067-Q1, CD74HC4067-Q1

SCLS601D – DECEMBER 2004 – REVISED APRIL 2025

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	NO.		
COMMON INPUT/OUTPUT	1	IO	Common input or output.
I ₇	2	IO	Switch input/output
I ₆	3	IO	Switch input/output
I ₅	4	IO	Switch input/output
I ₄	5	IO	Switch input/output
I ₃	6	IO	Switch input/output
I ₂	7	IO	Switch input/output
I ₁	8	IO	Switch input/output
I ₀	9	IO	Switch input/output
S ₀	10	I	Select/Address pin
S ₁	11	I	Select/Address pin
GND	12	P	Ground pin
S ₃	13	I	Select/Address pin
S ₂	14	I	Select/Address pin
\bar{E}	15	I	Enable for all switches ON/OFF
I ₁₅	16	IO	Switch input/output
I ₁₄	17	IO	Switch input/output
I ₁₃	18	IO	Switch input/output
I ₁₂	19	IO	Switch input/output
I ₁₁	20	IO	Switch input/output
I ₁₀	21	IO	Switch input/output
I ₉	22	IO	Switch input/output
I ₈	23	IO	Switch input/output
V _{CC}	24	P	Power pin
Thermal Pad		-	The thermal pad is not electrically connected and can be floated, grounded or tied to V _{CC}

(1) I = input, O = output. P = power

5 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)^{(1) (2)}

			MIN	MAX	UNIT
V _{CC} HC	DC Supply voltage		-0.5	7	V
V _{CC} HCT			-0.5	7	V
I _{IK}	DC input diode current	For V _I < -0.5V or V _I > V _{CC} + 0.5V	-20	20	mA
I _{OK}	DC output diode current	For V _O < -0.5V or V _O > V _{CC} + -0.5V	-20	20	mA
I _{CC}	DC V _{CC} or ground current		-50	50	mA
DC Output Source or Sink Current per Output Pin, I _O	For V _O > -0.5V or V _O < V _{CC} + -0.5V		-25	25	mA
T _{JMAX}	Maximum junction temperature (Plastic Package)			150	°C
T _{stg}	Storage temperature		-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.

6 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002, all pins ⁽¹⁾	400	V
		Charged device model (CDM), per AEC Q100-011, all pins	250	

- (1) AEC Q100-002 indicates that HBM stressing must be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7 Thermal Information

THERMAL METRIC ⁽¹⁾		CD74HCx4067				UNIT
		DW (SOIC)	RGY (QFN)	DGS (VSSOP)	PW (TSSOP)	
		24 PINS	24 PINS	24 PINS	24 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	84.8	67.1	96.8	97.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	57.0	59.2	43.4	45.0	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	59.5	45.4	58.7	62.7	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	29.0	9.3	3.9	5.20	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	59.0	45.1	58.2	62.1	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	34.7	N/A	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

8 Recommended Operating Conditions

			MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage range (T_A = full package temperature range)	74HC types	2		6	V
V_{CC}	Supply voltage range (T_A = full package temperature range)	74HCT types	4.5		5.5	V
V_{IS}	Analog switch I/O voltage		0		V_{CC}	V
T_A	Ambient temperature	Ambient temperature	–40		125	°C
t_r, t_f	Input rise and fall times	2V	0		1000	ns
		4.5V	0		500	
		6V	0		400	

9 Electrical Characteristics: HC Devices

Over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS				MIN	TYP	MAX	UNIT
Analog Switch									
		V _{IS} (V)	V _I (V)	V _{CC} (V)	T _A				
High Level Input Voltage	V _{IH}			2	−40°C to 125°C	1.5		V	
				4.5		3.15			
				6		4.2			
Low Level Input Voltage	V _{IL}			2		0.5		V	
				4.5		1.35			
				6		1.8			
"ON" Resistance IO = 1mA	R _{ON}	V _{CC} or GND	V _{CC} or GND	4.5	25°C	70	160	Ω	
					−40°C to 125°C	200			
				6	25°C	60	140		
					−40°C to 125°C	175			
		V _{CC} to GND	V _{CC} to GND	4.5	25°C	90	180		
					−40°C to 125°C	225			
				6	25°C	80	160		
					−40°C to 125°C	200			
"ON" Resistance Between Any Two Switches	ΔR _{ON}			4.5	25°C	10	Ω		
				6	25°C	8.5			
Off-Switch Leakage Current	I _Z	E = V _{CC}	V _{CC} or GND	6	25°C	±0.8		μA	
					−40°C to 125°C	±8			
Input Leakage Current (Any Control)	I _{IL}		V _{CC} or GND ⁽¹⁾	6	25°C	±0.1		μA	
					−40°C to 125°C	±1			
Quiescent Device Current	I _{CC}		V _{CC} or GND	6	25°C	8		μA	
					−40°C to 125°C	160			

(1) Any voltage between V_{CC} and GND.

10 Electrical Characteristics: HCT Devices

Over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS				MIN	TYP	MAX	UNIT
Analog Switch									
		V _{IS} (V)	V _I (V)	V _{CC} (V)	T _A				
High Level Input Voltage	V _{IH}			4.5	25°C	2		V	
Low Level Input Voltage	V _{IL}				−40°C to 125°C	0.8		V	
"ON" Resistance IO = 1mA	R _{ON}	V _{CC} or GND	V _{CC} or GND	4.5	25°C	70	160	Ω	
					−40°C to 125°C	200			
		VCC to GND	VCC to GND		25°C	90	180		
					−40°C to 125°C	225			
"ON" Resistance Between Any Two Switches	ΔR _{ON}			4.5	25°C	10		Ω	
Off-Switch Leakage Current	I _Z	E̅ = V _{CC}	V _{CC} or GND	5.5	25°C	±0.8		μA	
					−40°C to 125°C	±8			
Input Leakage Current (Any Control)	I _{IL}		V _{CC} or GND	5.5	25°C	±0.1		μA	
					−40°C to 125°C	±1			
Quiescent Device Current	I _{CC}		V _{CC} or GND	5.5	25°C	8		μA	
					−40°C to 125°C	80			
Additional Quiescent Device Current Per Input Pin: 1 Unit Load	ΔI _{CC} (1)		V _{CC} - 2.1	4.5 to 5.5	25°C	100	360	μA	
					−40°C to 125°C	450			
C _I	Control inputs				25°C	10		pF	
					−55°C to 85°C	10			
					−55°C to 125°C	10			

(1) For dual-supply systems theoretical worst case ($V_I = 2.4\text{V}$, $V_{CC} = 5.5\text{V}$) specification is 1.8mA

11 Switching Characteristics HC

over operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions		C _L (pF)	MIN	NOM	MAX	UNIT
	FROM (INPUT) TO (OUTPUT)	V _{CC} (V)	T _A					
t _{pd}	I _n TO Common I/O	2	25°C	50			75	ns
			-40°C to 125°C				110	
		4.5	25°C				15	ns
			-40°C to 125°C				22	
		6	25°C				13	ns
			-40°C to 125°C				19	
		5	25°C	15		6		ns
t _{en}	\bar{E} TO Common I/O	2	25°C	50			275	ns
			-40°C to 125°C				415	
		4.5	25°C				55	ns
			-40°C to 125°C				83	
		6	25°C				47	ns
			-40°C to 125°C				71	
		5	25°C	15		23		ns
t _{en}	S _n TO Common I/O	2	25°C	50			300	ns
			-40°C to 125°C				450	
		4.5	25°C				60	ns
			-40°C to 125°C				90	
		6	25°C				51	ns
			-40°C to 125°C				76	
		5	25°C	15		25		ns
t _{dis}	\bar{E} TO Common I/O	2	25°C	50			275	ns
			-40°C to 125°C				415	
		4.5	25°C				55	ns
			-40°C to 125°C				83	
		6	25°C				47	ns
			-40°C to 125°C				71	
		5	25°C	15		23		ns
t _{dis}	S _n TO Common I/O	2	25°C	50			290	ns
			-40°C to 125°C				435	
		4.5	25°C				58	ns
			-40°C to 125°C				87	
		6	25°C				49	ns
			-40°C to 125°C				74	
		5	25°C	15		21		ns

over operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions		C _L (pF)	MIN	NOM	MAX	UNIT
C _{PD} Power dissipation capacitance(1)	C _{PD}	5	25°C			93		pF

12 Switching Characteristics HCT

over operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions		C _L (pF)	MIN	NOM	MAX	UNIT
	FROM (INPUT) TO (OUTPUT)	V _{CC} (V)	T _A					
t _{pd}	I _n TO Common I/O	5	25°C	15		6		ns
		4.5	25°C	50			15	
			-40°C to 125°C				19	
t _{en}	\bar{E} TO Common I/O	5	25°C	15		25		ns
		4.5	25°C	50			60	
			-40°C to 125°C				75	
t _{en}	S _n TO Common I/O	5	25°C	15		25		ns
		4.5	25°C	50			60	
			-40°C to 125°C				75	
t _{dis}	\bar{E} TO Common I/O	5	25°C	15		23		ns
		4.5	25°C	50			55	
			-40°C to 125°C				69	
t _{dis}	S _n TO Common I/O	5	25°C	15		21		ns
		4.5	25°C	50			58	
			-40°C to 125°C				73	
C _{PD} Power dissipation capacitance(1)	C _{PD}	5	25°C			96		pF

13 Analog Channel Specifications

over operating free-air temperature range (unless otherwise noted)

Parameter	Test Conditions		V _{CC} (V)	HC	HCT	UNIT
Switch Frequency Response Bandwidth at -3dB			4.5	89	89	MHz
Total Harmonic Distortion	1kHz, V _{IS} = 4V _{PP}		4.5	0.051	0.051	%
Switch "OFF" signal feedthrough			4.5	-75	-75	dB
C _S Switch input capacitance				5	5	pF
C _{COM} Common Capacitance				50	50	pF

14 Parameter Measurement Information


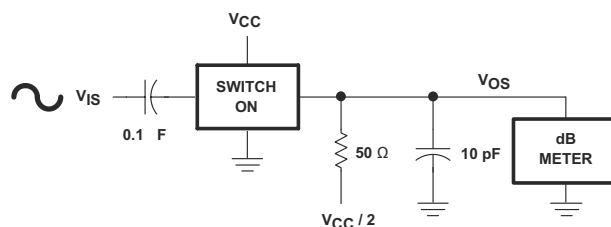


Figure 14-1. Frequency-Response Test Circuit

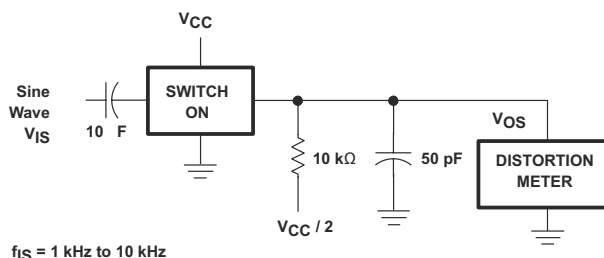

$f_{IS} = 1 \text{ kHz to } 10 \text{ kHz}$

Figure 14-2. Sine-Wave Distortion Test Circuit



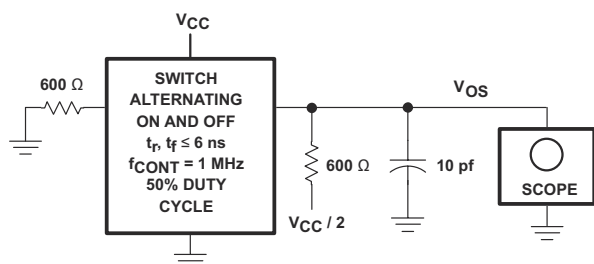


Figure 14-3. Control-to-Switch Feedthrough Noise Test Circuit


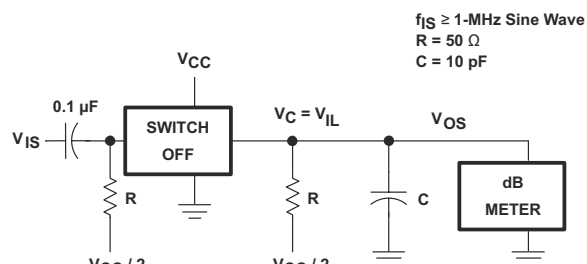


$f_{IS} \geq 1\text{-MHz Sine Wave}$
 $R = 50 \text{ } \Omega$
 $C = 10 \text{ pF}$

Figure 14-4. Switch OFF Signal Feedthrough Test Circuit

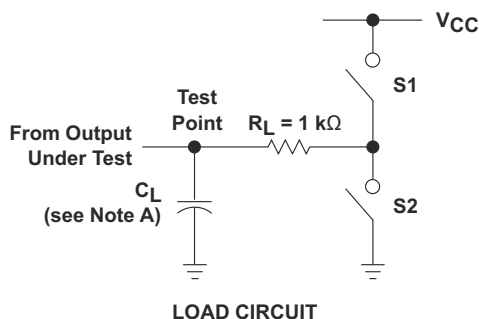

PARAMETER	S1	S2
t_{en}	t_{PZH} Open	Closed
	t_{PZL} Closed	Open
t_{dis}	t_{PHZ} Open	Closed
	t_{PLZ} Closed	Open
t_{pd}	Open	Open

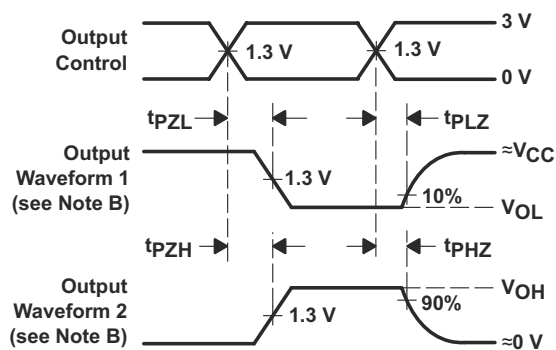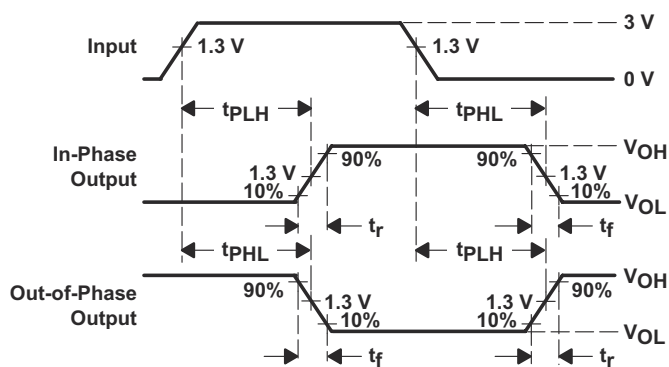

- NOTES:
- A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1$ MHz, $Z_O = 50 \Omega$, $t_r = 6$ ns, $t_f = 6$ ns.
 - D. For clock inputs, f_{max} is measured with the input duty cycle at 50%.
 - E. The outputs are measured one at a time, with one input transition per measurement.
 - F. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 - G. t_{PZL} and t_{PZH} are the same as t_{en} .
 - H. t_{PLH} and t_{PHL} are the same as t_{pd} .

Figure 14-5. Load Circuit and Voltage Waveforms

15 Detailed Description

15.1 Functional Block Diagram

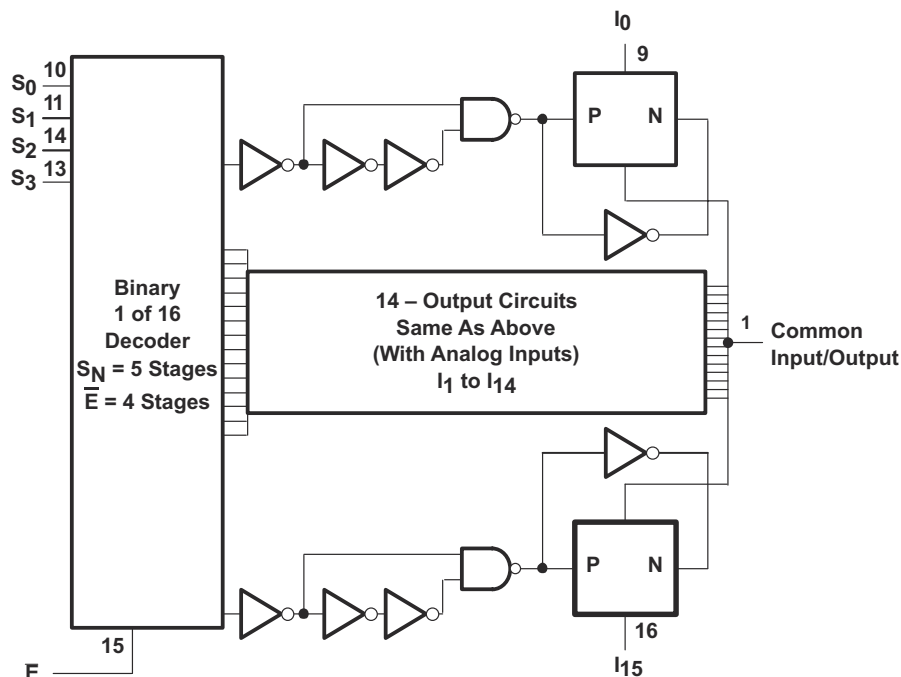


Figure 15-1. Logic Diagram (Positive Logic)

15.2 Device Functional Modes

Table 15-1. Function Table ⁽¹⁾

S0	S1	S2	S3	\bar{E}	SELECTED CHANNEL
X	X	X	X	H	None
L	L	L	L	L	0
H	L	L	L	L	1
L	H	L	L	L	2
H	H	L	L	L	3
L	L	H	L	L	4
H	L	H	L	L	5
L	H	H	L	L	6
H	H	H	L	L	7
L	L	L	H	L	8
H	L	L	H	L	9
L	H	L	H	L	10
H	H	L	H	L	11
L	L	H	H	L	12
H	L	H	H	L	13
L	H	H	H	L	14
H	H	H	H	L	15

(1) H = High level
L = Low level
X = Don't Care

16 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

16.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

16.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

16.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

16.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

16.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

17 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision C (February 2025) to Revision D (April 2025)	Page
• Added CD74HC4067-Q1.....	1

Changes from Revision B (April 2008) to Revision C (February 2025)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Updated Thermal parameters for DW package.....	6
• Added RGY, DGS, and PW packages.....	6
• Added HC Electrical characteristics.....	7
• Added HC Switching characteristics.....	9

Changes from Revision A (April 2008) to Revision B (August 2012)	Page
• Changed H2 to H1A and C3B to C2 throughout document.....	1
• Added AEC-Q100 info to Features.....	1
• Removed from Features: Wide Operating Temperature Range: –40°C to 85°C.....	1
• Added applications.....	1
• Replaced SOIC-M package info in ordering info table with new row for DW-SOIC-M package.....	1

18 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CD74HC4067QPWRQ1	ACTIVE	TSSOP	PW	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC4067Q	Samples
CD74HCT4067QM96Q1	ACTIVE	SOIC	DW	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HCT4067I	Samples
CD74HCT4067QPWRQ1	ACTIVE	TSSOP	PW	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HCT4067Q	Samples
D24067IM96G4Q1	OBSOLETE	SOIC	DW	24		TBD	Call TI	Call TI	-40 to 85	HCT4067I	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD74HC4067-Q1, CD74HCT4067-Q1 :

- Catalog : [CD74HC4067](#), [CD74HCT4067](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HC4067QPWRQ1	TSSOP	PW	24	2000	330.0	16.4	6.95	8.3	1.6	8.0	16.0	Q1
CD74HCT4067QM96Q1	SOIC	DW	24	2000	330.0	24.4	10.75	15.7	2.7	12.0	24.0	Q1
CD74HCT4067QPWRQ1	TSSOP	PW	24	2000	330.0	16.4	6.95	8.3	1.6	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74HC4067QPWRQ1	TSSOP	PW	24	2000	356.0	356.0	35.0
CD74HCT4067QM96Q1	SOIC	DW	24	2000	350.0	350.0	43.0
CD74HCT4067QPWRQ1	TSSOP	PW	24	2000	356.0	356.0	35.0



TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.


PW0024A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

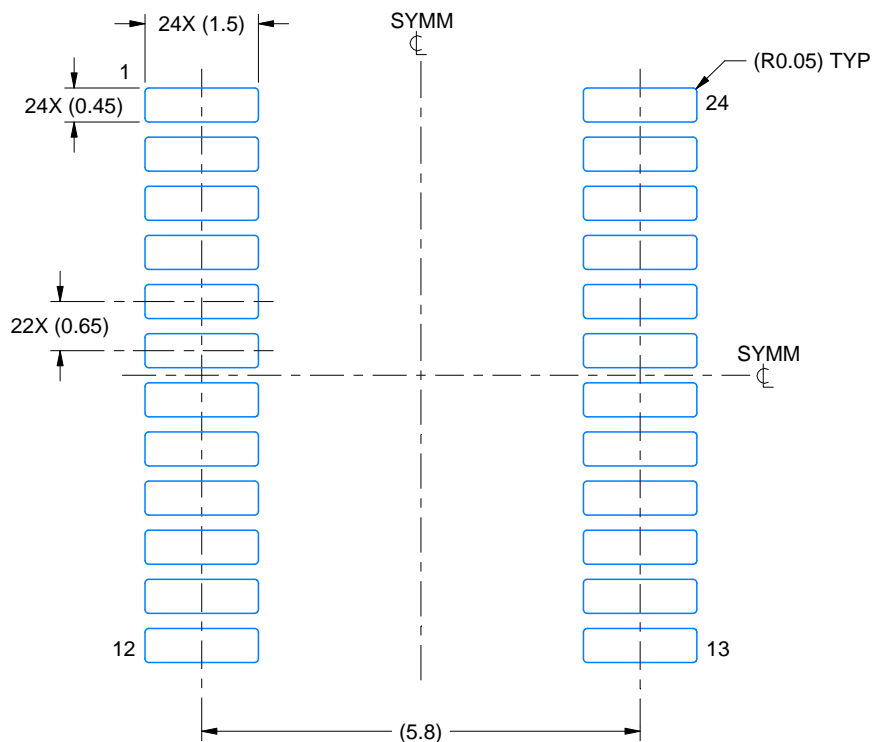

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

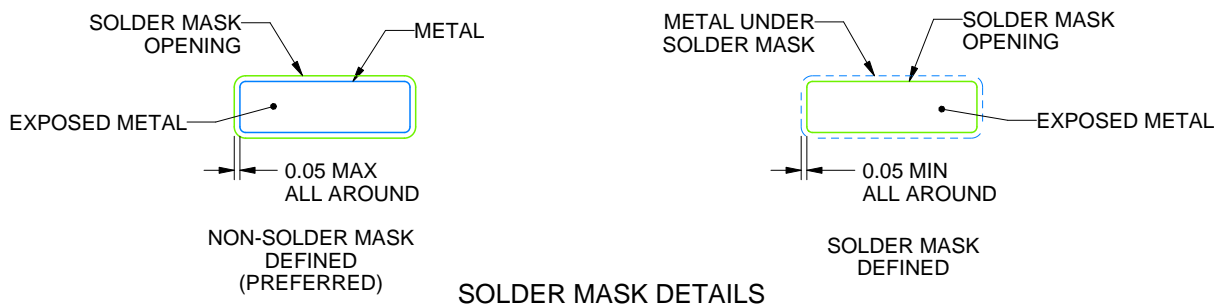

4220208/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0024A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X


4220208/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DW (R-PDSO-G24)

PLASTIC SMALL OUTLINE

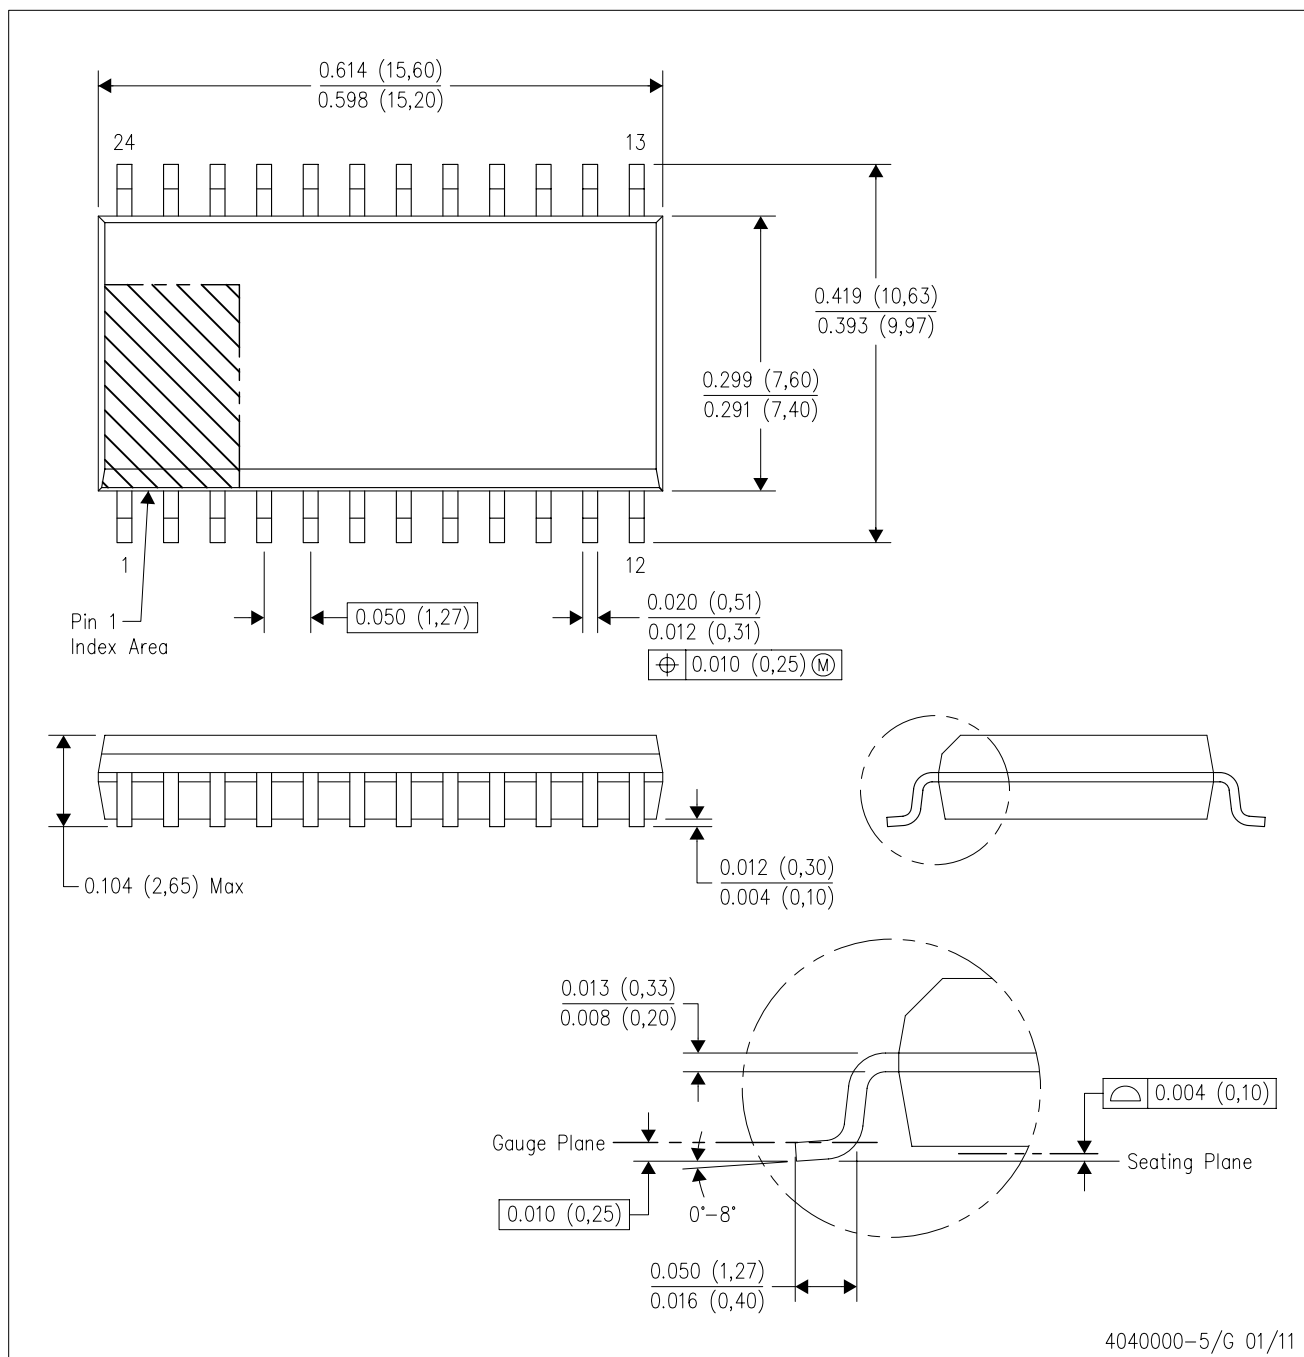

- NOTES:
- A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
 - D. Falls within JEDEC MS-013 variation AD.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated