


### Rail-to-rail 1.8 V high-speed comparator



SC70-5



SOT23-5

### Features

- Propagation delay: 38 ns
- Low current consumption: 73  $\mu$ A
- Rail-to-rail inputs
- Push-pull outputs
- Supply operation from 1.8 to 5 V
- Wide temperature range: -40 °C to 125 °C
- High ESD tolerance: 5 kV HBM, 300 V MM
- SMD packages
- Automotive qualification

### Applications

- Telecom
- Instrumentation
- Signal conditioning
- High-speed sampling systems
- Portable communication systems

### Description

The **TS3021**, **TS3021A** single comparator features high-speed response time with rail-to-rail inputs. With a supply voltage specified from 2 to 5 V, this comparator can operate over a wide temperature range: -40 °C to 125 °C.

The **TS3021**, **TS3021A** comparator offers micropower consumption as low as a few tens of microamperes thus providing an excellent ratio of power consumption current versus response time.

The **TS3021**, **TS3021A** includes push-pull outputs and is available in small packages (SOT23-5 and SC70-5).

#### Maturity status link

[TS3021, TS3021A](#)

#### Related products

[TS3022](#)


For a dual comparator with similar performances

[TS3011](#)

For a high-speed comparator


# 1 Pin configuration

**Figure 1. Pin connection (top view)**



**SC70-5**

Dot or letter K denotes pin 1 position



**SOT23-5**

Dot or letter K denotes pin 1 position

**Table 1. Pin description**

| Pin n° | pin name          | Description             |
|--------|-------------------|-------------------------|
| 1      | OUT               | Output                  |
| 2      | V <sub>CC</sub> - | Negative supply voltage |
| 3      | IN+               | Positive input voltage  |
| 4      | IN-               | Negative input voltage  |
| 5      | V <sub>CC</sub> + | Positive supply voltage |

## 2 Absolute maximum ratings and operating conditions

**Table 2. Absolute maximum ratings (AMR)**

| Symbol     | Parameter                                              |         | Value                                  | Unit |
|------------|--------------------------------------------------------|---------|----------------------------------------|------|
| $V_{CC}$   | Supply voltage, $V_{CC} = (V_{CC+}) - (V_{CC-})^{(1)}$ |         | 5.5                                    | V    |
| $V_{ID}$   | Differential input voltage <sup>(2)</sup>              |         | ±5                                     |      |
| $V_{IN}$   | Input voltage range                                    |         | $(V_{CC-}) - 0.3$ to $(V_{CC+}) + 0.3$ |      |
| $R_{thja}$ | Thermal resistance junction-to-ambient <sup>(3)</sup>  | SOT23-5 | 250                                    | °C/W |
|            |                                                        | SC70-5  | 205                                    |      |
| $R_{thjc}$ | Thermal resistance junction-to-case <sup>(3)</sup>     | SOT23-5 | 81                                     |      |
|            |                                                        | SC70-5  | 172                                    |      |
| $T_{stg}$  | Storage temperature                                    |         | -65 to 150                             | °C   |
| $T_j$      | Junction temperature                                   |         | 150                                    |      |
| $T_{LEAD}$ | Lead temperature (soldering 10 s)                      |         | 260                                    |      |
| ESD        | HBM: human body model <sup>(4)</sup>                   |         | 5000                                   | V    |
|            | MM: machine model <sup>(5)</sup>                       |         | 300                                    |      |
|            | CDM: charged device model <sup>(6)</sup>               |         | 1500                                   |      |

1. All voltage values, except the differential voltage are referenced to  $(V_{CC-})$
2. The magnitude of the input and output voltages must never exceed the supply rail  $\pm 0.3$  V
3. Short circuits can cause excessive heating. These values are typical
4. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 k $\Omega$  resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
5. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5  $\Omega$ ). This is done for all couples of connected pin combinations while the other pins are floating.
6. Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to the ground through only one pin. This is done for all pins.

**Table 3. Operating conditions**

| Symbol     | Parameter                       |                        | Value                                  | Unit |
|------------|---------------------------------|------------------------|----------------------------------------|------|
| $V_{CC}$   | Supply voltage                  | 0 °C < Tamb < 125 °C   | 1.8 to 5                               | V    |
|            |                                 | -40 °C < Tamb < 125 °C | 2 to 5                                 |      |
| $V_{icm}$  | Common mode input voltage range | -40 °C < Tamb < 85 °C  | $(V_{CC-}) - 0.2$ to $(V_{CC+}) + 0.2$ |      |
|            |                                 | 85 °C < Tamb < 125 °C  | $(V_{CC-})$ to $(V_{CC+})$             |      |
| $T_{oper}$ | Operating temperature range     |                        | -40 to 125                             | °C   |

### 3 Electrical characteristics

**Table 4. Electrical characteristics at  $V_{CC} = 2\text{ V}$ ,  $T_{amb} = 25\text{ °C}$ , and full  $V_{icm}$  range (unless otherwise specified)**

| Symbol                   | Parameter                                                  | Test conditions <sup>(1)</sup>                                                               | Min. | Typ. | Max. | Unit                    |
|--------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------|------|------|------|-------------------------|
| $V_{IO}$                 | Input offset voltage                                       | TS3021A                                                                                      |      | 0.5  | 2    | mV                      |
|                          |                                                            | TS3021                                                                                       |      | 0.5  | 6    |                         |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C, TS3021A                                                         |      |      | 4    |                         |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C, TS3021                                                          |      |      | 7    |                         |
| $\Delta V_{IO}/\Delta T$ | Input offset voltage drift                                 | -40 °C < $T_{amb}$ < 125 °C                                                                  |      | 3    | 20   | $\mu\text{V}/\text{°C}$ |
| $I_{IO}$                 | Input offset current <sup>(2)</sup>                        | $T_{amb}$                                                                                    |      | 1    | 20   | nA                      |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C                                                                  |      |      | 100  |                         |
| $I_{IB}$                 | Input bias current <sup>(2)</sup>                          | $T_{amb}$                                                                                    |      | 86   | 160  | nA                      |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C                                                                  |      |      | 300  |                         |
| $I_{CC}$                 | Supply current                                             | No load, output high, $V_{icm} = 0\text{ V}$                                                 |      | 73   | 90   | $\mu\text{A}$           |
|                          |                                                            | No load, output high, $V_{icm} = 0\text{ V}$ ,<br>-40 °C < $T_{amb}$ < 125 °C                |      |      | 115  |                         |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$                                                  |      | 84   | 105  |                         |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$ ,<br>-40 °C < $T_{amb}$ < 125 °C                 |      |      | 125  |                         |
| $I_{SC}$                 | Short-circuit current                                      | Source                                                                                       |      | 9    |      | mA                      |
|                          |                                                            | Sink                                                                                         |      | 10   |      |                         |
| $V_{OH}$                 | Output voltage high                                        | $I_{source} = 1\text{ mA}$                                                                   | 1.88 | 1.92 |      | V                       |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C                                                                  | 1.80 |      |      |                         |
| $V_{OL}$                 | Output voltage low                                         | $I_{sink} = 1\text{ mA}$                                                                     |      | 60   | 100  | mV                      |
|                          |                                                            | -40 °C < $T_{amb}$ < 125 °C                                                                  |      |      | 150  |                         |
| CMRR                     | Common mode rejection ratio                                | 0 < $V_{icm}$ < 2 V                                                                          |      | 67   |      | dB                      |
| SVR                      | Supply voltage rejection                                   | $\Delta V_{CC} = 2\text{ to }5\text{ V}$                                                     | 58   | 73   |      |                         |
| $TP_{LH}$                | Propagation delay, low to high output level <sup>(3)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV   |      | 38   | 60   | ns                      |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV    |      | 48   | 75   |                         |
| $TP_{HL}$                | Propagation delay, high to low output level <sup>(4)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV   |      | 40   | 60   |                         |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV    |      | 49   | 75   |                         |
| $T_F$                    | Fall time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV |      | 8    |      |                         |
| $T_R$                    | Rise time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV |      | 9    |      |                         |

1. All values over the temperature range are guaranteed through correlation and simulation. No production test is performed at the temperature range limits
2. Maximum values include unavoidable inaccuracies of the industrial tests
3. Response time is measured 10%/90% of the final output value with the following conditions: inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} - 100\text{ mV}$  to  $V_{icm} + \text{overdrive}$ .
4. Response time is measured 10%/90% of the final output value with the following conditions: Inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} + 100\text{ mV}$  to  $V_{icm} - \text{overdrive}$ .

**Table 5. Electrical characteristics at  $V_{CC} = 3.3\text{ V}$ ,  $T_{amb} = 25\text{ °C}$ , and full  $V_{icm}$  range (unless otherwise specified)**

| Symbol                   | Parameter                                                  | Test conditions <sup>(1)</sup>                                                               | Min. | Typ. | Max. | Unit                    |
|--------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------|------|------|------|-------------------------|
| $V_{IO}$                 | Input offset voltage                                       | TS3021A                                                                                      |      | 0.5  | 2    | mV                      |
|                          |                                                            | TS3021                                                                                       |      | 0.5  | 6    |                         |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$ , TS3021A                                          |      |      | 4    |                         |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$ , TS3021                                           |      |      | 7    |                         |
| $\Delta V_{IO}/\Delta T$ | Input offset voltage drift                                 | $-40\text{ °C} < T_{amb} < 125\text{ °C}$                                                    |      | 3    | 20   | $\mu\text{V}/\text{°C}$ |
| $I_{IO}$                 | Input offset current <sup>(2)</sup>                        | $T_{amb}$                                                                                    |      | 1    | 20   | nA                      |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$                                                    |      |      | 100  |                         |
| $I_{IB}$                 | Input bias current <sup>(2)</sup>                          | $T_{amb}$                                                                                    |      | 86   | 160  | nA                      |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$                                                    |      |      | 300  |                         |
| $I_{CC}$                 | Supply current                                             | No load, output high, $V_{icm} = 0\text{ V}$                                                 |      | 75   | 90   | $\mu\text{A}$           |
|                          |                                                            | No load, output high, $V_{icm} = 0\text{ V}$ ,<br>$-40\text{ °C} < T_{amb} < 125\text{ °C}$  |      |      | 120  |                         |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$                                                  |      | 86   | 110  |                         |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$ ,<br>$-40\text{ °C} < T_{amb} < 125\text{ °C}$   |      |      | 125  |                         |
| $I_{SC}$                 | Short-circuit current                                      | Source                                                                                       |      | 26   |      | mA                      |
|                          |                                                            | Sink                                                                                         |      | 24   |      |                         |
| $V_{OH}$                 | Output voltage high                                        | $I_{source} = 1\text{ mA}$                                                                   | 3.20 | 3.25 |      | V                       |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$                                                    | 3.10 |      |      |                         |
| $V_{OL}$                 | Output voltage low                                         | $I_{sink} = 1\text{ mA}$                                                                     |      | 40   | 80   | mV                      |
|                          |                                                            | $-40\text{ °C} < T_{amb} < 125\text{ °C}$                                                    |      |      | 150  |                         |
| CMRR                     | Common mode rejection ratio                                | $0 < V_{icm} < 3.3\text{ V}$                                                                 |      | 75   |      | dB                      |
| SVR                      | Supply voltage rejection                                   | $\Delta V_{CC} = 2\text{ to }5\text{ V}$                                                     | 58   | 73   |      |                         |
| $TP_{LH}$                | Propagation delay, low to high output level <sup>(3)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV   |      | 39   | 65   | ns                      |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV    |      | 50   | 85   |                         |
| $TP_{HL}$                | Propagation delay, high to low output level <sup>(4)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV   |      | 41   | 65   |                         |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV    |      | 51   | 80   |                         |
| $T_F$                    | Fall time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV |      | 5    |      |                         |
| $T_R$                    | Rise time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV |      | 7    |      |                         |

1. All values over the temperature range are guaranteed through correlation and simulation. No production test is performed at the temperature range limits
2. Maximum values include unavoidable inaccuracies of the industrial tests
3. Response time is measured 10%/90% of the final output value with the following conditions: inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} - 100\text{ mV}$  to  $V_{icm} + \text{overdrive}$ .
4. Response time is measured 10%/90% of the final output value with the following conditions: Inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} + 100\text{ mV}$  to  $V_{icm} - \text{overdrive}$ .


**Table 6. Electrical characteristics at  $V_{CC} = 5\text{ V}$ ,  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , and full  $V_{icm}$  range (unless otherwise specified)**

| Symbol                   | Parameter                                                  | Test conditions <sup>(1)</sup>                                                                                          | Min. | Typ. | Max. | Unit                           |
|--------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------|------|------|--------------------------------|
| $V_{IO}$                 | Input offset voltage                                       | TS3021A                                                                                                                 |      | 0.5  | 2    | mV                             |
|                          |                                                            | TS3021                                                                                                                  |      | 0.5  | 6    |                                |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$ , TS3021A                                         |      |      | 4    |                                |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$ , TS3021                                          |      |      | 7    |                                |
| $\Delta V_{IO}/\Delta T$ | Input offset voltage drift                                 | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$                                                   |      | 3    | 20   | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{IO}$                 | Input offset current <sup>(2)</sup>                        | $T_{amb}$                                                                                                               |      | 1    | 20   | nA                             |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$                                                   |      |      | 100  |                                |
| $I_{IB}$                 | Input bias current <sup>(2)</sup>                          | $T_{amb}$                                                                                                               |      | 86   | 160  | nA                             |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$                                                   |      |      | 300  |                                |
| $I_{CC}$                 | Supply current                                             | No load, output high, $V_{icm} = 0\text{ V}$                                                                            |      | 77   | 95   | $\mu\text{A}$                  |
|                          |                                                            | No load, output high, $V_{icm} = 0\text{ V}$ ,<br>$-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$ |      |      | 125  |                                |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$                                                                             |      | 89   | 115  |                                |
|                          |                                                            | No load, output low, $V_{icm} = 0\text{ V}$ ,<br>$-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$  |      |      | 135  |                                |
| $I_{SC}$                 | Short-circuit current                                      | Source                                                                                                                  |      | 51   |      | mA                             |
|                          |                                                            | Sink                                                                                                                    |      | 40   |      |                                |
| $V_{OH}$                 | Output voltage high                                        | $I_{source} = 4\text{ mA}$                                                                                              | 4.80 | 4.84 |      | V                              |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$                                                   | 4.70 |      |      |                                |
| $V_{OL}$                 | Output voltage low                                         | $I_{sink} = 4\text{ mA}$                                                                                                |      | 130  | 180  | mV                             |
|                          |                                                            | $-40\text{ }^{\circ}\text{C} < T_{amb} < 125\text{ }^{\circ}\text{C}$                                                   |      |      | 250  |                                |
| CMRR                     | Common mode rejection ratio                                | $0 < V_{icm} < 5\text{ V}$                                                                                              |      | 79   |      | dB                             |
| SVR                      | Supply voltage rejection                                   | $\Delta V_{CC} = 2\text{ to }5\text{ V}$                                                                                | 58   | 73   |      |                                |
| $TP_{LH}$                | Propagation delay, low to high output level <sup>(3)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV                              |      | 42   | 75   | ns                             |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV                               |      | 54   | 105  |                                |
| $TP_{HL}$                | Propagation delay, high to low output level <sup>(4)</sup> | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 100 mV                              |      | 45   | 75   |                                |
|                          |                                                            | $V_{icm} = 0\text{ V}$ , $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ ,<br>overdrive = 20 mV                               |      | 55   | 95   |                                |
| $T_F$                    | Fall time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV                            |      | 4    |      |                                |
| $T_R$                    | Rise time                                                  | $f = 10\text{ kHz}$ , $CL = 50\text{ pF}$ , $RL = 10\text{ k}\Omega$ ,<br>overdrive = 100 mV                            |      | 4    |      |                                |


1. All values over the temperature range are guaranteed through correlation and simulation. No production test is performed at the temperature range limits
2. Maximum values include unavoidable inaccuracies of the industrial tests
3. Response time is measured 10%/90% of the final output value with the following conditions: inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} - 100\text{ mV}$  to  $V_{icm} + \text{overdrive}$ .
4. Response time is measured 10%/90% of the final output value with the following conditions: Inverting input voltage ( $IN^-$ ) =  $V_{icm}$  and non-inverting input voltage ( $IN^+$ ) moving from  $V_{icm} + 100\text{ mV}$  to  $V_{icm} - \text{overdrive}$ .

## 4 Electrical characteristic curves


**Figure 2. Current consumption vs. supply voltage**  
( $V_{ICM} = 0\text{ V}$ , output high)

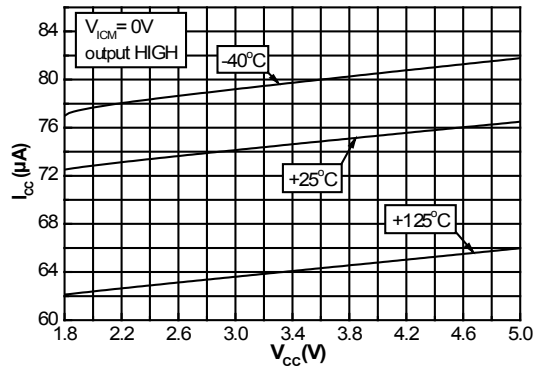


**Figure 3. Current consumption vs. supply voltage**  
( $V_{ICM} = V_{CC}$  output high)

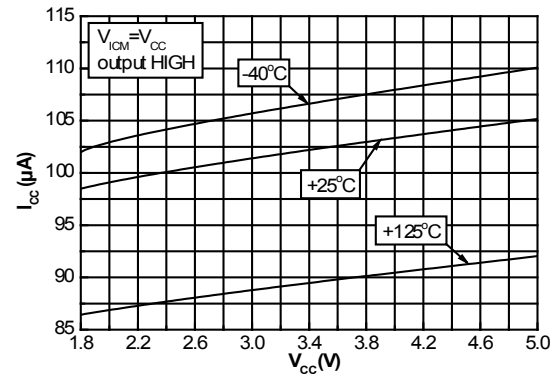


**Figure 4. Current consumption vs. supply voltage**  
( $V_{ICM} = 0\text{ V}$ , output low)

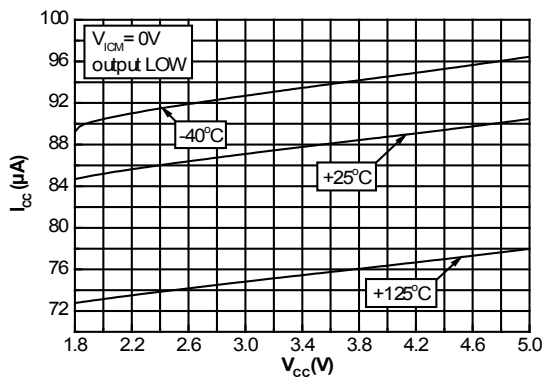


**Figure 5. Current consumption vs. supply voltage**  
( $V_{ICM} = V_{CC}$  output low)

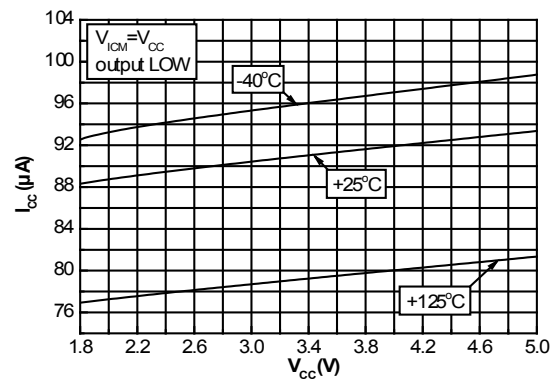


**Figure 6. Output voltage vs. source current,  $V_{CC} = 2\text{ V}$**

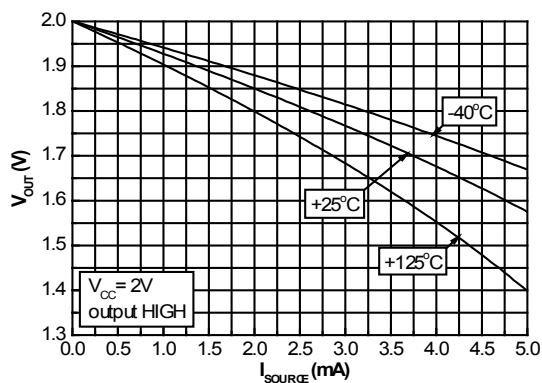


**Figure 7. Output voltage vs. sink current,  $V_{CC} = 2\text{ V}$**

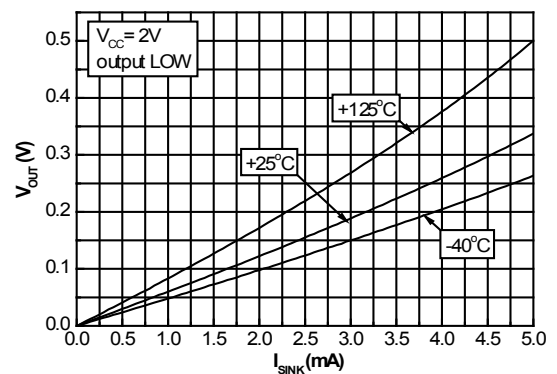


**Figure 8. Output voltage vs. source current,  $V_{CC} = 3.3\text{ V}$**

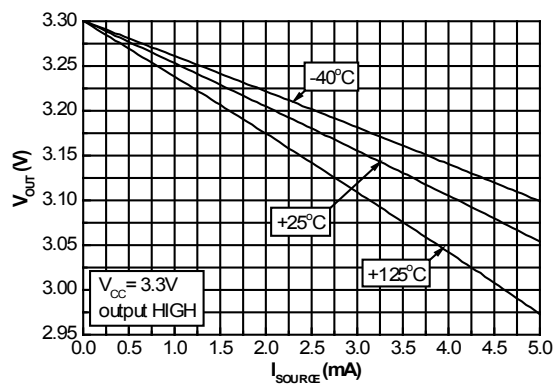


**Figure 9. Output voltage vs. sink current,  $V_{CC} = 3.3\text{ V}$**

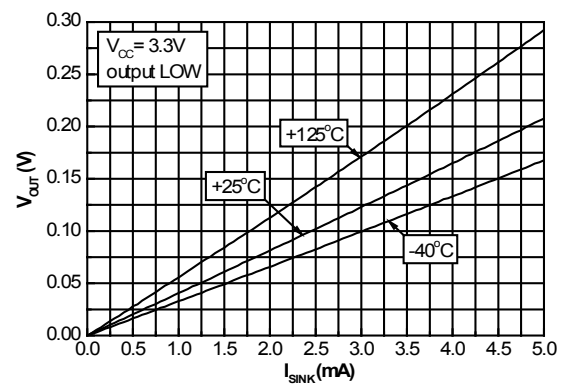


**Figure 10. Output voltage vs. source current,  $V_{CC} = 5\text{ V}$**

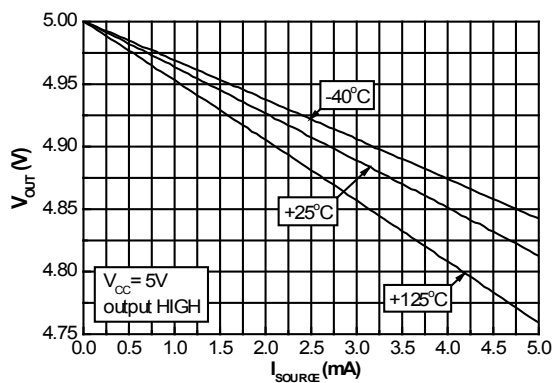


**Figure 11. Output voltage vs. sink current,  $V_{CC} = 5\text{ V}$**

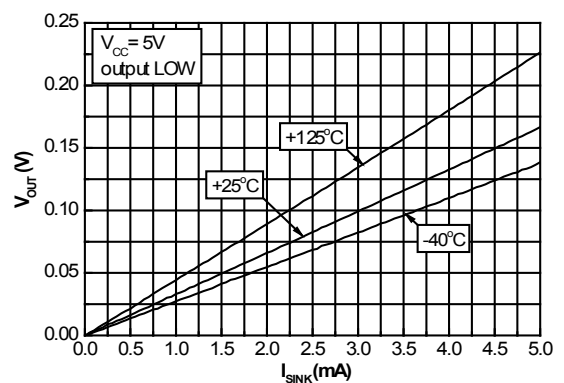

**Figure 12. Input offset voltage vs. temperature and common mode voltage**

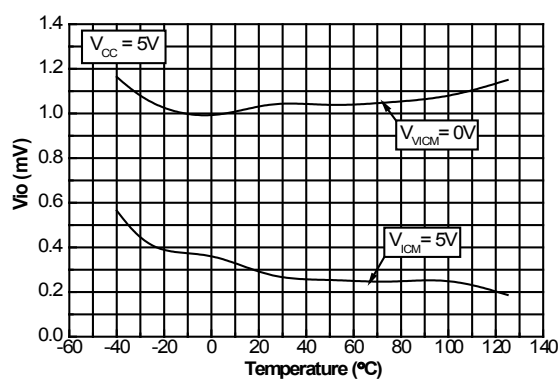


**Figure 13. Input bias current vs. temperature and input voltage**

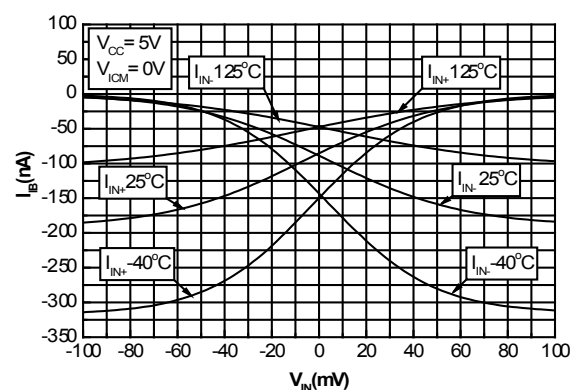





**Figure 14. Current consumption vs. commutation frequency**

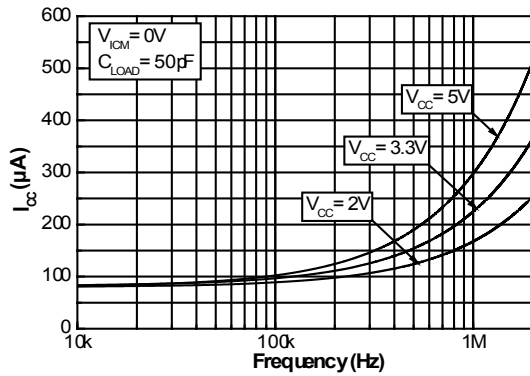


**Figure 15. Propagation delay (HL) vs. overdrive at  $V_{cc} = 2V$ ,  $V_{cm} = 0V$**

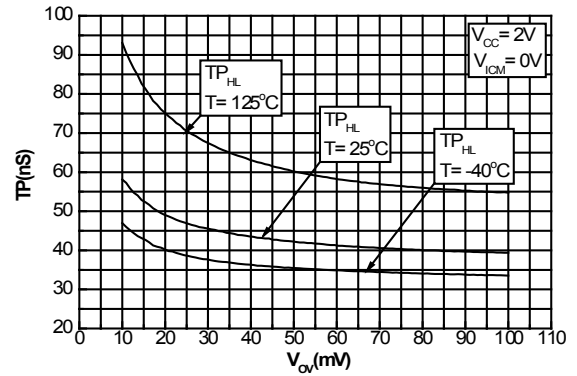


**Figure 16. Propagation delay (HL) vs. overdrive at  $V_{cc} = 2V$ ,  $V_{cm} = V_{cc}$**

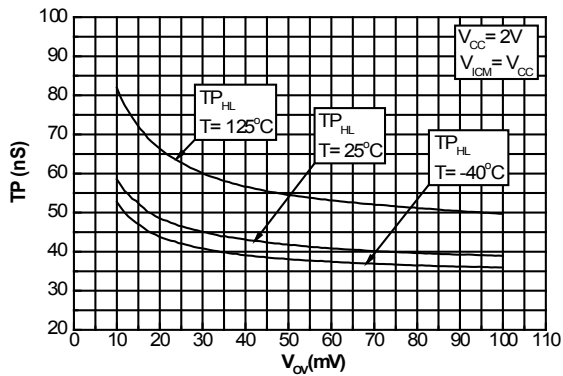


**Figure 17. Propagation delay (LH) vs. overdrive at  $V_{cc} = 2V$ ,  $V_{cm} = 0V$**

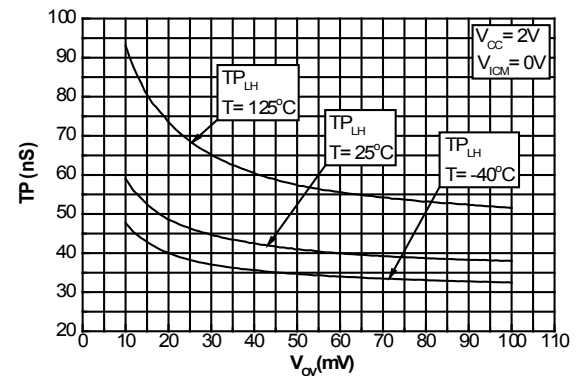


**Figure 18. Propagation delay (LH) vs. overdrive at  $V_{cc} = 2V$ ,  $V_{cm} = V_{cc}$**

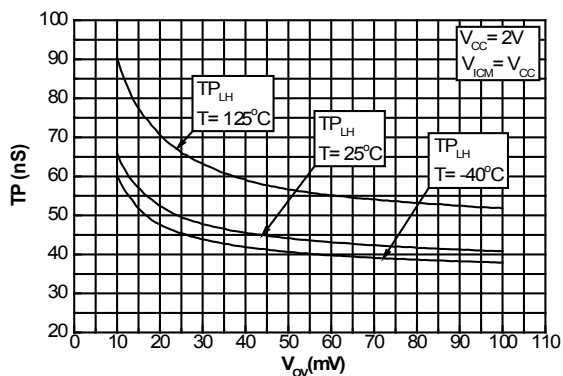


**Figure 19. Propagation delay (HL) vs. overdrive at  $V_{cc} = 3.3V$ ,  $V_{cm} = 0V$**

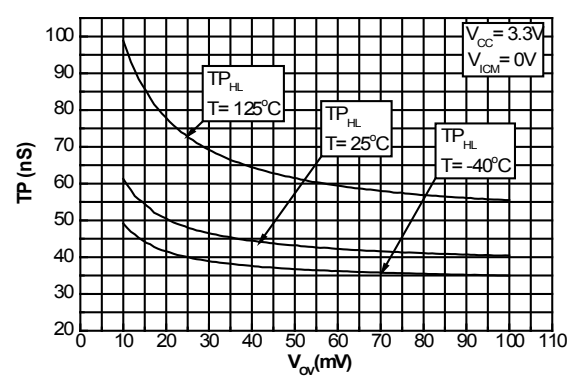


**Figure 20. Propagation delay (HL) vs. overdrive at  $V_{CC} = 3.3\text{ V}$ ,  $V_{ICM} = V_{CC}$**

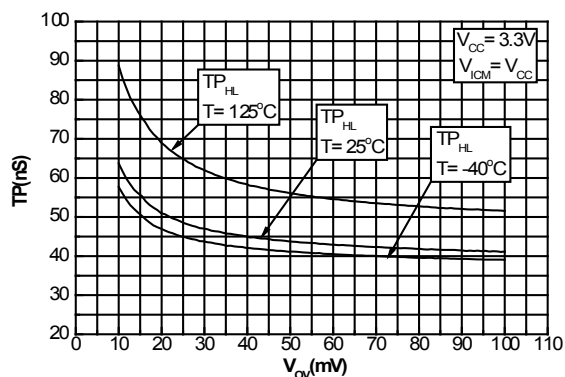


**Figure 21. Propagation delay (LH) vs. overdrive at  $V_{CC} = 3.3\text{ V}$ ,  $V_{ICM} = 0\text{ V}$**

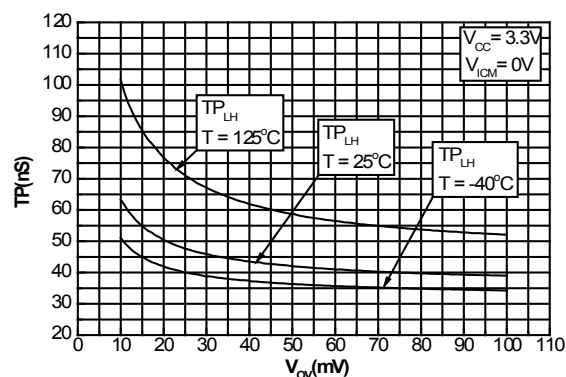


**Figure 22. Propagation delay (LH) vs. overdrive at  $V_{CC} = 3.3\text{ V}$ ,  $V_{ICM} = V_{CC}$**

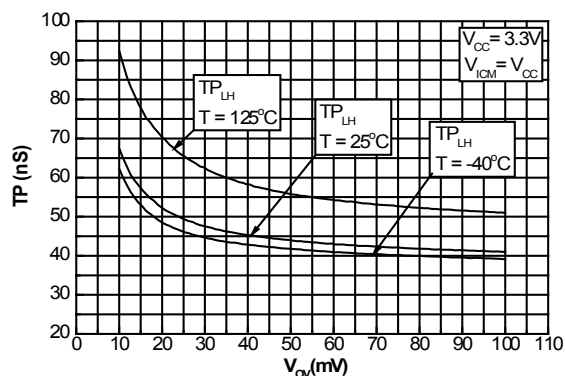


**Figure 23. Propagation delay (HL) vs. overdrive at  $V_{CC} = 5\text{ V}$ ,  $V_{ICM} = 0\text{ V}$**

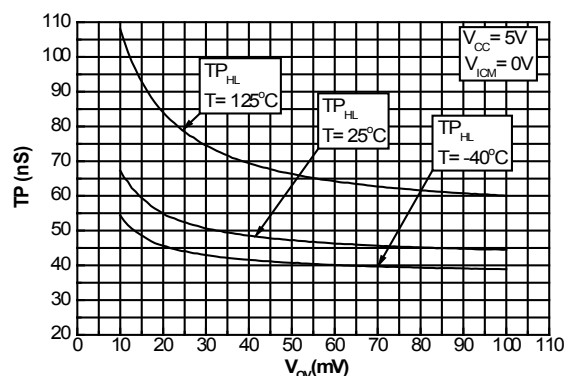


**Figure 24. Propagation delay (HL) vs. overdrive at  $V_{CC} = 5\text{ V}$ ,  $V_{ICM} = V_{CC}$**

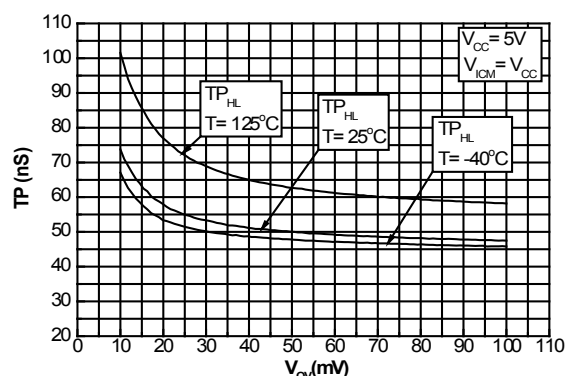


**Figure 25. Propagation delay (LH) vs. overdrive at  $V_{CC} = 5\text{ V}$ ,  $V_{ICM} = 0\text{ V}$**

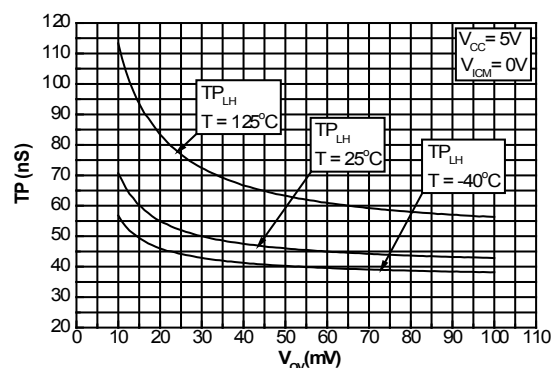


**Figure 26. Propagation delay (LH) vs. overdrive at  $V_{CC} = 5\text{ V}$ ,  $V_{ICM} = V_{CC}$**

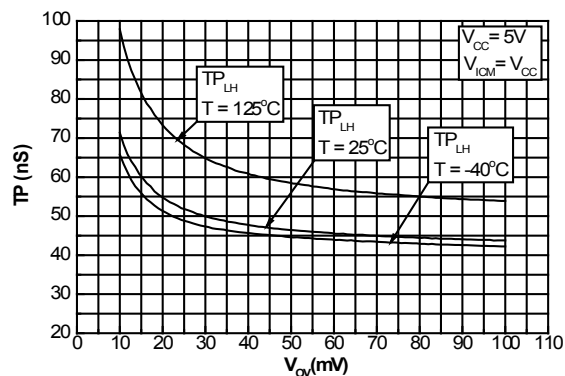

**Figure 27. Propagation delay vs. temperature,  $V_{CC} = 5\text{ V}$ , overdrive = 100 mV**

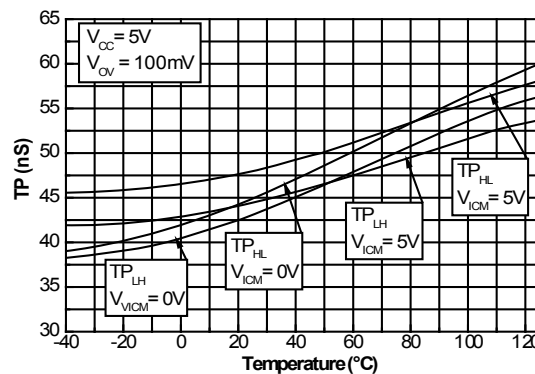

**Figure 28. Propagation delay vs. common mode voltage,  $V_{CC} = 5\text{ V}$**

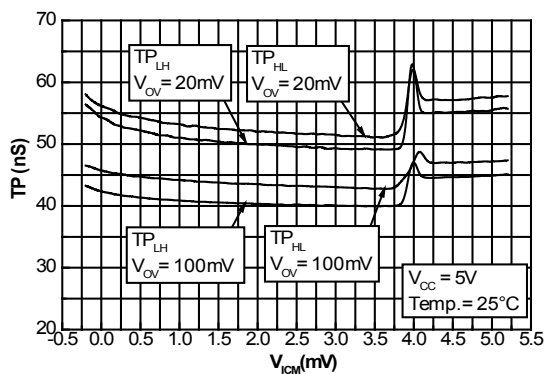

---


## 5 Package information

---

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

## 5.1 SOT23-5 package information

**Figure 29. SOT23-5 package outline**

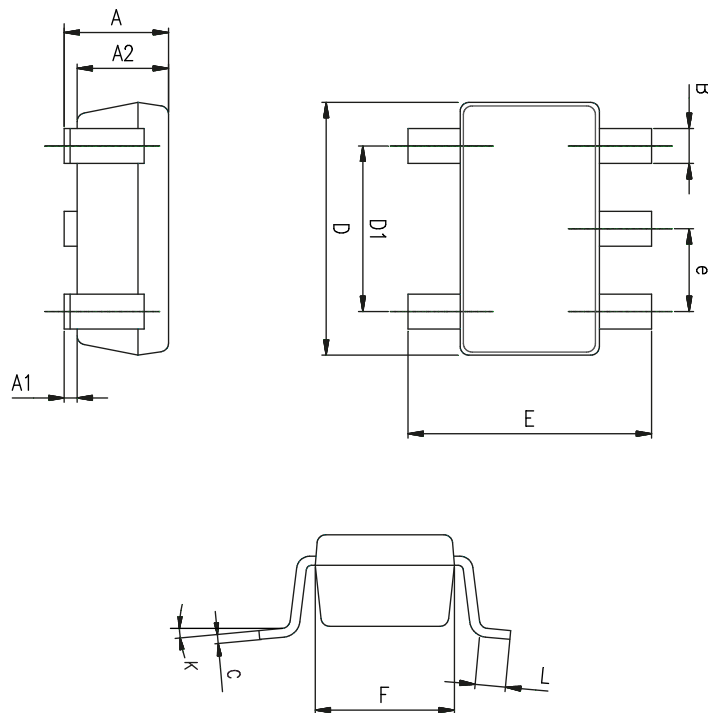


**Table 7. SOT23-5 mechanical data**

| Ref. | Dimensions  |      |            |           |       |            |
|------|-------------|------|------------|-----------|-------|------------|
|      | Millimeters |      |            | Inches    |       |            |
|      | Min.        | Typ. | Max.       | Min.      | Typ.  | Max.       |
| A    | 0.90        | 1.20 | 1.45       | 0.035     | 0.047 | 0.057      |
| A1   |             |      | 0.15       |           |       | 0.006      |
| A2   | 0.90        | 1.05 | 1.30       | 0.035     | 0.041 | 0.051      |
| B    | 0.35        | 0.40 | 0.50       | 0.014     | 0.016 | 0.020      |
| C    | 0.09        | 0.15 | 0.20       | 0.004     | 0.006 | 0.008      |
| D    | 2.80        | 2.90 | 3.00       | 0.110     | 0.114 | 0.118      |
| D1   |             | 1.90 |            |           | 0.075 |            |
| e    |             | 0.95 |            |           | 0.037 |            |
| E    | 2.60        | 2.80 | 3.00       | 0.102     | 0.110 | 0.118      |
| F    | 1.50        | 1.60 | 1.75       | 0.059     | 0.063 | 0.069      |
| L    | 0.10        | 0.35 | 0.60       | 0.004     | 0.014 | 0.024      |
| K    | 0 degrees   |      | 10 degrees | 0 degrees |       | 10 degrees |

## 5.2 SC70-5 (or SOT323-5) package information

**Figure 30. SC70-5 (or SOT323-5) package outline**

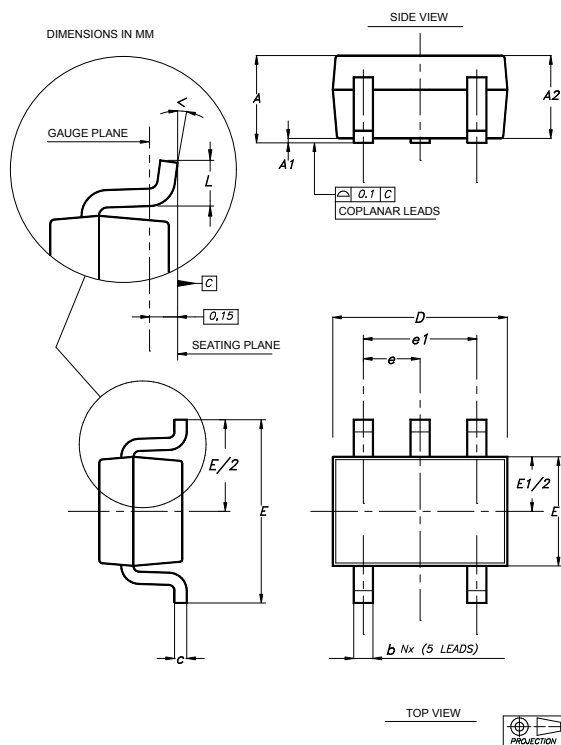

**Table 8. SC70-5 (or SOT323-5) mechanical data**

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.80        |      | 1.10 | 0.032  |       | 0.043 |
| A1   |             |      | 0.10 |        |       | 0.004 |
| A2   | 0.80        | 0.90 | 1.00 | 0.032  | 0.035 | 0.039 |
| b    | 0.15        |      | 0.30 | 0.006  |       | 0.012 |
| c    | 0.10        |      | 0.22 | 0.004  |       | 0.009 |
| D    | 1.80        | 2.00 | 2.20 | 0.071  | 0.079 | 0.087 |
| E    | 1.80        | 2.10 | 2.40 | 0.071  | 0.083 | 0.094 |
| E1   | 1.15        | 1.25 | 1.35 | 0.045  | 0.049 | 0.053 |
| e    |             | 0.65 |      |        | 0.025 |       |
| e1   |             | 1.30 |      |        | 0.051 |       |
| L    | 0.26        | 0.36 | 0.46 | 0.010  | 0.014 | 0.018 |
| <    | 0°          |      | 8°   | 0°     |       | 8°    |

## 6 Ordering information

**Table 9. Order codes**

| Order code                | Temperature range | Package | Packaging     | Marking |
|---------------------------|-------------------|---------|---------------|---------|
| TS3021ILT                 | -40 to 125 °C     | SOT23-5 | Tape and reel | K520    |
| TS3021IYLT <sup>(1)</sup> |                   |         |               | K529    |
| TS3021ICT                 |                   | SC70-5  |               | K52     |
| TS3021IYCT <sup>(1)</sup> |                   |         |               | K5S     |
| TS3021AILT                |                   | SOT23-5 |               | K522    |

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent

## Revision history

**Table 10. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01-Jun-2006 | 1        | Initial release                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 01-Sep-2006 | 2        | Dual version added<br>Pinout of single TS3021 corrected<br>Modified temperature range for input common mode voltage                                                                                                                                                                                                                                                                                                                                                                                                   |
| 22-Feb-2007 | 3        | Addition of MiniSO-8 package for dual version                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 17-Oct-2007 | 4        | Marking corrected for SO-8 package<br>Thermal resistance values corrected in AMR table<br>Notes on ESD added in AMR table                                                                                                                                                                                                                                                                                                                                                                                             |
| 04-Dec-2008 | 5        | Dual version (TS3022) removed<br>ESD tolerance modified in Table 1: Absolute maximum ratings<br>Made the following changes in Table 3:<br>– modified $V_{io}$ typical value and maximum limits<br>– modified $I_{ib}$ typical value<br>– modified $I_{cc}$ typical values and corrected maximum limits<br>– modified $I_{sc}$ typical values<br>– modified $V_{oh}$ and $V_{ol}$ typical values<br>– modified CMRR and SVR typical values<br>– modified $T_{PHI}$ and $T_{PLH}$ typical values<br>All curves modified |
| 03-Jan-2013 | 6        | Features: added “automotive qualification”; added Related products.<br>Table 1 and Table 2: $V_{dd}$ and $V_{cc}$ replaced by $(V_{cc-})$ and $(V_{cc+})$ respectively.<br>Table 3, Table 4, and Table 5: replaced $\Delta V_{io}$ symbol with $\Delta V_{io}/\Delta T$ .<br>Table 6 and Table 7: minor update (added angle dimensions to “inches” columns).<br>Table 8: added automotive order code                                                                                                                  |
| 02-Jun-2015 | 7        | Table 3, Table 4, and Table 5: updated $V_{io}$ parameter<br>Table 6: small “rounding-off modifications to inches parameter<br>Table 8: added order code TS3021AILT                                                                                                                                                                                                                                                                                                                                                   |
| 07-Jul-2016 | 8        | Added new part number TS3021A<br>Updated document layout<br>Table 3, Table 4, and Table 5: updated VIO test conditions and values.                                                                                                                                                                                                                                                                                                                                                                                    |
| 17-Oct-2022 | 9        | Added new TS3021IYCT order code in Table 8. Order codes.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 09-Apr-2025 | 10       | Updated figure on the cover page.<br>Added new <a href="#">Section 1: Pin configuration</a> .                                                                                                                                                                                                                                                                                                                                                                                                                         |



**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved