

# Advanced Synchronous Rectifier Controller for LLC Resonant Converter

## NCP4318

NCP4318 is an advanced synchronous rectification (SR) controller for LLC resonant converter with minimum external components. It has two gate drivers for driving the SR MOSFETs rectifying the outputs of the secondary transformer windings. The two gate drivers have their own drain and source sensing pins and operate independently of each other. The advanced adaptive dead time control compensates the voltage across parasitic inductance to minimize the body diode conduction and maximize the system efficiency. The advanced turn-off control algorithm allows stable SR operation over entire load range. NCP4318 has two versions of pin assignment – NCP4318A, NCP4318B, and two types of package – SOIC–8 and SOIC–8 EP.

### Features


- Mixed Mode SR Turn-off Control
- Anti Shoot-through Control for Reliable SR Operation
- 200 V–rated Drain Sensing and Dedicated Source Sensing Pins
- Advanced Adaptive Dead Time Control
- SR Current Inversion Detection
- Adaptive Minimum Turn-on Time for Noise Immunity
- SR Conduction Time Increase Rate Limitation
- Multi-level Turn-off Threshold Voltage
- Adaptive Gate Voltage (10 V, 6 V)
- Low Operating Current (100  $\mu$ A) in Green Mode
- Soft Start with 0 V / 6 V Gate Output Voltage
- Short Turn-on and Turn-off Delay Time (30 ns / 30 ns)
- High Gate Sourcing and Sinking Current (1.5 A / 4.5 A)
- Wide Operating Supply Voltage Range from 6.5 V to 35 V
- Wide Operating Frequency Range (22 kHz to 500 kHz)
- SOIC–8 and SOIC–8 EP Packages
- These Devices are Pb–Free and are RoHS Compliant

### Applications

- High Power Density Adapters
- Large Screen LED–TV and OLED–TV Power Supplies
- High Efficiency Desktop and Server Power Supplies
- Networking and Telecom Power Supplies
- High Power LED Lighting





### MARKING DIAGRAM



U = Pin Layout, A and B  
V = Frequency, H: High, L: Low  
WX = Additional IPT Option  
A = Assembly Location  
WL = Wafer Lot Traceability  
YYWW = Date Code

### PIN CONNECTIONS



(Top View)

### ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 3 of this data sheet.

# NCP4318

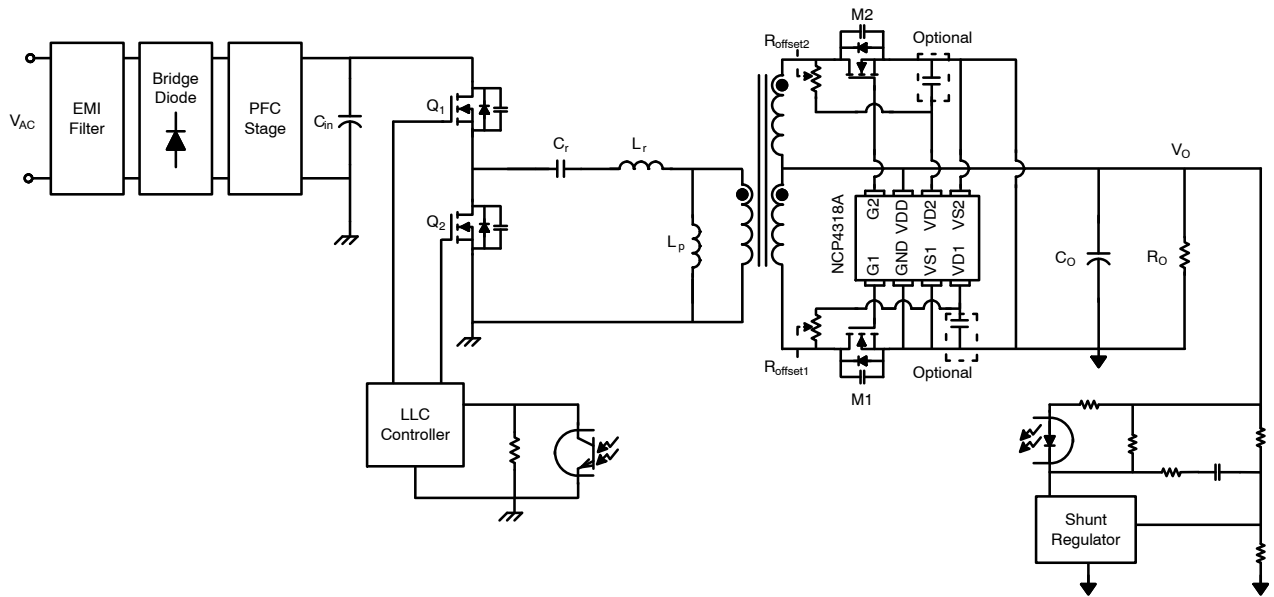


Figure 1. Typical Application Schematic of NCP4318

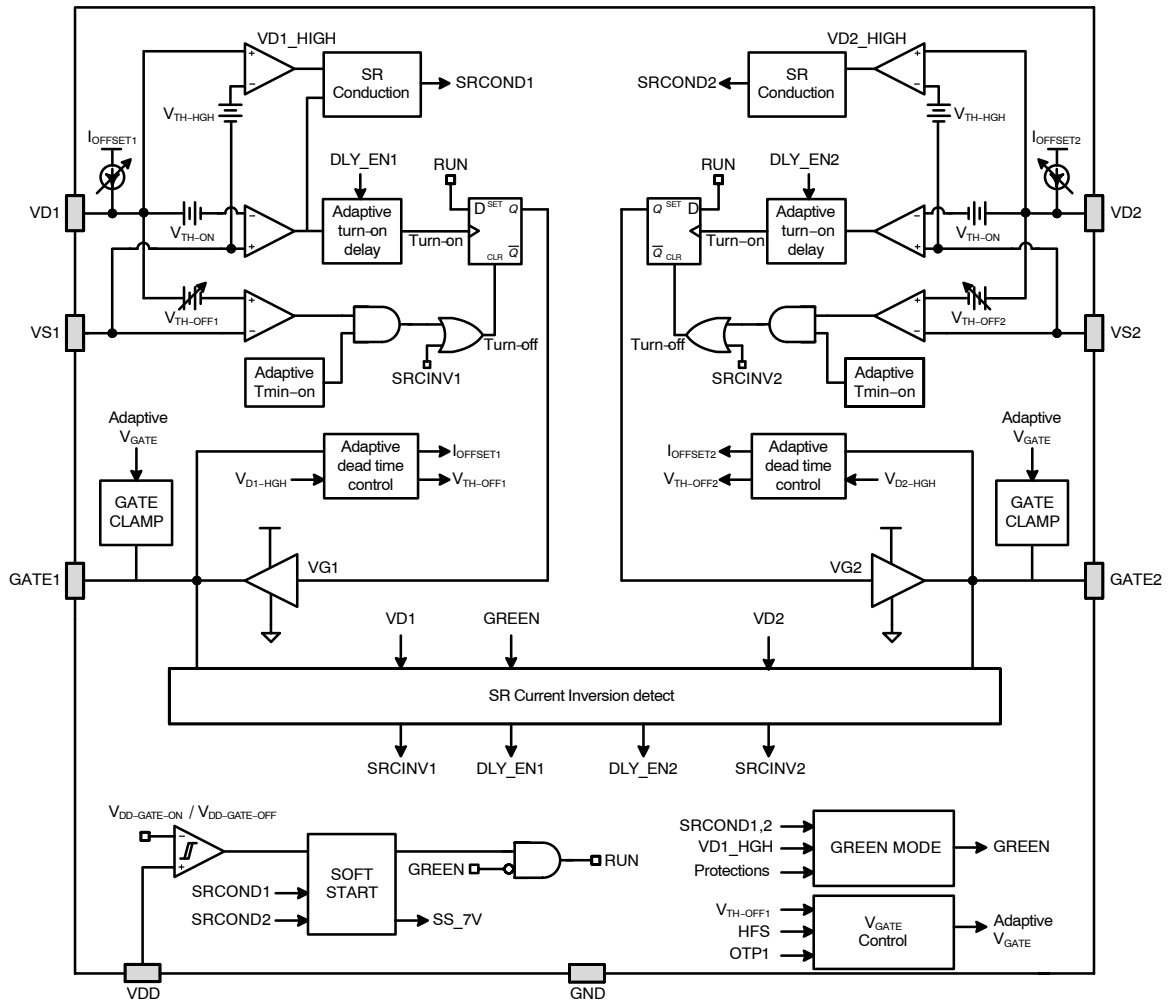


Figure 2. Internal Block Diagram of NCP4318

# NCP4318

## PIN DESCRIPTION

| Pin Number   |          | Name  | Description                                                                                                                                                                                                                                                                                                                        |
|--------------|----------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NCP4318A     | NCP4318B |       |                                                                                                                                                                                                                                                                                                                                    |
| 1            | 1        | GATE1 | Gate drive output for SR MOSFET1                                                                                                                                                                                                                                                                                                   |
| 2            | 2        | GND   | Ground                                                                                                                                                                                                                                                                                                                             |
| 3            | 4        | VS1   | Synchronous rectifier source sense input for SR1                                                                                                                                                                                                                                                                                   |
| 4            | 3        | VD1   | Synchronous rectifier drain sense input. $I_{OFFSET1}$ current source flows out of the VD1 pin such that an external series resistor can be used to adjust the synchronous rectifier turn-off threshold. The $I_{OFFSET1}$ current source is turned off when $V_{DD}$ is under-voltage or when switching is disabled in green mode |
| 5            | 5        | VS2   | Synchronous rectifier source sense input for SR2                                                                                                                                                                                                                                                                                   |
| 6            | 6        | VD2   | Synchronous rectifier drain sense input. $I_{OFFSET2}$ current source flows out of the VD2 pin such that an external series resistor can be used to adjust the synchronous rectifier turn-off threshold. The $I_{OFFSET2}$ current source is turned off when $V_{DD}$ is under-voltage or when switching is disabled in green mode |
| 7            | 7        | VDD   | Supply Voltage                                                                                                                                                                                                                                                                                                                     |
| 8            | 8        | GATE2 | Gate drive output for SR MOSFET2                                                                                                                                                                                                                                                                                                   |
| Exposed pad† |          | EP    | EP is floating from electrical connection to the chip. We recommend connecting it to GND or keeping it floating.                                                                                                                                                                                                                   |

†Exposed pad applies to parts with SOIC-8 EP package. SOIC-8 package options do not have this pin.

## ORDERING INFORMATION

| Ordering Code   | Device Marking | Package                | Shipping†          |
|-----------------|----------------|------------------------|--------------------|
| NCP4318AHDDR2G  | NCP4318AHD     | SOIC-8<br>(Pb-Free)    | 2500 / Tape & Reel |
| NCP4318AHJDR2G  | NCP4318AHJ     |                        |                    |
| NCP4318ALCDR2G  | NCP4318ALC     |                        |                    |
| NCP4318ALKDR2G  | NCP4318ALK     |                        |                    |
| NCP4318ALLDR2G  | NCP4318ALL     |                        |                    |
| NCP4318ALSDR2G  | NCP4318ALS     |                        |                    |
| NCP4318BLCDR2G  | NCP4318BLC     |                        |                    |
| NCP4318ALFPDR2G | NCP4318ALFP    | SOIC-8 EP<br>(Pb-Free) |                    |
| NCP4318ALGPDR2G | NCP4318ALGP    |                        |                    |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NCP4318

## MAXIMUM RATINGS

| Symbol                   | Rating                                                                         |                                                                                                         | Value        | Unit             |
|--------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------|------------------|
| $V_{DD}$                 | Power Supply Input Pin Voltage                                                 |                                                                                                         | -0.3 to 37   | V                |
| $V_{D1}, V_{D2}$         | Drain Sense Input Pin Voltage                                                  |                                                                                                         | -4 to 200    | V                |
| $V_{GATE1}, V_{GATE2}$   | Gate Drive Output Pin Voltage                                                  |                                                                                                         | -0.3 to 17   | V                |
| $V_{S1}, V_{S2}$         | Source Sense Input Pin Voltage                                                 |                                                                                                         | -0.3 to 5.5  | V                |
| $V_{S1-DYN}, V_{S2-DYN}$ | Source Sense Input Pin Dynamic Voltage (Pulse Width = 200 ns)                  |                                                                                                         | -4 to 5.5    | V                |
| $P_D$                    | Power Dissipation ( $T_A = 25^\circ\text{C}$ )<br>SOIC-8<br>SOIC-8 EP (Note 3) |                                                                                                         | 0.625<br>3.7 | W                |
| $T_J$                    | Maximum Junction Temperature                                                   |                                                                                                         | -40 to 150   | $^\circ\text{C}$ |
| $T_{STG}$                | Storage Temperature Range                                                      |                                                                                                         | -60 to 150   | $^\circ\text{C}$ |
| $T_L$                    | Lead Temperature (Soldering, 10 Seconds)                                       |                                                                                                         | 260          | $^\circ\text{C}$ |
| ESD                      | Electrostatic Discharge Capability                                             | Human Body Model,<br>ANSI / ESDA / JEDEC JS-001-2012<br>(except VD1, VD2 pin)                           | 3            | kV               |
|                          |                                                                                | Human Body Model,<br>VD1-GND, VD2-GND pin to pin with 330-pF (Note 2)<br>capacitance on VD1 and VD2 pin | 2            |                  |
|                          |                                                                                | Charged Device Model, JESD22-C101                                                                       | 1            |                  |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. All voltage values are with respect to the GND pin.
2. The capacitance can be replaced by  $C_{OSS}$  of MOSFET.
3. Same test condition as in Note 5.

## THERMAL CHARACTERISTICS

| Symbol          | Rating                                                                                                                                 | Value     | Unit                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------------|
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient.<br>SOIC-8 (Note 4)<br>SOIC-8 EP (Note 5)                                                      | 165<br>27 | $^\circ\text{C}/\text{W}$ |
| $R_{\psi JT}$   | Thermal Characterization Parameter between Junction and the Center of the Top of the Package.<br>SOIC-8 (Note 4)<br>SOIC-8 EP (Note 5) | 22<br>3   | $^\circ\text{C}/\text{W}$ |

4. JEDEC standard: JESD51-2 (still air natural convection) and JESD51-3 (1s0p).
5. JEDEC standard: JESD51-2 (still air natural convection) and JESD51-7 (2s2p) with four 0.2-mm-in-diameter Cu-plated thermal vias under the exposed pad. The vias connect to all buried planes and a bottom-side trace of the test board.

## RECOMMENDED OPERATING CONDITIONS

| Symbol           | Rating                                 | Min  | Max  | Unit             |
|------------------|----------------------------------------|------|------|------------------|
| $V_{DD}$         | VDD Pin Supply Voltage to GND (Note 6) | 0    | 35   | V                |
| $V_{D1}, V_{D2}$ | Drain Sense Input Pin Voltage          | -0.7 | 180  | V                |
| $V_{S1}, V_{S2}$ | Source Sense Input Pin Voltage         | -0.3 | 5    | V                |
| $T_J$            | Operating Junction Temperature         | -40  | +125 | $^\circ\text{C}$ |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

6. Allowable operating supply voltage  $V_{DD}$  can be limited by the power dissipation of NCP4318 related to switching frequency, load capacitance and ambient temperature.

# NCP4318

## ELECTRICAL CHARACTERISTICS

( $V_{DD} = 12\text{ V}$  and  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$  unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### SUPPLY VOLTAGE AND CURRENT SECTION

|                   |                                                                    |                                                                                                                                                                 |     |     |     |               |
|-------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| $V_{DD-ON}$       | Turn-on Threshold                                                  | $V_{DD}$ rising with 4.3 V / 1 ms                                                                                                                               |     | 4.0 | 4.3 | V             |
| $V_{DD-OFF}$      | Turn-off Threshold                                                 | $V_{DD} < V_{DD-OFF}$                                                                                                                                           | 3.6 | 3.8 |     | V             |
| $V_{DD-GATE-ON}$  | SR Gate Enable Threshold Voltage                                   | $V_{DD} > V_{DD-GATE-ON}$                                                                                                                                       |     | 6.5 | 7.1 | V             |
| $V_{DD-GATE-OFF}$ | SR Gate Disable Threshold Voltage (Note 7)                         | $V_{DD} < V_{DD-GATE-OFF}$                                                                                                                                      | 5.0 | 6.0 |     | V             |
| $I_{DD-OP1}$      | Operating Current                                                  | $f_{SW} = 100\text{ kHz}$ , $C_{GATE} = 1\text{ nF}$                                                                                                            |     | 8   | 10  | mA            |
| $I_{DD-OP0}$      | Operating Current                                                  | $f_{SW} = 100\text{ kHz}$ , $C_{GATE} = 0\text{ nF}$                                                                                                            |     |     | 6   | mA            |
| $I_{DD-START}$    | Start-up Current                                                   | $V_{DD} = V_{DD-ON} - 0.1\text{ V}$                                                                                                                             |     |     | 100 | $\mu\text{A}$ |
| $I_{DD-GREEN}$    | Operating Current in Green Mode                                    | $V_{DD} = 12\text{ V}$ (no $V_{D1/2}$ switching)<br>GREEN1 enable at $T_J = 25^\circ\text{C}$<br>Excluding ALFP and ALGP                                        |     | 100 | 210 | $\mu\text{A}$ |
| $\eta_{SS-SKIP}$  | Number of $V_{D1/2}$ Alternative Switching for Soft Start Skipping | $V_{D1/2}$ falling lower than $V_{TH-ON}$ & $V_{D1/2}$ rising higher than $V_{TH-HGH}$ & No GATE output at $f_{SW} = 200\text{ kHz}$ , $C_{GATE} = 0\text{ nF}$ |     | 255 |     | Cycle         |

### DRAIN VOLTAGE SENSING SECTION

|                   |                                                                           |                                                                                                                                                       |                    |                      |                      |               |
|-------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|----------------------|---------------|
| $V_{OSI}$         | Comparator Input Offset Voltage (Note 7)                                  |                                                                                                                                                       | -1                 | 0                    | 1                    | mV            |
| $I_{DRAIN-LKG}$   | Drain Pin Leakage Current                                                 | $V_{D1/2} = 200\text{ V}$                                                                                                                             |                    |                      | 1                    | $\mu\text{A}$ |
| $V_{TH-ON}$       | Turn-on Threshold (Note 7)                                                | $R_{OFFSET} = 0\ \Omega$ (includes comparator input offset voltage)                                                                                   |                    | -100                 |                      | mV            |
| $t_{OFF-MIN}$     | Minimum Off-time                                                          | From $V_{D1/2}$ higher than $V_{TH-HGH}$<br>in ALS<br>in AHD, AHJ<br>in ALC, ALK, ALL, BLC, ALFP, ALGP                                                | 450<br>750<br>1400 | 800<br>1150<br>2000  | 1150<br>1550<br>2800 | ns            |
| $t_{ON-DLY}$      | Turn-on Propagation Delay                                                 | Turn-on comparator delay From $V_{D1/2} = -0.2$ to $V_{GATE} = 1\text{ V}$ , when $DLY\_EN = 0$                                                       |                    | 30                   | 80                   | ns            |
| $t_{ON-DLY2}$     | Turn-on De-bounce Time When Additional Turn-on Delay is Enabled (Notes 7) | Turn-on comparator delay From $V_{D1/2} = -0.2$ to $V_{GATE} = 1\text{ V}$ , when $DLY\_EN = 1$ .<br>in AHD, AHJ, ALC, ALK, ALL, ALS, BLC, ALFP, ALGP |                    | 240                  |                      | ns            |
| $t_{OFF-DLY}$     | Turn-off Propagation Delay                                                | Turn-off comparator delay From $V_{D1/2} = 0.6$ to $V_{GATE} = 5.7\text{ V}$                                                                          |                    | 30                   | 80                   | ns            |
| $V_{TH-OFF-MIN}$  | Minimum Turn-off Threshold Voltage (Notes 7, 8)                           | $R_{OFFSET} = 0\ \Omega$ (includes comparator input offset voltage)<br>in ALC, ALK, ALL, ALS, BLC<br>in AHD, AHJ, ALFP, ALGP                          |                    | -6<br>-14            |                      | mV            |
| $V_{TH-OFF-STEP}$ | Step Size of Adaptive Turn-off Threshold Voltage (Note 7, 8)              | $R_{OFFSET} = 0\ \Omega$<br>in AHD, AHJ, ALC, BLC, ALL, ALFP, ALGP<br>in ALK, ALS                                                                     |                    | 4<br>8               |                      | mV            |
| $V_{TH-OFF-MAX}$  | Maximum Turn-off Threshold Voltage (Notes 7, 8)                           | $R_{OFFSET} = 0\ \Omega$ ,<br>in ALC, BLC, ALL<br>in ALK, ALS<br>in AHD, AHJ, ALFP, ALGP                                                              |                    | 118<br>242<br>110    |                      | mV            |
| $V_{TH-OFF-RST}$  | Reset Value of Turn-off Threshold Voltage (Note 7)                        | $R_{OFFSET} = 0\ \Omega$ ,<br>in ALC, BLC, ALL<br>in ALK, ALS<br>in ALFP<br>in AHJ, ALGP                                                              |                    | 2<br>10<br>-6<br>-10 |                      | mV            |

# NCP4318

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = 12\text{ V}$  and  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$  unless otherwise specified.)

| Symbol                                             | Parameter                                                                                                                          | Test Conditions                                                                                                                                                                | Min        | Typ          | Max      | Unit          |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------|----------|---------------|
| <b>DRAIN VOLTAGE SENSING SECTION</b>               |                                                                                                                                    |                                                                                                                                                                                |            |              |          |               |
| $K_{2ND-VOFF}$                                     | Ratio of Second-step $V_{TH-OFF}$ to $V_{TH-OFF}$ (Note 7)                                                                         | LLD = 0. If LLD $\geq 1$ , 2 <sup>nd</sup> step<br>$V_{TH-OFF} = V_{TH-OFF}$                                                                                                   |            | 60           |          | %             |
| $K_{2ND-TOFF}$                                     | Effective On-time Duration Ratio to On-time of Last Switching Cycle for the Second Step $V_{TH-OFF}$ (Note 7)                      | LLD = 0, $t_{VG1(n-1)} = 8\text{ }\mu\text{s}$ , and $K_{2ND-TOFF} * t_{VG1(n-1)} > t_{MIN-ON}$ .<br>If $K_{2ND-TOFF} * t_{VG1(n-1)} < t_{MIN-ON}$ , $t_{VG1-70} = t_{MIN-ON}$ |            | 70           |          | %             |
| $V_{TH-HGH}$                                       | Drain Voltage High Detect Threshold Voltage (Note 7)                                                                               | $V_{D1/2}$ rising<br>in AHD, AHJ, ALC, ALK, ALL, BLC, ALFP, ALGP<br>in ALS                                                                                                     |            | 0.85<br>1.5  |          | V             |
| $t_{GATE-SKIP1}$                                   | Minimum SR Conduction Time to Enable SR when DLY_EN = 0 (3 steps $V_{TH-OFF1}$ or 2 Decrease when Gate Skip is Triggered)          | The duration from turn-on trigger to $V_{D1/2}$ rising higher than $V_{TH-HGH}$ , when DLY_EN = 0<br>in AHD, AHJ<br>in ALC, ALK, ALL, ALS, BLC, ALFP, ALGP                     | 350<br>500 | 550<br>710   |          | ns            |
| $t_{GATE-SKIP2}$                                   | Minimum SR Conduction Time to Enable SR when DLY_EN = 1 (3 steps $V_{TH-OFF1}$ or 2 Decrease when Gate Skip is Triggered) (Note 7) | The duration from turn-on trigger to $V_{D1/2}$ rising higher than $V_{TH-HGH}$ , when DLY_EN = 1<br>in AHD, AHJ<br>in ALC, ALK, ALL, ALS, BLC, ALFP, ALGP                     |            | 385<br>510   |          | ns            |
| <b>MINIMUM ON-TIME AND MAXIMUM ON-TIME SECTION</b> |                                                                                                                                    |                                                                                                                                                                                |            |              |          |               |
| $K_{TON1}$                                         | Adaptive Minimum On Time Ratio when DLY_EN = 0                                                                                     | DLY_EN=0 & $t_{SRCOND(n-1)} = 8\text{ }\mu\text{s}$<br>$t_{MIN-ON} = K_{TON1} * t_{SRCOND(n-1)}$<br>in ALFP, ALGP<br>in ALC, ALK, ALL, ALS, AHD, AHJ, BLC                      | 29<br>43   | 34<br>50     | 39<br>57 | %             |
| $K_{TON2}$                                         | Adaptive Minimum On Time Ratio when DLY_EN = 1                                                                                     | DLY_EN = 1 & $t_{SRCOND(n-1)} = 8\text{ }\mu\text{s}$<br>$t_{MIN-ON} = K_{TON2} * t_{SRCOND(n-1)}$<br>in ALFP, ALGP<br>in ALC, ALK, ALL, ALS, AHD, AHJ, BLC                    |            | 17<br>20     |          | %             |
| $t_{MIN-ON-U1}$                                    | Upper Limit of Minimum On-time when DLY_EN = 0                                                                                     | $200\text{ ns} < t_{MIN-ON} < t_{MIN-ON-U1}$ , DLY_EN = 0                                                                                                                      | 4          | 5            | 6        | $\mu\text{s}$ |
| $t_{MIN-ON-U2}$                                    | Upper Limit of Minimum On-time when DLY_EN = 1                                                                                     | $200\text{ ns} < t_{MIN-ON} < t_{MIN-ON-U2}$ , DLY_EN = 1                                                                                                                      | 2          | 2.5          | 3        | $\mu\text{s}$ |
| $K_{INV1}$                                         | SR Current Inversion Detection Window Ratio when DLY_EN = 0                                                                        | DLY_EN = 0                                                                                                                                                                     |            | = $K_{TON1}$ |          | %             |
| $K_{INV2}$                                         | SR Current Inversion Detection Window Ratio when DLY_EN = 1                                                                        | DLY_EN = 1                                                                                                                                                                     |            | = $K_{TON2}$ |          | %             |
| $\eta_{INV-EXT}$                                   | Consecutive Normal Switching Cycles to Exit SR Current Inversion State DLY_EN = 1 (Note 7)                                         | Without parasitic $V_{D1/2}$ oscillation                                                                                                                                       |            | 16k          |          | cycle         |
| $t_{SR-MAX-ON}$                                    | Maximum SR Turn-on Time (Note 7)                                                                                                   | in none<br>in ALC, ALK, ALS, AHD, AHJ, BLC, ALFP, ALGP                                                                                                                         | 21         | 30<br>Inf.   | 39       | $\mu\text{s}$ |
| $f_{MIN}$                                          | Minimum Switching Frequency (Note 7)                                                                                               | $1/(t_{SR-MAX-ON-CH1} + t_{SR-MAX-ON-CH2})$<br>in none<br>in ALC, ALK, ALL, ALS, AHD, AHJ, BLC, ALFP, ALGP                                                                     |            |              | 22<br>0  | kHz           |
| <b>DEAD TIME REGULATION SECTION</b>                |                                                                                                                                    |                                                                                                                                                                                |            |              |          |               |
| $I_{OFFSET}$                                       | Maximum of Adaptive Offset Current which have 31 Steps and 10 $\mu\text{A}$ of Resolution (Note 8)                                 | $V_{D1} = V_{D2} = 0$<br>in all except ALFP<br>in ALFP                                                                                                                         | 285        | 310<br>0     | 335      | $\mu\text{A}$ |

# NCP4318

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = 12\text{ V}$  and  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$  unless otherwise specified.)

| Symbol                              | Parameter                                                                                               | Test Conditions                                                                                                                                                                                                                                                                                        | Min        | Typ                          | Max        | Unit             |
|-------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------|------------|------------------|
| <b>DEAD TIME REGULATION SECTION</b> |                                                                                                         |                                                                                                                                                                                                                                                                                                        |            |                              |            |                  |
| $t_{\text{DEAD-LBAND}}$             | Lower Band of Dead Time Regulation (Notes 7, 8)                                                         | From $V_{\text{GATE}}$ falling below $V_{\text{GATE-LOW}}$ in ALC, ALK, ALL, ALS, BLC, ALFP, ALGP in AHD, AHJ                                                                                                                                                                                          |            | 90<br>170                    |            | ns               |
| $t_{\text{DEAD-HBAND}}$             | Upper Band of Dead Time Regulation (Notes 7, 8)                                                         | From $V_{\text{GATE}}$ falling below $V_{\text{GATE-LOW}}$ , when $\text{LLD} = 0$                                                                                                                                                                                                                     |            | $t_{\text{DEAD-LBAND}} + 90$ |            | ns               |
| $\eta_{\text{LLD1}}$                | First Light Load Detection (LLD1) Step Number based on $V_{\text{TH-OFF}}$ Modulator (Note 7)           | $\eta V_{\text{TH-OFF-CNT}} \leq \eta_{\text{LLD1}}$                                                                                                                                                                                                                                                   |            | 7                            |            |                  |
| $\eta_{\text{LLD2}}$                | Second Light Load Detection (LLD2) Step Number based on $V_{\text{TH-OFF}}$ Modulator (Note 7)          | $\eta V_{\text{TH-OFF-CNT}} \leq \eta_{\text{LLD2}}$                                                                                                                                                                                                                                                   |            | 3                            |            |                  |
| <b>GREEN MODE SECTION</b>           |                                                                                                         |                                                                                                                                                                                                                                                                                                        |            |                              |            |                  |
| $t_{\text{GRN1-ENT}}$               | Non-switching Period of SR Gate to Enter Green Mode                                                     | When SRCOND1, 2 are both low for $t_{\text{GRN1-ENT}}$ , $\text{GREEN1} = \text{HIGH}$ . in ALC, ALK, ALL, ALS, BLC in AHD, AHJ                                                                                                                                                                        | 45<br>25   | 60<br>40                     | 75<br>55   | $\mu\text{s}$    |
| $t_{\text{GRN2-ENT}}$               | Non-switching Period of SR Gate to Reset $V_{\text{TH-OFF}}$ and Set $\text{DLY\_EN}$                   | When SRCOND1, 2 are both low for $t_{\text{GRN2-ENT}}$ , generate $\text{GREEN2}$ pulse. in ALC, ALK, ALL, ALS, BLC, ALFP, ALGP in AHD, AHJ                                                                                                                                                            | 4.5<br>2.5 | 6<br>4                       | 7.5<br>5.5 | $\mu\text{s}$    |
| $\eta_{\text{CSW-EXT}}$             | Number of Buffer Switching Cycle to Recover $I_{\text{DD-OP}}$ when IC Exits from Green mode.           | Number of switching with $V_{\text{D1}} > V_{\text{TH-HGH}}$ to exit $\text{GREEN1}$ . Excluding ALFP and ALGP                                                                                                                                                                                         |            | 4                            |            | cycle            |
| <b>PROTECTION SECTION</b>           |                                                                                                         |                                                                                                                                                                                                                                                                                                        |            |                              |            |                  |
| $V_{\text{SRCINV}}$                 | Threshold Voltage of Current Inversion Detection (Note 7)                                               | $\text{LLD} = 0$<br>$\text{LLD} \geq 1$ , Virtual $V_{\text{TH-OFF}}$                                                                                                                                                                                                                                  |            | 0<br>$V_{\text{TH-OFF}}$     |            | mV               |
| $t_{\text{INV}}$                    | Debounce Time of SR Current Inversion Detection (Note 7)                                                | $V_{\text{GATE1/2}} > 4.5\text{ V}$ & $V_{\text{D1/2}} > V_{\text{SRCINV}}$ for $t_{\text{INV}}$ in AHD, AHJ, ALFP, ALGP in ALC, ALK, ALL, BLC in ALS                                                                                                                                                  |            | 170<br>320<br>520            |            | ns               |
| $V_{\text{SD-PRI}}$                 | Drain Threshold Voltage for Primary Shutdown Protection (Note 7)                                        | $V_{\text{GATE1/2}} > 4.5\text{ V}$ with 200 ns delay & $V_{\text{D1/2}} > V_{\text{SD-PRI}}$ when $\text{DLY\_EN} = 0$ .<br>$V_{\text{GATE1/2}} > 4.5\text{ V}$ with 100 ns delay & $V_{\text{D1/2}} > V_{\text{SD-PRI}}$ when $\text{DLY\_EN} = 1$ . in AHD, AHJ in ALC, ALK, BLC, ALFP, ALGP in ALS |            | 100<br>150<br>200<br>500     |            | mV               |
| $K_{\text{SD-PRI}}$                 | Detection Window Time Ratio based on $t_{\text{VG1}}(n-1)$ for the Primary Shutdown Protection (Note 7) | $\text{LLD} = 0$ , $t_{\text{VG1}}(n-1) = 8\text{ }\mu\text{s}$ , and $K_{2\text{ND-TOFF}} * t_{\text{VG1}}(n-1) > t_{\text{MIN-ON}}$ .<br>If $K_{2\text{ND-TOFF}} * t_{\text{VG1}}(n-1) < t_{\text{MIN-ON}}$ , $t_{\text{VG1-70}} = t_{\text{MIN-ON}}$ .                                              | 65         | 70                           | 75         | %                |
| $V_{\text{ABN-VD}}$                 | Drain Threshold Voltage to Trigger Abnormal VD Sensing Protection (Note 7)                              | $V_{\text{D1/2}} > V_{\text{ABN-VD}}$ & $V_{\text{GATE1/2}} > 4.5\text{ V}$ with 100 ns delay within $K_{\text{SD-PRI}}$ .<br>$V_{\text{ABN-VD}} = V_{\text{TH-HGH}}$ in AHD, AHJ, ALC, ALK, ALL, BLC, ALFP, ALGP in ALS                                                                               |            | 0.85<br>1.5                  |            | V                |
| $T_{\text{OTP1}}$                   | Over Temperature Protection Reducing $V_{\text{GATE}}$ (Note 7)                                         | $T_J > T_{\text{OTP1}}$ & $V_{\text{GATE}} = 6.7\text{ V}$ in AHJ, ALC, BLC in AHD, ALK, ALL, ALS, ALFP, ALGP                                                                                                                                                                                          |            | 105<br>130                   |            | $^\circ\text{C}$ |
| $T_{\text{OTP2}}$                   | Over Temperature Protection Stopping Gate Operation (Note 7)                                            | $T_J > T_{\text{OTP2}}$ & No gate output in AHJ, ALC, BLC in AHD, ALK, ALL, ALS, ALFP, ALGP                                                                                                                                                                                                            |            | 140<br>Disable               |            | $^\circ\text{C}$ |

# NCP4318

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = 12\text{ V}$  and  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$  unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### PROTECTION SECTION

|               |                                                     |                                               |  |    |  |                  |
|---------------|-----------------------------------------------------|-----------------------------------------------|--|----|--|------------------|
| $T_{OTP-RST}$ | Reset Level of Over Temperature Protection (Note 7) | $T_J < T_{OTP-RST}$ , OTP1 and OTP2 are reset |  | 80 |  | $^\circ\text{C}$ |
|---------------|-----------------------------------------------------|-----------------------------------------------|--|----|--|------------------|

### GATE DRIVER SECTION

|                   |                                                                  |                                                                                                                                                            |     |        |     |               |
|-------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--------|-----|---------------|
| $V_{GATE-MAX}$    | Gate Clamping Voltage (Note 7)                                   | $12\text{ V} < V_{DD} < 33\text{ V}$ , $C_{GATE} = 4.7\text{ nF}$ at $T_J < T_{OTP1}$                                                                      | 9   | 10.5   | 12  | V             |
| $V_{GATE-MAX-6V}$ | Gate Clamping Voltage for Adaptive Gate Voltage Control (Note 7) | $V_{DD} = 12\text{ V}$ , $C_{GATE} = 4.7\text{ nF}$ in ALC, BLC                                                                                            | 5.0 | 6.7    | 8.2 | V             |
| $t_{HFS-EN}$      | Adaptive Gate Control Enabling Switching Period (Note 7)         | The time duration from $V_{GATE1(n-1)}$ rising edge to $V_{GATE1(n)}$ rising edge at $T_J < T_{OTP1}$ . in ALC, ALK, ALL, ALS, BLC, ALFP, ALGP in AHD, AHJ | 4   | 5<br>4 | 6.1 | $\mu\text{s}$ |
| $I_{SOURCE}$      | Peak Sourcing Current of Gate Driver (Note 7)                    |                                                                                                                                                            |     | 1.5    |     | A             |
| $I_{SINK}$        | Peak Sinking Current of Gate Driver (Note 7)                     |                                                                                                                                                            |     | 4.5    |     | A             |
| $R_{DRV-SOURCE}$  | Gate Driver Sourcing Resistance (Note 7)                         |                                                                                                                                                            |     | 8      |     | $\Omega$      |
| $R_{DRV-SINK}$    | Gate Driver Sinking Resistance (Note 7)                          |                                                                                                                                                            |     | 1.5    |     | $\Omega$      |
| $t_R$             | Rise Time                                                        | $V_{DD} = 12\text{ V}$ , $C_{GATE} = 3.3\text{ nF}$ , $V_{GATE} = 1 \rightarrow 6\text{ V}$ at $T_J = 25^\circ\text{C}$                                    |     | 50     | 150 | ns            |
| $t_F$             | Fall Time                                                        | $V_{DD} = 12\text{ V}$ , $C_{GATE} = 3.3\text{ nF}$ , $V_{GATE} = 6 \rightarrow 1\text{ V}$ at $T_J = 25^\circ\text{C}$                                    |     | 30     | 50  | ns            |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

7. Not tested but guaranteed by design

8. In ALFP, GATE signal is always turned off by the VTH-OFF-RST threshold, regardless of dead time. IOFFSET will stay at 0.



# NCP4318

## IC OPTIONS

| Option      | Drain Sensing Pin | Frequency | DLY_EN      | V <sub>GATE</sub>   | t <sub>GATE-LIM</sub> | T <sub>OTP1</sub> / T <sub>OTP2</sub> |
|-------------|-------------------|-----------|-------------|---------------------|-----------------------|---------------------------------------|
| NCP4318AHD  | #4, #6            | H-version | Variable    | 1-Level (10 V)      | Disable               | 130°C / Disable                       |
| NCP4318AHJ  | #4, #6            | H-version | Variable    | 1-Level (10 V)      | Disable               | 105°C / 140°C                         |
| NCP4318ALC  | #4, #6            | L-version | Variable    | 2-Level (10 V, 6 V) | Disable               | 105°C / 140°C                         |
| NCP4318BLC  | #3, #6            | L-version | Variable    | 2-Level (10 V, 6 V) | Disable               | 105°C / 140°C                         |
| NCP4318ALK  | #4, #6            | L-version | Variable    | 1-Level (10 V)      | Disable               | 130°C / Disable                       |
| NCP4318ALL  | #4, #6            | L-version | Variable    | 1-Level (10 V)      | Disable               | 130°C / Disable                       |
| NCP4318ALS  | #4, #6            | L-version | Always High | 1-Level (10 V)      | Disable               | 130°C / Disable                       |
| NCP4318ALFP | #4, #6            | L-version | Variable    | 1-Level (10 V)      | Disable               | 130°C / Disable                       |
| NCP4318ALGP | #4, #6            | L-version | Variable    | 1-Level (10 V)      | Disable               | 130°C / Disable                       |

| Option      | t <sub>INV</sub> (ns) | t <sub>ON-DLY2</sub> (ns) | Dead-time Regulation | t <sub>DEAD-LBAND</sub> (ns) | t <sub>OFF-MIN</sub> (μs) | t <sub>GATE-SKIP1</sub> (ns) / t <sub>GATE-SKIP2</sub> (ns) | t <sub>GRN1-ENT</sub> (μs) / t <sub>GRN2-ENT</sub> (μs) | f <sub>HFS-EN</sub> (kHz) |
|-------------|-----------------------|---------------------------|----------------------|------------------------------|---------------------------|-------------------------------------------------------------|---------------------------------------------------------|---------------------------|
| NCP4318AHD  | 170                   | 240                       | Enable               | 170                          | 1.15                      | 550 / 385                                                   | 40 / 4                                                  | 250                       |
| NCP4318AHJ  | 170                   | 240                       | Enable               | 170                          | 1.15                      | 550 / 385                                                   | 40 / 4                                                  | 250                       |
| NCP4318ALC  | 320                   | 240                       | Enable               | 90                           | 2                         | 710 / 510                                                   | 60 / 6                                                  | 200                       |
| NCP4318BLC  | 320                   | 240                       | Enable               | 90                           | 2                         | 710 / 510                                                   | 60 / 6                                                  | 200                       |
| NCP4318ALK  | 320                   | 240                       | Enable               | 90                           | 2                         | 710 / 510                                                   | 60 / 6                                                  | 200                       |
| NCP4318ALL  | 320                   | 240                       | Enable               | 90                           | 2                         | 710 / 510                                                   | 60 / 6                                                  | 200                       |
| NCP4318ALS  | 520                   | 240                       | Enable               | 90                           | 0.8                       | 710 / 510                                                   | 60 / 6                                                  | 200                       |
| NCP4318ALFP | 170                   | 240                       | Disable              | 90                           | 2                         | 710 / 510                                                   | n.a. / 6                                                | 200                       |
| NCP4318ALGP | 170                   | 240                       | Enable               | 90                           | 2                         | 710 / 510                                                   | n.a. / 6                                                | 200                       |

| Option      | V <sub>TH-HGH</sub> (V) | V <sub>TH-OFF</sub> Range (mV) | V <sub>TH-OFF-STEP</sub> (mV) | V <sub>TH-OFF-RST</sub> (mV) | V <sub>SD-PRI</sub> (mV) | K <sub>TON1</sub> (%) / K <sub>TON2</sub> (%) |
|-------------|-------------------------|--------------------------------|-------------------------------|------------------------------|--------------------------|-----------------------------------------------|
| NCP4318AHD  | 0.85                    | -14 ~ 110                      | 4                             | -10                          | 100                      | 52 / 22                                       |
| NCP4318AHJ  | 0.85                    | -14 ~ 110                      | 4                             | -10                          | 100                      | 52 / 22                                       |
| NCP4318ALC  | 0.85                    | -6 ~ 118                       | 4                             | 2                            | 150                      | 52 / 22                                       |
| NCP4318BLC  | 0.85                    | -6 ~ 118                       | 4                             | 2                            | 150                      | 52 / 22                                       |
| NCP4318ALK  | 0.85                    | -6 ~ 242                       | 8                             | 10                           | 150                      | 52 / 22                                       |
| NCP4318ALL  | 0.85                    | -6 ~ 118                       | 4                             | 2                            | 500                      | 52 / 22                                       |
| NCP4318ALS  | 1.5                     | -6 ~ 242                       | 8                             | 10                           | 200                      | 52 / 22                                       |
| NCP4318ALFP | 0.85                    | -14 ~ 110                      | 4                             | -6                           | 150                      | 34 / 17                                       |
| NCP4318ALGP | 0.85                    | -14 ~ 110                      | 4                             | -10                          | 150                      | 34 / 17                                       |

9.  $f_{HFS-EN} = 1 / t_{HFS-EN}$ .

TYPICAL PERFORMANCE CHARACTERISTICS

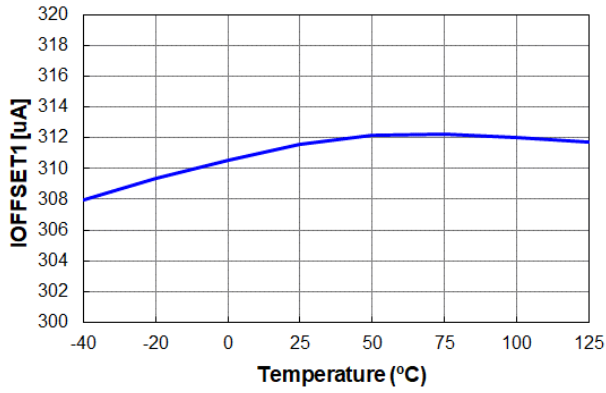


Figure 3.  $I_{\text{OFFSET1}}$  vs. Temperature

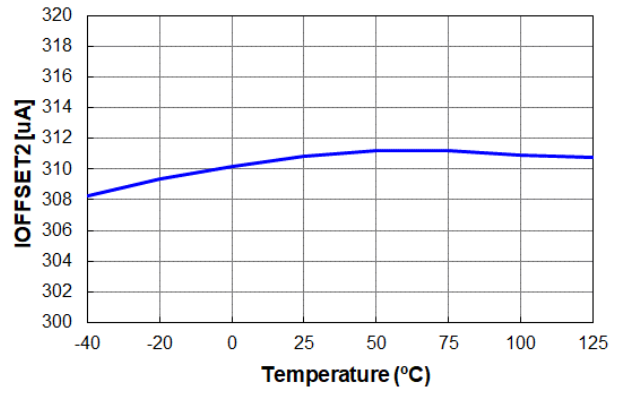


Figure 4.  $I_{\text{OFFSET2}}$  vs. Temperature

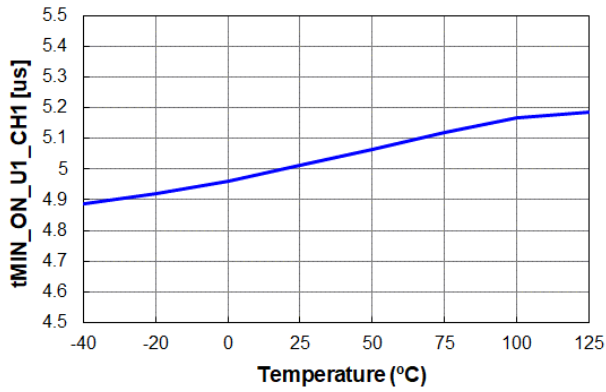


Figure 5.  $t_{\text{MIN-ON-U1-CH1}}$  vs. Temperature

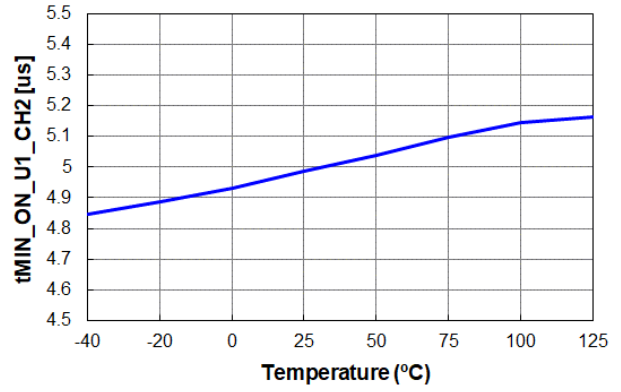


Figure 6.  $t_{\text{MIN-ON-U1-CH2}}$  vs. Temperature

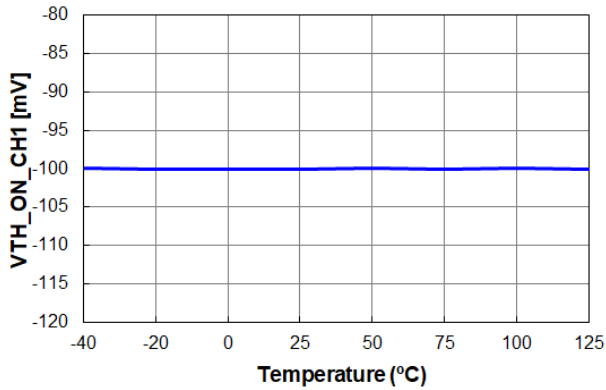


Figure 7.  $V_{\text{TH-ON-CH1}}$  vs. Temperature

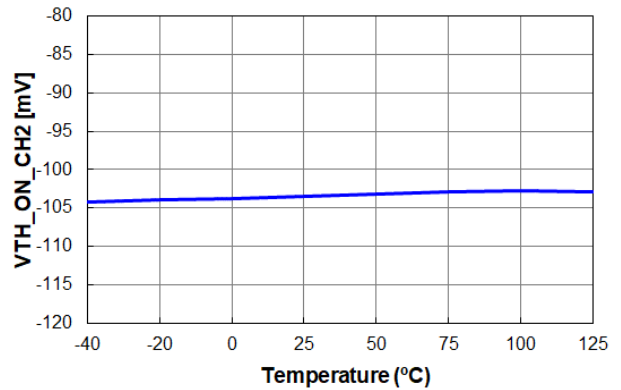


Figure 8.  $V_{\text{TH-ON-CH2}}$  vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

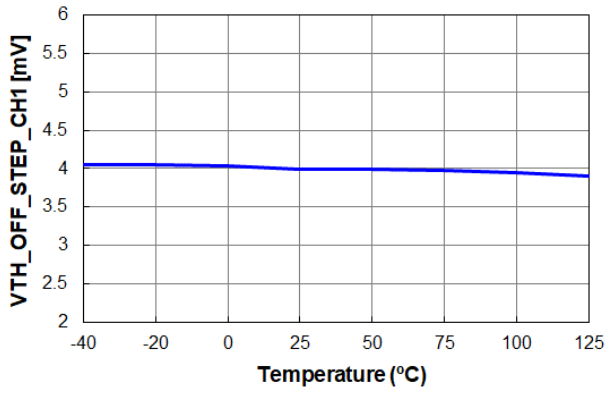


Figure 9. V<sub>TH-OFF-STEP-CH1</sub> vs. Temperature

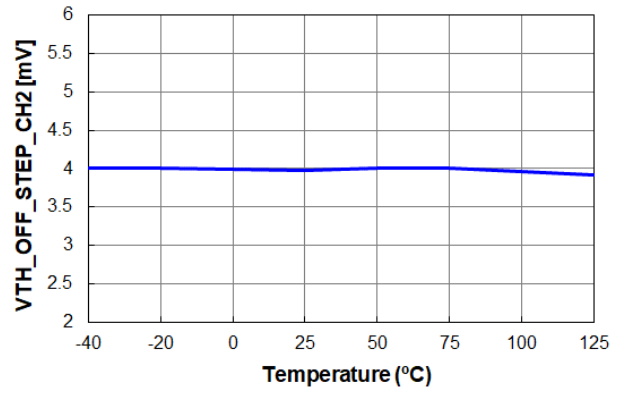


Figure 10. V<sub>TH-OFF-STEP-CH2</sub> vs. Temperature

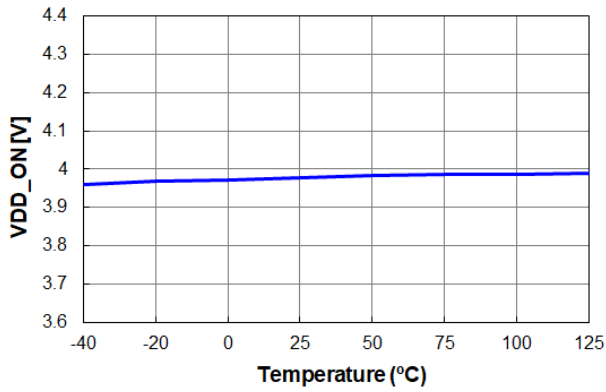


Figure 11. V<sub>DD-ON</sub> vs. Temperature

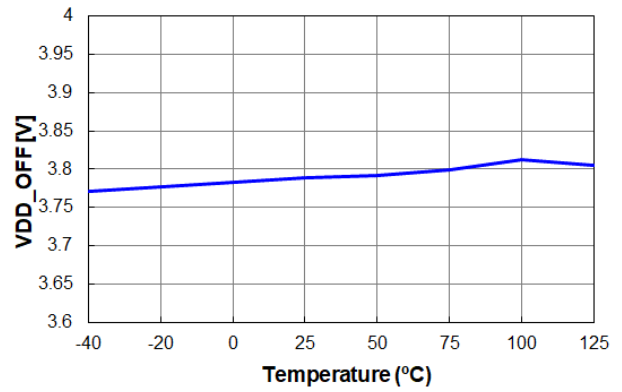


Figure 12. V<sub>DD-OFF</sub> vs. Temperature

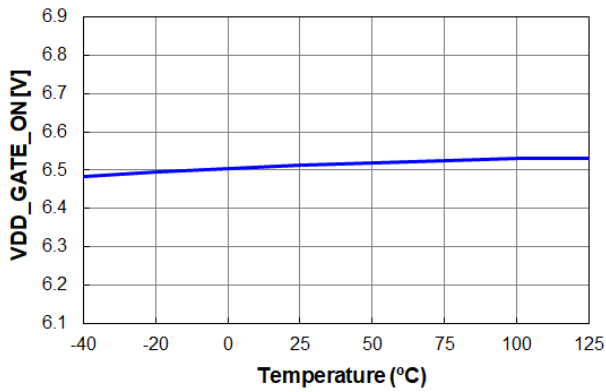


Figure 13. V<sub>DD-GATE-ON</sub> vs. Temperature

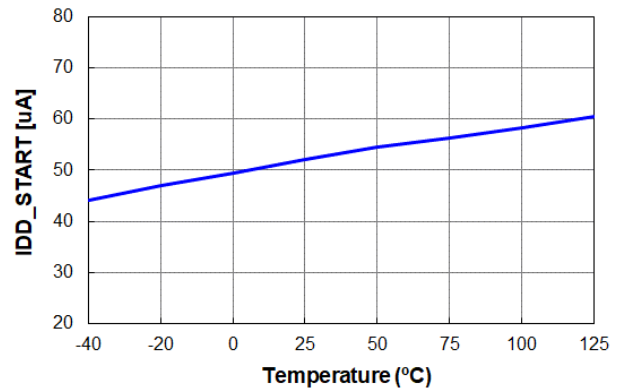


Figure 14. I<sub>DD-START</sub> vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

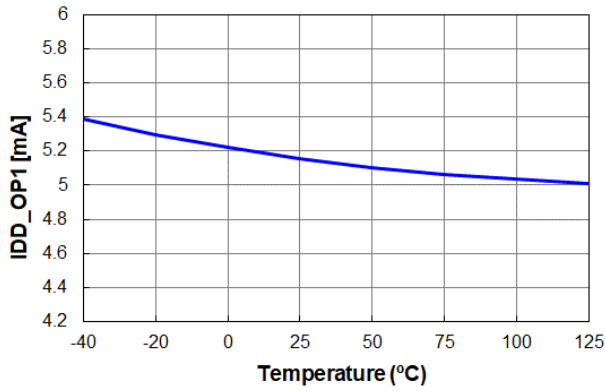


Figure 15. I<sub>DD-OP1</sub> vs. Temperature

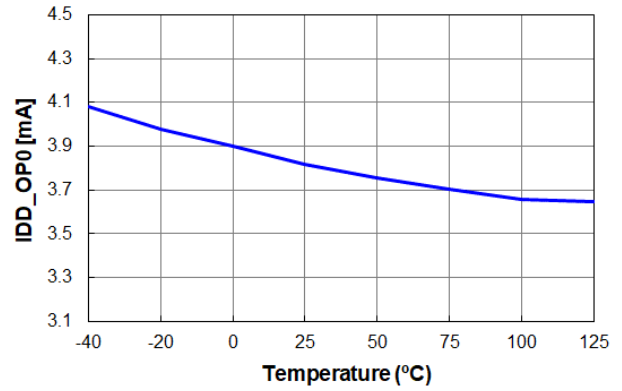


Figure 16. I<sub>DD-OP0</sub> vs. Temperature

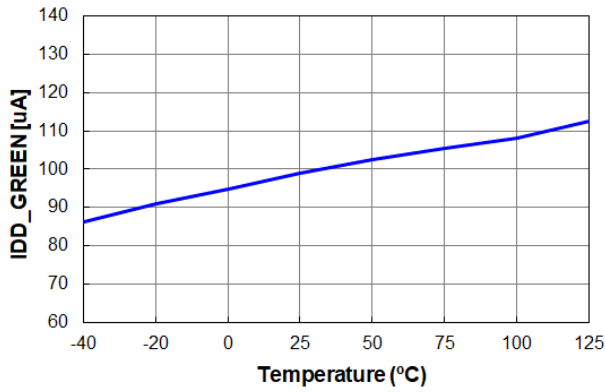


Figure 17. I<sub>DD-GREEN</sub> vs. Temperature

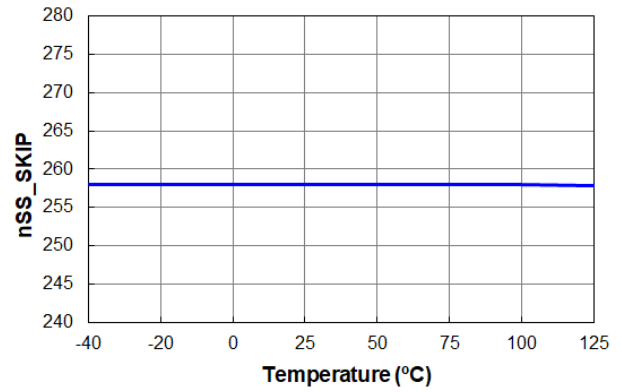


Figure 18. n<sub>SS-SKIP</sub> vs. Temperature

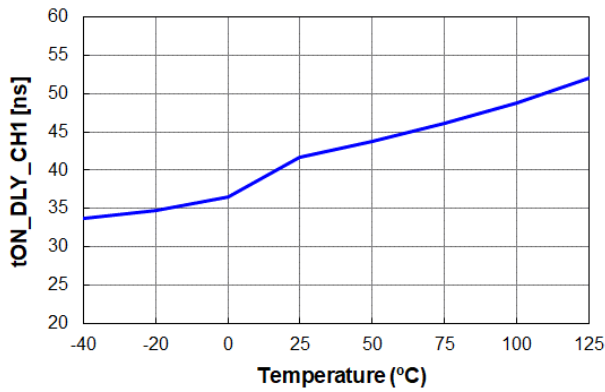


Figure 19. t<sub>ON-DLY-CH1</sub> vs. Temperature

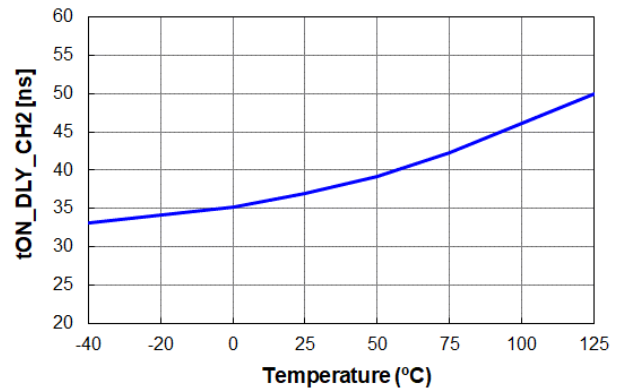


Figure 20. t<sub>ON-DLY-CH2</sub> vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

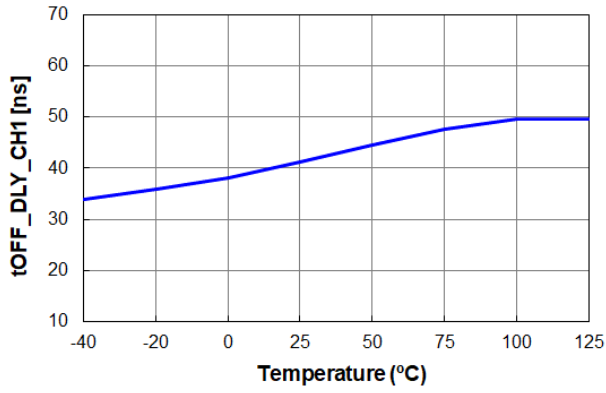


Figure 21.  $t_{OFF-DLY-CH1}$  vs. Temperature

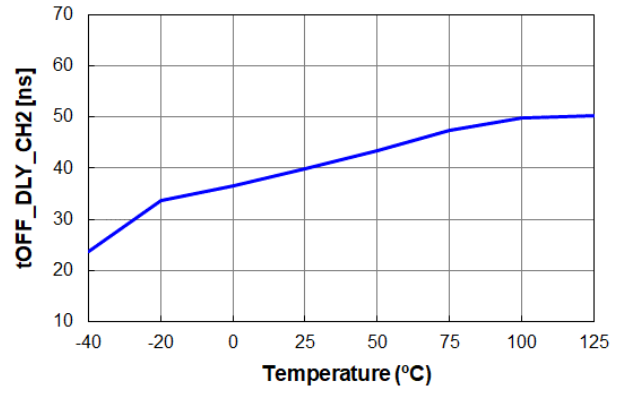


Figure 22.  $t_{OFF-DLY-CH2}$  vs. Temperature

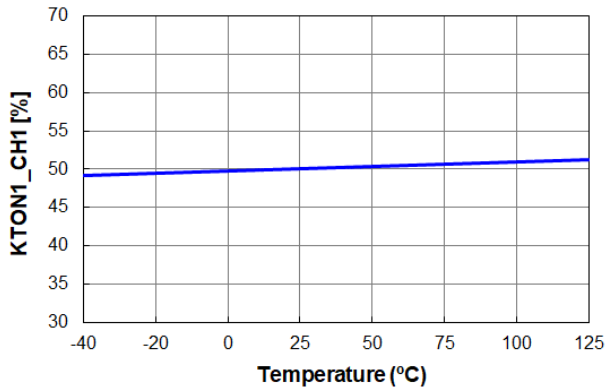


Figure 23.  $K_{TON1-CH1}$  vs. Temperature

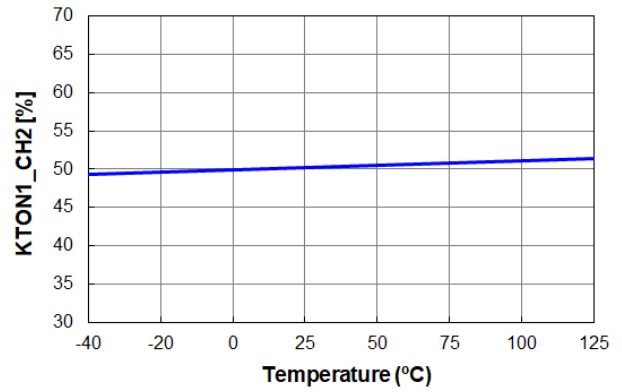


Figure 24.  $K_{TON1-CH2}$  vs. Temperature

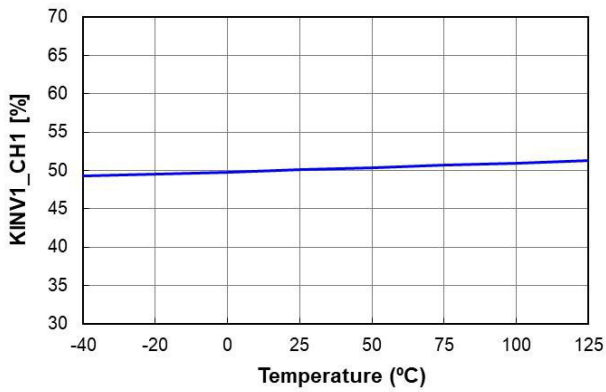


Figure 25.  $K_{INV1-CH1}$  vs. Temperature

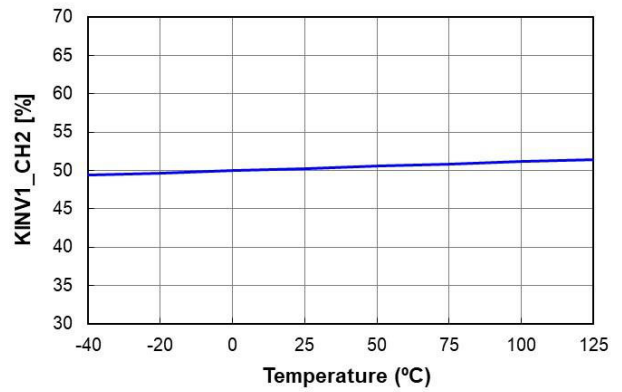


Figure 26.  $K_{INV1-CH2}$  vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

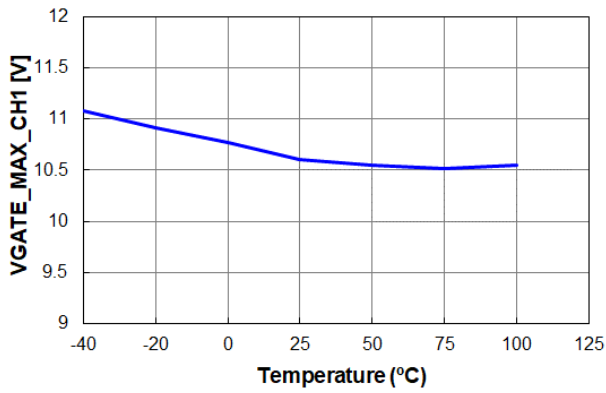


Figure 27. V<sub>GATE-MAX-CH1</sub> vs. Temperature

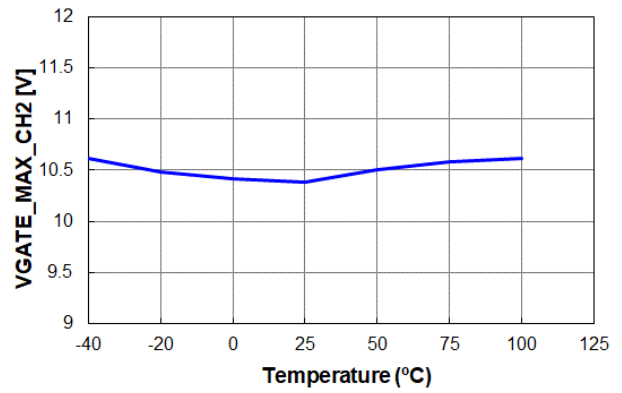


Figure 28. V<sub>GATE-MAX-CH2</sub> vs. Temperature

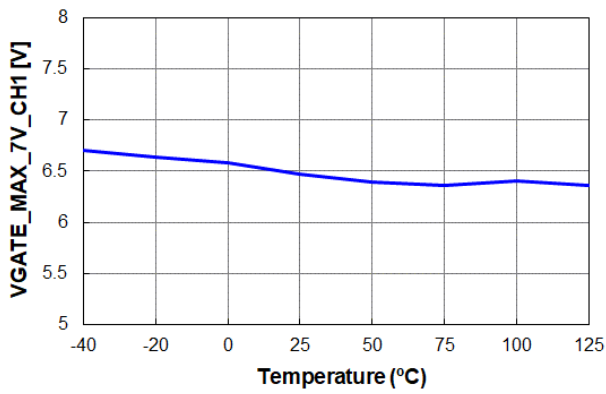


Figure 29. V<sub>GATE-MAX-7V-CH1</sub> vs. Temperature

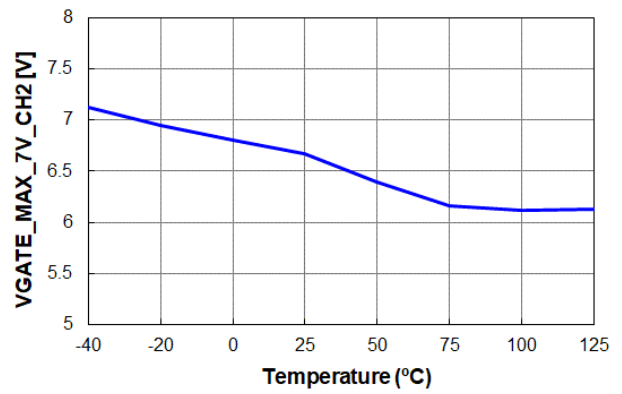


Figure 30. V<sub>GATE-MAX-7V-CH2</sub> vs. Temperature

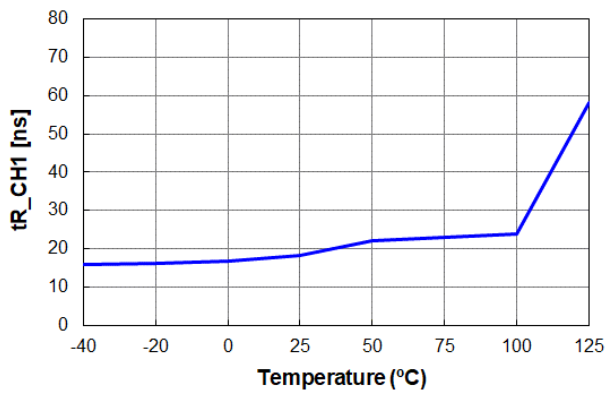


Figure 31. t<sub>R-CH1</sub> vs. Temperature

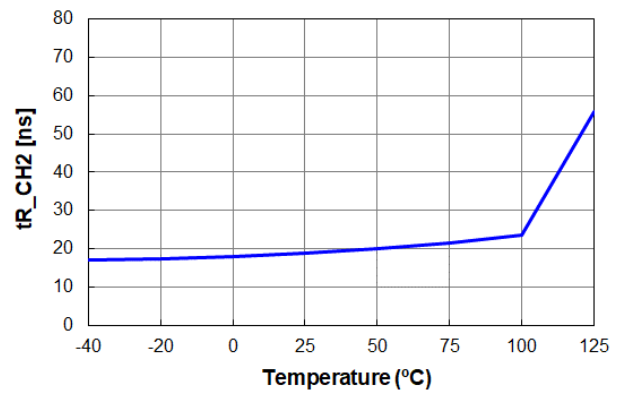


Figure 32. t<sub>R-CH2</sub> vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

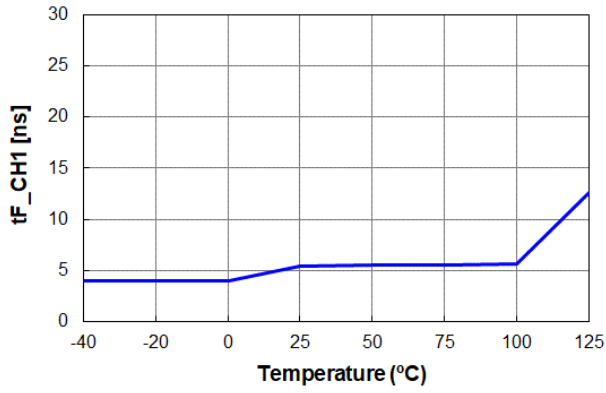


Figure 33.  $t_{F-CH1}$  vs. Temperature

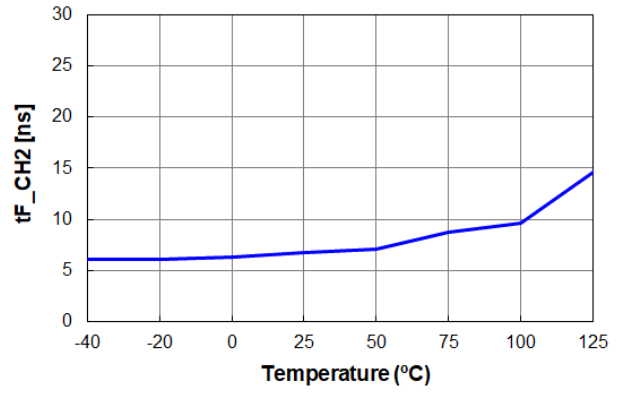


Figure 34.  $t_{F-CH2}$  vs. Temperature

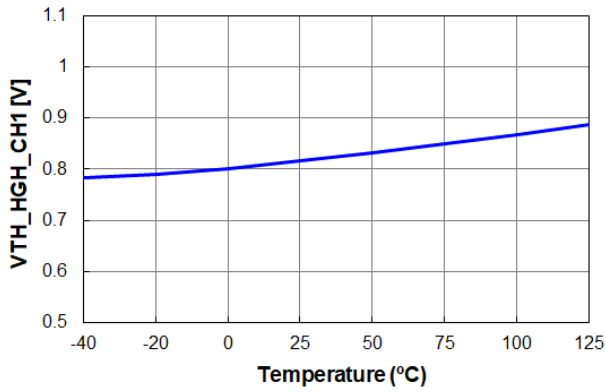


Figure 35.  $V_{TH-HIGH-CH1}$  vs. Temperature

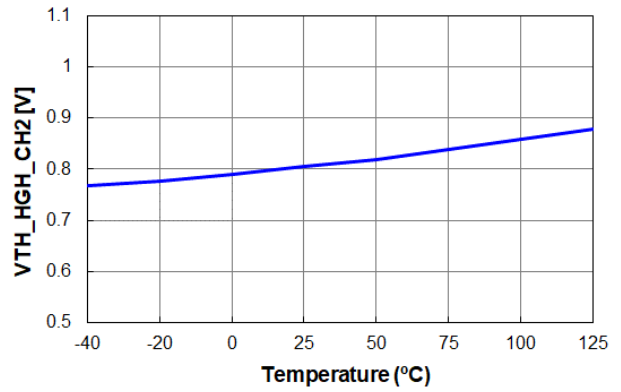


Figure 36.  $V_{TH-HIGH-CH2}$  vs. Temperature

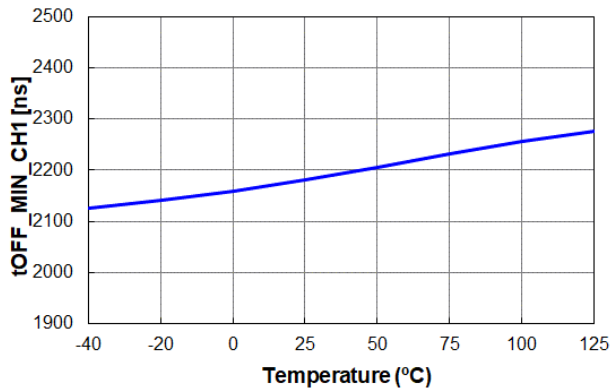


Figure 37.  $t_{OFF-MIN-CH1}$  vs. Temperature

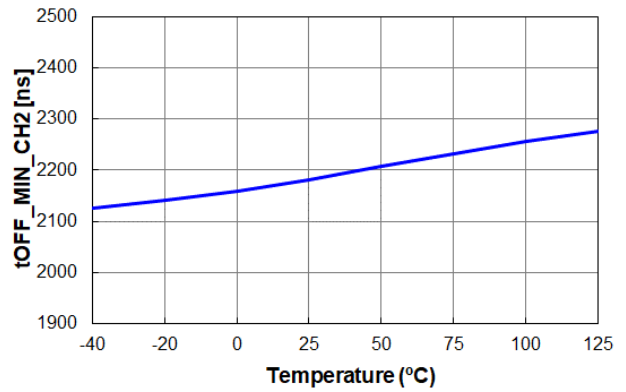


Figure 38.  $t_{OFF-MIN-CH2}$  vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

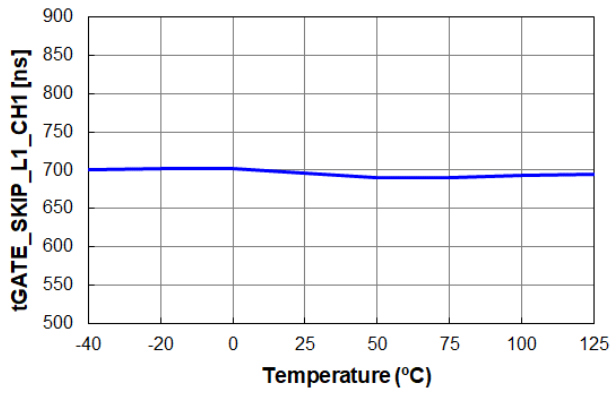


Figure 39. t<sub>GATE\_SKIP1-CH1</sub> vs. Temperature

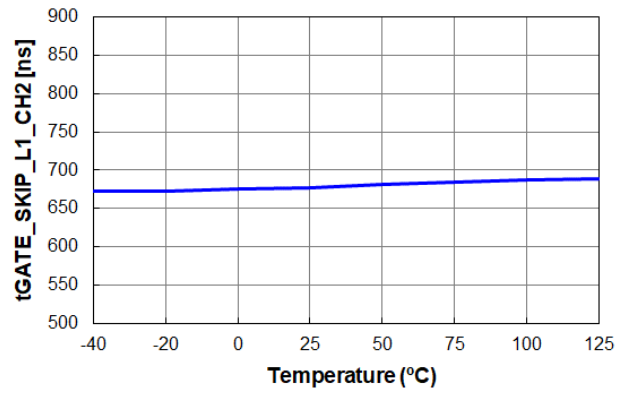


Figure 40. t<sub>GATE\_SKIP1-CH2</sub> vs. Temperature

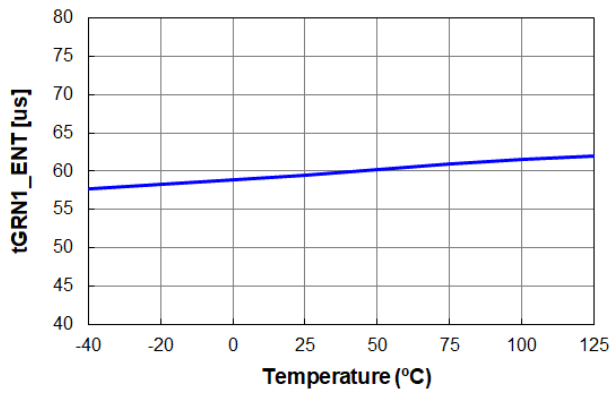


Figure 41. t<sub>GRN1-ENT</sub> vs. Temperature

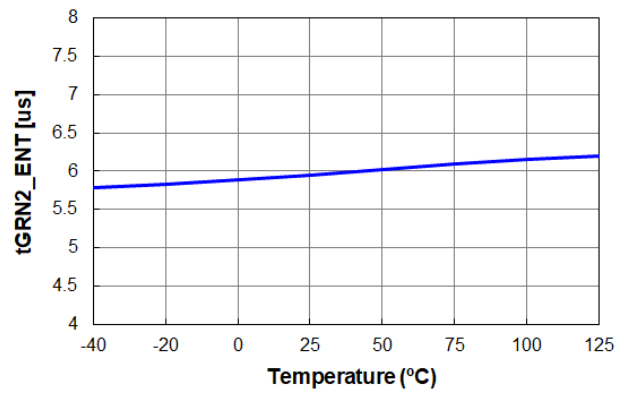


Figure 42. t<sub>GRN2-ENT</sub> vs. Temperature



## APPLICATIONS INFORMATION

## Basic Operation Principle

NCP4318 controls the SR MOSFETs based on the instantaneous drain-to-source voltage sensed across the drain and source pins of the MOSFET. Before SR gate turning on, SR body diode operates as the conventional diode rectifier. Referring to Figure 46, the conducting body diode makes the drain-to-source voltage drops below the turn-on threshold voltage  $V_{TH-ON}$  and triggers the turn-on of the SR gate. After the SR gate turning on, the product of on resistance  $R_{DS-ON}$  of the SR MOSFET and the instantaneous SR current determines the drain-to-source voltage.

When the drain-to-source voltage reaches the turn-off threshold voltage  $V_{TH-OFF}$ , as SR MOSFET current decreases to near zero, NCP4318 turns off the gate. If SR dead time is larger or smaller than the dead time regulation target, NCP4318 adaptively changes a virtual turn-off threshold voltage to regulate the dead time between  $t_{DEAD-LBAND}$  and  $t_{DEAD-HBAND}$ , so to maximize system efficiency.

## SR Turn-on Algorithm

When  $V_D$  is lower than  $V_{TH-ON}$  by body diode conduction of SR MOSFET, turn-on comparator *COM1* toggles high. If an additional delay flag signal *DLY\_EN* is low, *VG* goes high with only 30 ns of  $t_{ON-DLY}$  and GATE sources 1.5 A of  $I_{SOURCE}$  to turn on the SR MOSFET.

On the other hand, if the *DLY\_EN* flag is HIGH due to current inversion detection *SRCINV* or green-mode preparation *GREEN2*, additional turn-on delay is applied by an adaptive turn-on delay block. In this case, SR gate is turned on when the body diode conduction time is confirmed to be longer than  $t_{ON-DLY2}$ .

## SR Turn-off Algorithm

The SR turn-off method determines safe and stable SR operation. One of the conventional methods turns off the SR gate based on the instantaneous drain voltage (present information). This method is widely used and easy to realize, and it can prevent late turn-off with appropriate turn-off threshold voltage. However, it frequently shows premature turn-off due to parasitic stray inductances of PCB trace and package of the SR MOSFET. On the other hand, SR gate on-time is predicted by inspecting previous-cycle drain voltage information. It can prevent the premature turn-off, providing good performance for the system with constant operating frequency and SR conduction duration. However, in case of the frequency changing, the on-time prediction may lead to late turn-off during frequency increasing event, leading to negative current flowing in the secondary side of the LLC converter.

To gain the advantages of both methods, NCP4318 adopts a mixed type turn-off algorithm, which modulate a virtual turn-off threshold voltage ( $V_{TH-OFF}$ ) to regulate the turn-off dead time within a hysteresis band. As shown in

Figure 45, the instantaneous drain voltage  $V_D$  is compared with a virtual  $V_{TH-OFF}$  to turn off the SR gate. The virtual  $V_{TH-OFF}$  is adaptively changed to compensate the effect of stray inductance and regulate a  $t_{DEAD}$  between  $t_{DEAD-LBAND}$  and  $t_{DEAD-HBAND}$ . Therefore, NCP4318 can show robust operation with very small dead time.

The response time of the  $V_{TH-OFF}$  comparator is around 10–20 ns at room temperature, meaning  $V_{VD} - V_{VS}$  needs to be higher than  $V_{TH-OFF}$  for more than 20 ns to guarantee turning-off of GATE signal. The total delay time of the turning-off,  $t_{OFF-DLY}$ , includes this response time and propagation delay of the gate-drive logic/circuit.

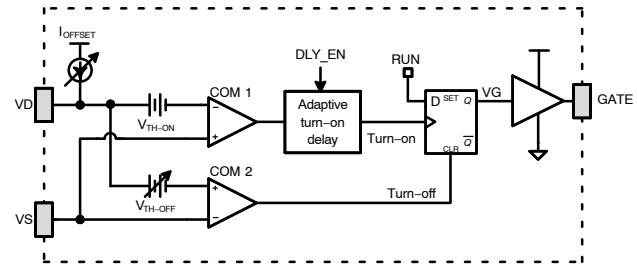


Figure 43. VDS-sensing Circuit

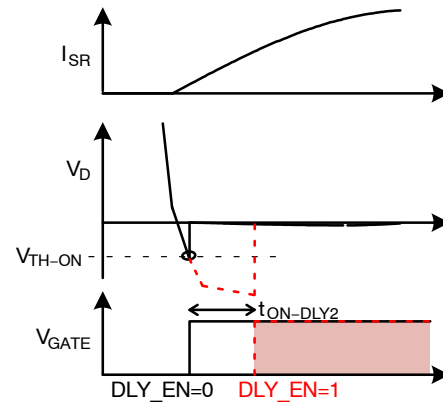


Figure 44. SR Turn-on Algorithm

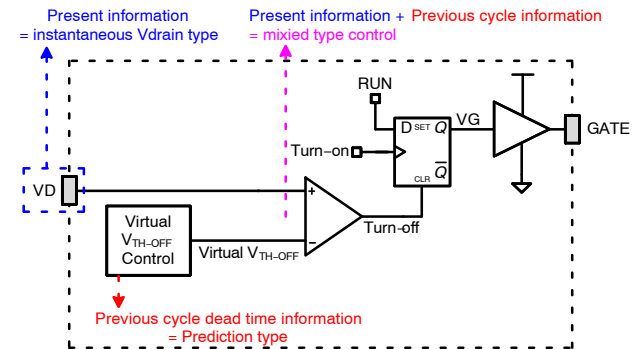


Figure 45. SR Turn-off Algorithm

### Hysteresis-Band Dead-Time Regulation

The stray inductance of SR MOSFET induces a positive offset voltage across drain and source when the SR current decreases. This makes drain-to-source voltage of SR MOSFET higher than the product of  $R_{DS-ON}$  and the instantaneous SR current, which results in premature SR turn-off as shown in Figure 46 (a). The induced offset voltage changes as the output load varying, so, to keep a fixed SR dead time, the turn-off threshold voltage needs to be tuned. NCP4318 utilizes the virtual  $V_{TH-OFF}$ , which is comprised of 31 steps of turn-off threshold voltages  $V_{TH-OFF(n)}$  and 31 steps of offset current  $I_{OFFSET(n)}$  as shown in Figure 46 (b) and Figure 47. The turn-off condition and the virtual turn-off threshold voltage can be expressed as:

$$V_{DS} + I_{OFFSET} \cdot R_{OFFSET} - V_{TH-OFF} = 0 \quad (\text{eq. 1})$$


$$\text{Virtual } V_{TH-OFF} = V_{TH-OFF} - R_{OFFSET} \cdot I_{OFFSET} \quad (\text{eq. 2})$$

where  $R_{OFFSET}$  is the external drain sensing resistance.


$V_{TH-OFF}$  modulates between  $V_{TH-OFF-MIN}$  and  $V_{TH-OFF-MAX}$  with a step size of  $V_{TH-OFF-STEP}$ , and  $I_{OFFSET}$  varies between 0 and 310  $\mu\text{A}$  with 10  $\mu\text{A}$  of step size.  $I_{OFFSET}$  means to provide a finer tuning on the virtual  $V_{TH-OFF}$ . When the  $I_{OFFSET}$  has saturated to maximum or minimum values,  $V_{TH-OFF}$  changes to its next step for a coarse control. So, designing the  $R_{OFFSET}$  resistance as  $V_{TH-OFF-STEP} / 310 \mu\text{A}$  gives a linear virtual  $V_{TH-OFF}$  sweeping range. Typically, 30  $\Omega$   $R_{OFFSET}$  is used when  $V_{TH-OFF-STEP}$  is 8 mV, and 15  $\Omega$  for 4 mV.

Dead time is defined as the duration from  $V_{GATE}$  turning off to VD exceeding  $V_{TH-HGH}$ .  $V_{GATE}$  turning off is defined as the moment that voltage on GATE1/GATE2 pin is crossing a  $V_{GATE-LOW}$  threshold by falling.  $V_{GATE-LOW}$  is 3.7 V in general, but it is 2.8 V for IC options with 5 V  $V_{GATE}$  or 3-level  $V_{GATE}$ .

In Figure 48 (a), the measured dead time  $t_{DEAD}$  is larger than upper band of  $t_{DEAD-HBAND}$ . To reduce  $t_{DEAD}$ , the virtual  $V_{TH-OFF}$  will increased by one-step decrease of  $I_{OFFSET}$  within 128 switching cycles. As a result,  $t_{DEAD}$  decreases and becomes much closer to  $t_{DEAD-HBAND}$ , as shown in Figure 48 (b).

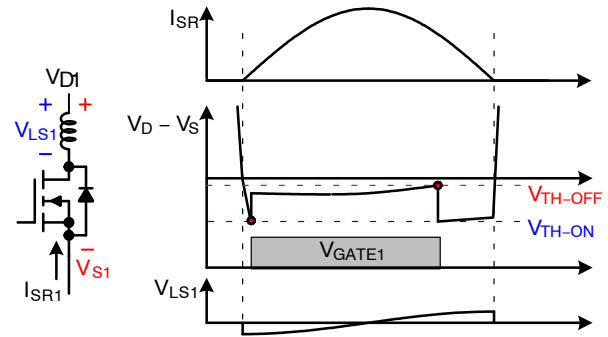

(a) Premature SR Turn-off by Stray Inductance

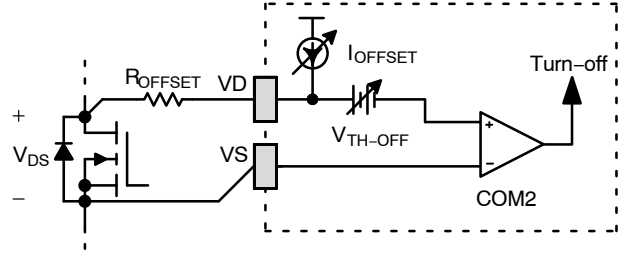

(b) Detailed SR Turn-off Circuitry

**Figure 46. Virtual  $V_{TH-OFF}$**

Similarly, when the dead time is shorter than  $t_{DEAD-LAND}$ , the virtual  $V_{TH-OFF}$  will reduce in the following switching cycle. When the dead time is placed between  $t_{DEAD-LBAND}$  and  $t_{DEAD-HBAND}$  as in Figure 49, the virtual  $V_{TH-OFF}$  stays as-is. Therefore, the dead time is regulated between  $t_{DEAD-LBAND}$  and  $t_{DEAD-HBAND}$  regardless of parasitic inductances. This hysteresis-band dead-time control provides stable operation across load variation by minimizing the variation of the dead time.

The initial and reset condition of the virtual  $V_{TH-OFF}$  is  $V_{TH-OFF} = V_{TH-OFF-RST}$  and  $I_{OFFSET} = 310 \mu\text{A}$ .

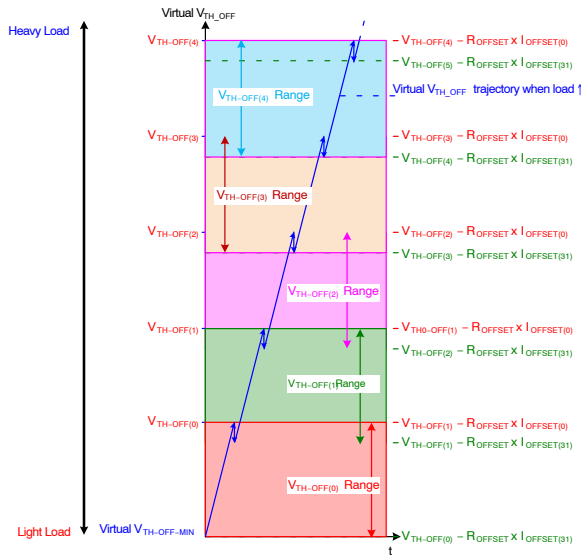


Figure 47. Virtual  $V_{TH-OFF}$  Trajectory when Load Increases

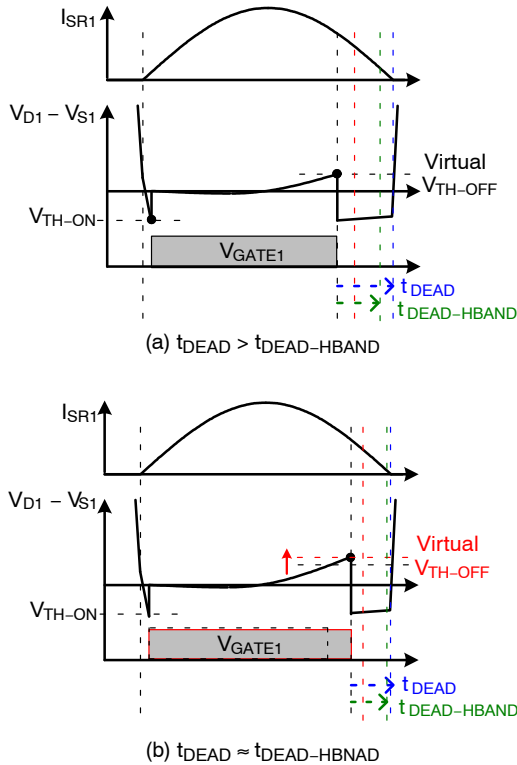


Figure 48. Dead-time Regulation

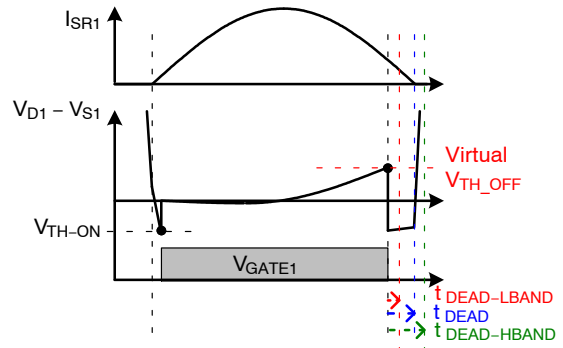


Figure 49.  $t_{DEAD} \in [t_{DEAD-LBAND}, t_{DEAD-HBAND}]$

### Light Load Detection (LLD)

When the output load increases, due to larger current amplitude in the SR current, the dead-time regulation modulates the  $V_{TH-OFF}$  higher. Thus, the  $V_{TH-OFF}$  indicates the output load condition.

There are totally 31 steps of  $V_{TH-OFF}$ , noted as  $V_{TH-OFF(0)} \sim V_{TH-OFF(31)}$ . When the output load increases, by the dead-time regulation,  $V_{TH-OFF}$  tends to increase. When  $V_{TH-OFF}$ 's step number  $n \leq \eta_{LLD1}$  on channel 1, NCP4318 detects a light load condition. So, light load detection flag signal  $LLD$  set to '1'. When the load keeps reducing, making  $n \leq \eta_{LLD2}$ ,  $LLD$  is set to '2'. At heavier load and  $n > \eta_{LLD1}$ ,  $LLD$  becomes '0'. This  $LLD$  signal is used for  $SRCINV$  detection threshold voltage control and adaptive  $V_{GATE}$  control.




Figure 50.  $V_{TH-OFF}$  Steps and the LLD Flag ( $\eta_{LLD1} = 7$ ,  $\eta_{LLD2} = 3$ ,  $\eta_{V_{TH-OFF-RST}} = 3$ )

### Advanced Adaptive Minimum Turn-on Time

When SR gate is turning on, there may be severe oscillation in the drain-to-source voltage of the SR MOSFET, which may result in several turn-off mis-triggering as shown in Figure 51. To provide stable SR gate signal without short pulses, it is desirable to have large turn-off blanking time (= minimum turn-on time) until the drain voltage oscillation attenuates. However, too large blanking time results in an inversion current problem under light load condition where the SR conduction time may be shorter than the minimum turn-on time.

To solve this issue, NCP4318 has an adaptive minimum turn-on time,  $t_{MIN-ON}$ , where the turn-off blanking time changes in accordance with the SR conduction time  $t_{SRCOND}(n-1)$  measured in previous switching cycle. The SR conduction time is measured from SR gate rising edge to the drain sensing voltage  $V_D$  being higher than  $V_{TH-HGH}$ .  $t_{MIN-ON}$  in the  $n$ -th switching cycle is defined as 50% of  $t_{SRCOND}(n-1)$  as shown in Figure 52. During  $t_{MIN-ON}$ , SR gate won't be turned off by the virtual  $V_{TH-OFF}$ . The minimum and maximum values of  $t_{MIN-ON}$  are defined as 200 ns and  $t_{MIN-ON-UI}$  respectively. When the additional turn-on delay flag  $DLY\_EN$  is high in the light load condition,  $t_{MIN-ON}$  becomes 20% of  $t_{SRCOND}(n-1)$  as shown in Figure 53.

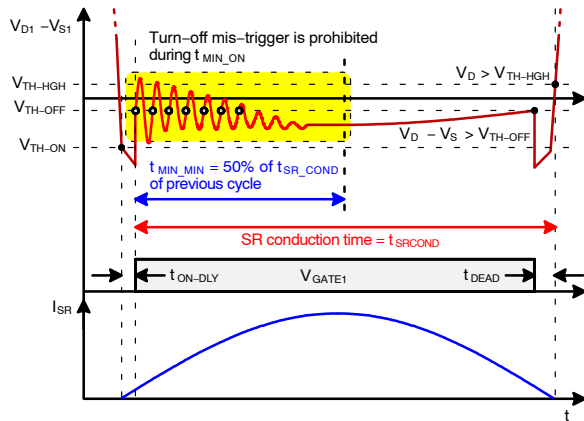


Figure 51. Minimum Turn-on time and Turn-off Mis-triggering

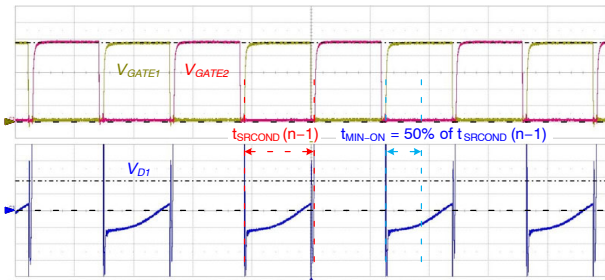


Figure 52. Minimum Turn-on Time  $t_{MIN-ON}$  when  $DLY\_EN=0$

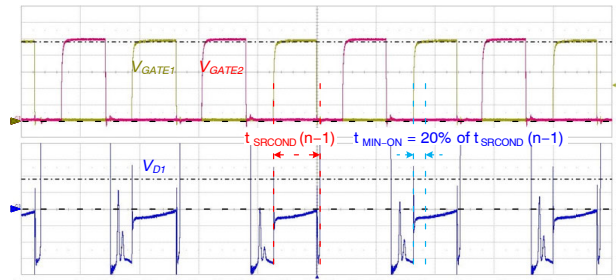


Figure 53. Minimum Turn-on Time  $t_{MIN-ON}$  when  $DLY\_EN=1$

### Multi-step $V_{TH-OFF}$

In heavy-load conditions,  $V_{TH-OFF}$  tends to be high. When the switching frequency on the primary side suddenly increases from the heavy-load condition, the SR current conduction duration reduces accordingly. To make the SR controller timely reacts to this transition, we implements a multi-step  $V_{TH-OFF}$  function to reduce the effective  $V_{TH-OFF}$ , turning off the SR gate earlier, during this transition. Referring to the SR gate on-time of previous switching cycle, before the SR gate on-time reaches 70% ( $K_{2ND-TOFF}$ ) of the previous-cycle on-time, the effective  $V_{TH-OFF}$  is temporarily reduces to 60% ( $K_{2ND-VOFF}$ ) of its real value. Thus, the SR gate can be turned off with a lower  $V_{TH-OFF}$  during the frequency-increasing transition, providing a safer operation. The multi-step  $V_{TH-OFF}$  function is active when  $LLD = 0$ .

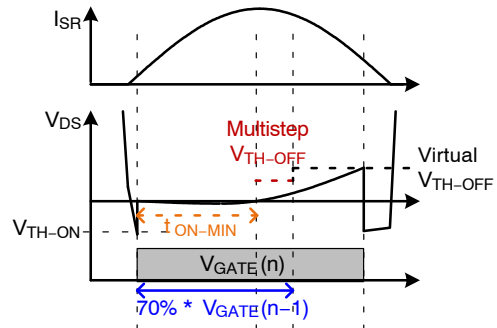


Figure 54.  $t_{DEAD} \in [t_{DEAD-LBAND}, t_{DEAD-HBAND}]$

### Current Inversion Detection

During SR operation, two types of inversion current may occur. First, in light load condition, capacitive current spike causes leading edge inversion current. In heavy load condition, the body diode of SR MOSFET starts conducting right after the primary side switching transition taking place. However, when the resonance-capacitor voltage amplitude is not large enough in light load condition, the voltage across the magnetizing inductance of the transformer is smaller than the reflected output voltage. Thus, the secondary side SR body diode conduction is delayed until the magnetizing inductor voltage builds up to the reflected output voltage.

However, the primary side switching transition can cause capacitive current spike and turn on the body diode of SR MOSFET for a short time as shown in Figure 55, which induces SR turn-on mis-trigger. As a result, the turn-on mis-trigger makes leading edge inversion current in the secondary side.

The second inversion current is trailing edge inversion current caused by excessive SR gate on-time, which is generally due to the minimum on-time  $t_{MIN-ON}$ . If  $t_{MIN-ON}$  is longer than current transferring duration, trailing edge inversion current can happen as shown in Figure 56. If there is no proper algorithm to prevent this inversion current, severe drain voltage spike can happen due to SR MOSFET hard switching.

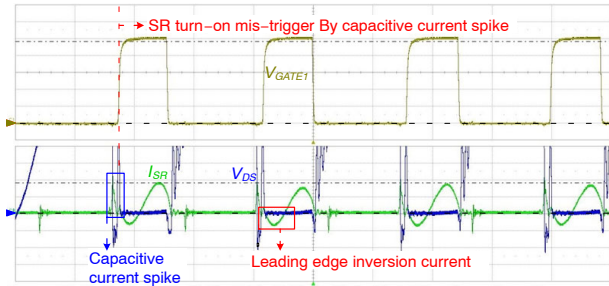


Figure 55. Leading Edge Inversion Current

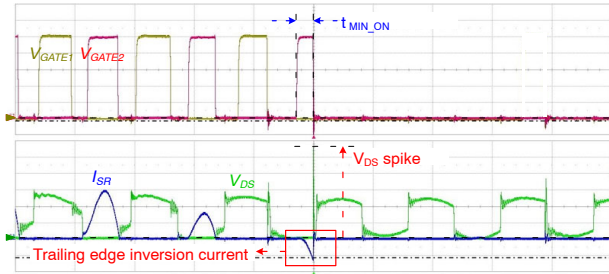


Figure 56. Trailing Edge Inversion Current

To prevent both leading edge and trailing edge inversion currents, NCP4318 has a current inversion detection function *SRCINV*. This function is effective during  $t_{MIN-ON}$ . When the SR gate is turned on and the inversion current occurs, the drain sensing voltage of SR MOSFET becomes a positive value. In this condition, if  $V_{DS}$  is higher than 0 mV for  $t_{INV}$  of the detection confirmation time, *SRCINV* will be triggered and turn off the SR gate immediately. Then, the *DLY\_EN* flag goes high and the turn-on delay is increased to  $t_{ON-DLY2}$  for the following switching cycles.

When the *LLD* flag is high,  $V_{TH-OFF}$  tends to be low, and the  $V_{TH-OFF}$  replaces the 0-mV threshold voltage for *SRCINV*. If the gate on-time is longer than  $t_{MIN-ON}$ , the virtual  $V_{TH-OFF}$  turn-off mechanism will turn off the gate properly.

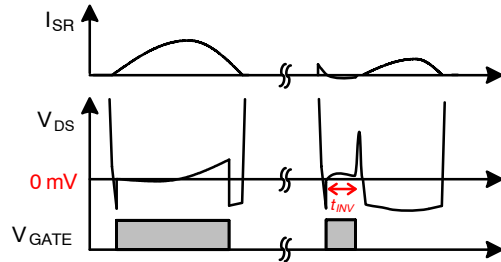


Figure 57. Triggering SRCINV by Leading-edge Inversion Current

#### Green Mode

In NCP4318, there are two stages to trigger *GREEN* function. *GREEN1* is for low power consumption in light load condition, and *GREEN2* is for preparing a *GREEN1* triggering.



When the LLC controller in the primary side operates in skip mode under light load conditions, making  $V_{D1}$  shows no switching waveform for longer than  $t_{GRN1-ENT}$ , the *GREEN1* mode will be activated as shown in Figure 58. Once NCP4318 is in the *GREEN1* mode, all the major functions are disabled to reduce the operating current down to 100  $\mu$ A of  $I_{DD-GREEN}$ . NCP4318 exits from *GREEN1* when four switching cycles are observed from  $V_{D1}$  as shown in Figure 59.

Before *GREEN1* being triggered, if the duration of no switching operation is longer than  $t_{GRN2-ENT}$ , a short *GREEN2* pulse is generated to reset the virtual  $V_{TH-OFF}$  and assert  $DLY\_EN$ .  $LLD$  may also be asserted when  $V_{TH-OFF}$  resets to a level lower than  $\eta_{LLD1}$ . Doing so, *GREEN2* prepares new SR operation starting condition and allows soft increment of SR gate pulses for the next switching bundle.

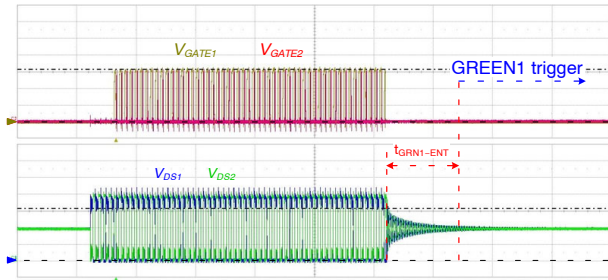


Figure 58. Entering *GREEN1*

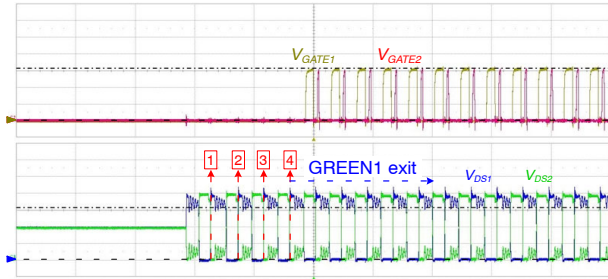


Figure 59. Exit from *GREEN1*

#### Limitation on SR Gate On-time Increasing Rate

To better cope with transitions of operating frequency, NCP4318 has an optional SR gate on-time increasing-rate limitation function. When this function is enable, the on-time of consecutive SR-gate pulses won't increase too much from their precedent pulse. The increase rate is limited as 550 ns of  $t_{GATE-LIM}$  between two consecutive pulses. In other words, when the on-time should change from a smaller value to a larger value, the SR gate takes a few switching cycle to increase its pulse width gradually.

More, when this function is enabled, the maximum pulse width of the SR gate start from 1.2  $\mu$ s after a *GREEN2* or *SRCINV* event. The maximum pulse width increases up to  $t_{SR-MAX-ON}$ .

#### Adaptive $V_{GATE}$ Control

Lowering the gate clamping voltage  $V_{GATE}$  reduces gate drive power consumption. Adaptive  $V_{GATE}$  control reduces  $V_{GATE}$  level when it is a better choice of operation. In NCP4318, there are three condition to trigger the adaptive  $V_{GATE}$ . First is the output load condition. In light load condition, to save the SR gate driving current and maximize efficiency, NCP4318 adaptively changes  $V_{GATE}$ . As shown in Figure 60, when  $LLD$  goes from '0' to '1', the gate clamp voltage reduces from 10 V to 6 V. It could save 40% of gate driving power consumption. In heavy load condition,  $V_{GATE}$  resumes to 10 V for lower turn-on resistance  $R_{DS-ON}$  of the SR MOSFET, as depicted in Figure 61. There is also a 3-level- $V_{GATE}$  option which set  $V_{GATE} = 5$  V when  $LLD = 2$ .

The second condition is the operating frequency. If the LLC operating frequency is higher than 200 kHz of  $f_{HFS-EN} = 1/t_{HFS-EN}$  in L-version and 250 kHz in H-version, NCP4318 reduces  $V_{GATE}$  for lowering SR gate driving current.

The last condition is junction temperature  $T_J$  of the IC. When  $T_J$  is higher than 105°C of  $T_{OTP1}$ ,  $V_{GATE}$  reduces to 6 V to reduce heat dissipation of the IC.  $V_{GATE}$  resumes to 10 V when  $T_J$  is lower than 80°C of  $T_{OTP-RST}$ .

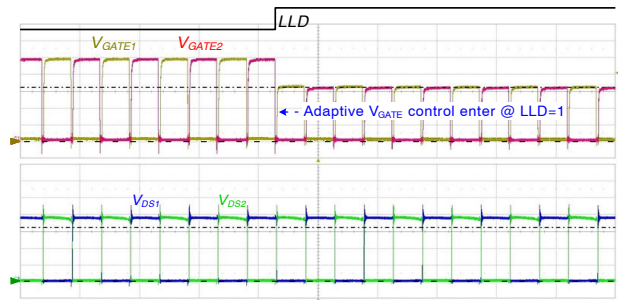


Figure 60.  $V_{GATE}$  Reduces when  $LLD$  is High

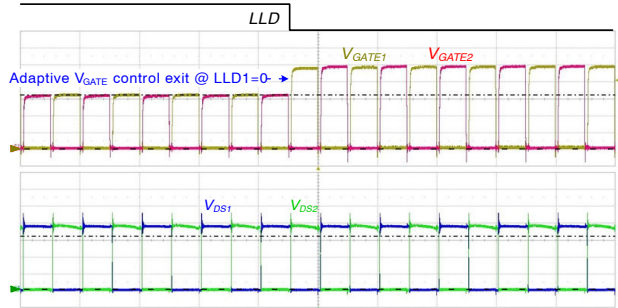


Figure 61.  $V_{GATE}$  Resumes When  $LLD$  is Low

#### Soft Start

At the beginning of LLC startup, the operating frequency is severely changed, and the symmetrical duty cycles between the high-side and low-side power switches on the primary side sometimes cannot be guaranteed. To avoid SR

operation during the startup transition, NCP4318 implements a soft-start function. After  $V_{DD}$  exceeds  $V_{DD-GATE-ON}$ , the SR gate skips the initial 256 consecutive  $V_{D1}$  and  $V_{D2}$  switching cycles to check whether LLC system is stable or not. After the first 256 cycles, NCP4318 starts generating SR gate pulses with  $V_{GATE} = 6\text{ V}$  and  $V_{TH-OFF} = V_{TH-OFF-RST}$ . If LLD-based adaptive  $V_{GATE}$  is enabled,  $V_{GATE}$  stays 6 V until  $LLD$  signal goes to zero. Otherwise,  $V_{GATE}$  stays 6 V for another 256 cycles. This allows soft-increment of SR gate pulses and gradual reduction of the SR dead time at startup.

### Protections

For higher system reliability, two protections are implemented in NCP4318. First one is the primary shutdown protection. In SR controller point of view, NCP4318 cannot know directly the primary side abnormal gate off, such as by a certain LLC protection or power-off. In that condition, SR gate should be turned off as soon as possible even in minimum on-time. Though  $SRCINV$  function can turn-off SR gate at that moment, it has a certain delay time  $t_{INV}$  for the confirmation. For a faster turning off, a primary shutdown protection is implemented.

When the LLC gate signal in the primary side suddenly cuts down, SR current shows a downward transition, which induces a high  $dV/dt$  on the drain sensing voltage. If the  $dV/dt$  is higher than  $V_{SD-PRI}/t_{INV}$ , the primary shutdown protection is triggered and the SR gate turns off immediately. In addition, it asserts  $GREEN1$ , which makes 4 cycles of SR gate skipping to ignore turn-on mis-trigger caused by energy bouncing in the secondary side. The primary shutdown protection is effective in the leading edge of the SR gate for 70% of its previous-cycle SR gate on-time.

The other protection is the abnormal drain sensing protection. In normal condition, when the SR gate is turn on and higher than 4.5 V, the drain sensing voltage  $V_D$  is expected low, which in any case should not exceed  $V_{TH-HGH}$ . However, in abnormal condition, due to  $V_D$  fluctuation,  $V_D$  can be higher than  $V_{TH-HGH}$  even when

$V_{GATE} > 4.5\text{ V}$ . In that condition, NCP4318 triggers the abnormal drain sensing protection, turns off the SR gate and makes  $GREEN1$  high.

To protect NCP4318 from overheating, NCP4318 stops operation when its junction temperature exceeds  $T_{OTP2}$ .

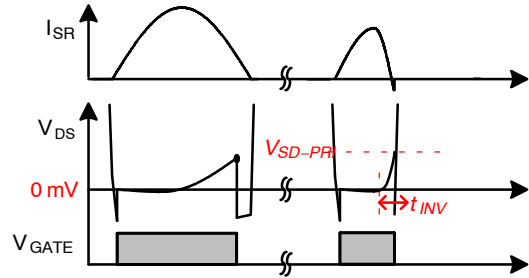


Figure 62. Triggering Primary Shutdown Protection

### Recover From $t_{ON-DLY2}$

When the  $DLY\_EN$  flag has been asserted, SR gate turns on after the body diode of the SR MOSFET conducts for  $t_{ON-DLY2}$ . NCP4318 clears the  $DLY\_EN$  flag by observing the  $V_D < V_{TH-ON}$  event. Before the SR gate turning on, if  $V_D$  crosses below  $V_{TH-ON}$  for only one time, a  $\eta_{INV-EXT}$  counter adds by one. This counter resets when the  $V_D < V_{TH-ON}$  event happens more than one time in one switching cycle. When the  $\eta_{INV-EXT}$  counter has elapsed, the  $DLY\_EN$  flag is cleared.

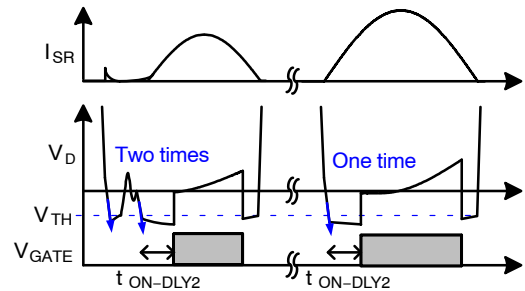


Figure 63. Criterion of Clearing the  $DLY\_EN$  Flag



8  
1  
SCALE 1:1

SOIC-8 EP  
CASE 751AC  
ISSUE E

DATE 05 OCT 2022

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.004 IN EXCESS OF MAXIMUM MATERIAL CONDITION.
4. DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 PER SIDE. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.010 mm PER SIDE.
5. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
6. DATUMS A AND B ARE TO BE DETERMINED AT DATUM H.
7. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10 TO 0.25 FROM THE LEAD TIP.
8. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

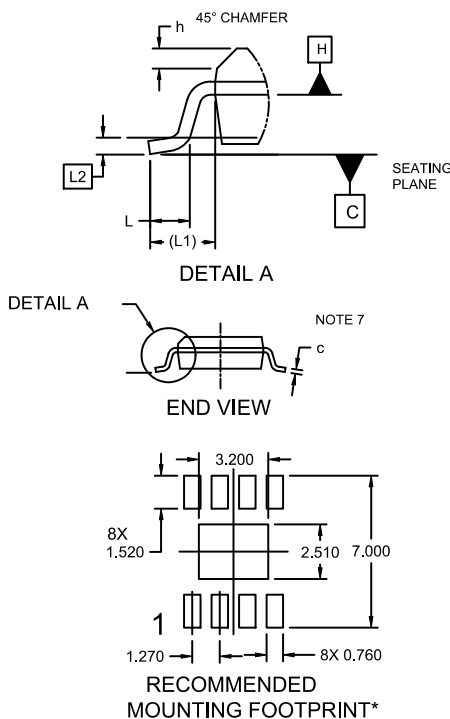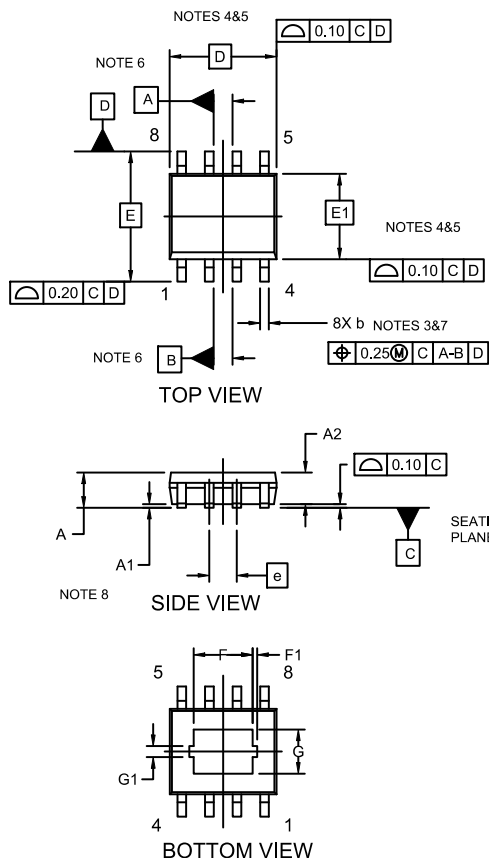

| DIM | MILLIMETERS |          |      |
|-----|-------------|----------|------|
|     | MIN.        | NOM.     | MAX. |
| A   | 1.35        | 1.55     | 1.75 |
| A1  | ---         | 0.05     | 0.10 |
| A2  | 1.35        | 1.50     | 1.65 |
| b   | 0.31        | 0.41     | 0.51 |
| c   | 0.17        | 0.21     | 0.23 |
| D   | 4.90 BSC    |          |      |
| E   | 6.00 BSC    |          |      |
| E1  | 3.90 BSC    |          |      |
| e   | 1.27 BSC    |          |      |
| F   | 2.24        | 2.72     | 3.20 |
| F1  |             | 0.20 REF |      |
| G   | 1.55        | 2.03     | 2.51 |
| G1  |             | 0.46 REF |      |
| h   | 0.25        | 0.38     | 0.50 |
| L   | 0.40        | 0.84     | 1.27 |
| L1  | 1.04 REF    |          |      |
| L2  | 0.25 REF    |          |      |
| Ø   | 0°          | 4°       | 8°   |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D."

GENERIC  
MARKING DIAGRAM\*



XXXXXX = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present and may be in either location. Some products may not follow the Generic Marking.


|                  |             |                                                                                                                                                                                  |
|------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON14029D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-8 EP   | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.




**SOIC-8, 150 mils**  
**CASE 751BD**  
**ISSUE O**

DATE 19 DEC 2008

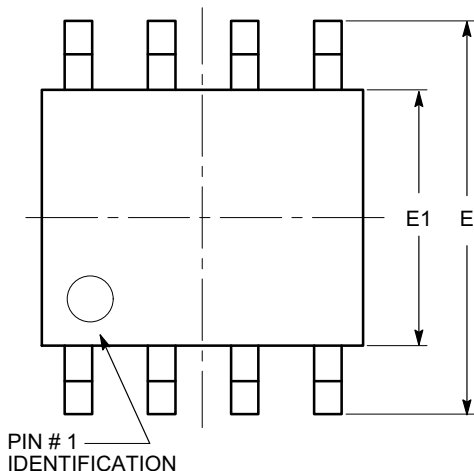


**TOP VIEW**

| SYMBOL   | MIN      | NOM | MAX  |
|----------|----------|-----|------|
| A        | 1.35     |     | 1.75 |
| A1       | 0.10     |     | 0.25 |
| b        | 0.33     |     | 0.51 |
| c        | 0.19     |     | 0.25 |
| D        | 4.80     |     | 5.00 |
| E        | 5.80     |     | 6.20 |
| E1       | 3.80     |     | 4.00 |
| e        | 1.27 BSC |     |      |
| h        | 0.25     |     | 0.50 |
| L        | 0.40     |     | 1.27 |
| $\theta$ | 0°       |     | 8°   |

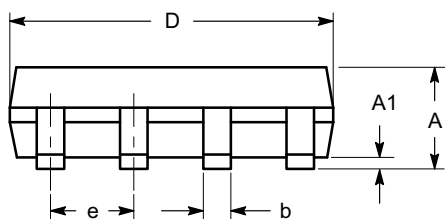

**SIDE VIEW**

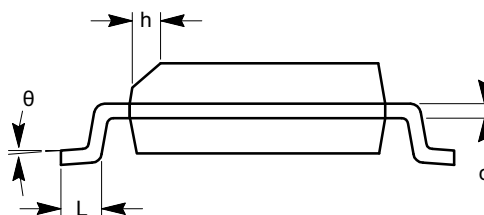

**END VIEW**

**Notes:**

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.

|                         |                         |                                                                                                                                                                                     |
|-------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON34272E</b>      | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-8, 150 MILS</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)