## SIEMENS

## Data sheet

## 3RT2625-1BB45



capacitor contactor, AC-6b 16.7 kVAr, / 400 V, 3-pole, 24 V DC, auxiliary contacts: 1 NO + 2 NC, screw terminal, size: S0

product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
General technical data	
size of contactor	SO
product extension auxiliary switch	No
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	3 000 000
electrical endurance (operating cycles)	200 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 $^\circ\mathrm{C}$ rated value	24 A
operating reactive power at AC-6b	
<ul> <li>at 230 V at 50/60 Hz at ambient temperature 60 °C rated value</li> </ul>	3 9.6 kvar
<ul> <li>at 400 V at 50/60 Hz at ambient temperature 60 °C rated value</li> </ul>	6 16.7 kvar

<ul> <li>at 500 V at 50/60 Hz at ambient temperature 60 °C rated value</li> </ul>	7 21 kvar
• at 690 V at 50/60 Hz at ambient temperature 60 °C rated	10 29 kvar
value	
no-load switching frequency	
• at DC	500 1/h
operating frequency at AC-6b	
• at 230 V maximum	180 1/h
• at 240 V maximum	180 1/h
• at 400 V maximum	180 1/h
• at 480 V maximum	180 1/h
• at 500 V maximum	180 1/h
• at 600 V maximum	180 1/h
• at 690 V maximum	150 1/h
Control circuit/ Control	
type of voltage	DC
type of voltage	DC
control supply voltage at DC	
rated value	24 V
operating range factor control supply voltage rated value of	27 V
magnet coil at DC	
initial value	0.8
• full-scale value	1.1
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	5.9 W
closing delay	
• at DC	50 170 ms
opening delay	
• at DC	15 18 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
residual current of the electronics for control with signal	
<0>	
<ul> <li>&lt;0&gt;         <ul> <li>• at DC at 24 V maximum permissible</li> </ul> </li> </ul>	16 mA
	16 mA
• at DC at 24 V maximum permissible	16 mA 2
at DC at 24 V maximum permissible     Auxiliary circuit	
at DC at 24 V maximum permissible Auxiliary circuit number of NC contacts for auxiliary contacts	2
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable	2 0
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact	2 0 2
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact  number of NO contacts for auxiliary contacts	2 0 2 1
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact  number of NO contacts for auxiliary contacts      attachable	2 0 2 1 0
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact      number of NO contacts for auxiliary contacts      attachable      instantaneous contact	2 0 2 1 0 1
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact      number of NO contacts for auxiliary contacts      attachable      instantaneous contact      operational current of auxiliary contacts at AC-12 maximum	2 0 2 1 0 1
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact      number of NO contacts for auxiliary contacts      attachable      instantaneous contact      operational current of auxiliary contacts at AC-12 maximum      operational current of auxiliary contacts at AC-15	2 0 2 1 0 1 1 10 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15             <ul> <li>at 230 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 10 A 6 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15             <ul> <li>at 230 V</li> <li>at 400 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 10 A 6 A 3 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 10 A 6 A 3 A
at DC at 24 V maximum permissible  Auxiliary circuit  number of NC contacts for auxiliary contacts      attachable      instantaneous contact  number of NO contacts for auxiliary contacts      attachable      instantaneous contact  operational current of auxiliary contacts at AC-12 maximum  operational current of auxiliary contacts at AC-15      at 230 V      at 400 V      at 690 V  operational current of auxiliary contacts at DC-13	2 0 2 1 0 1 1 10 A 6 A 3 A 1 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts</li> <li>attachable</li> <li>instantaneous contact</li> <li>number of NO contacts for auxiliary contacts</li> <li>attachable</li> <li>instantaneous contact</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15</li> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> <li>operational current of auxiliary contacts at DC-13</li> <li>at 24 V</li> </ul>	2 0 2 1 0 1 1 0 1 10 A 6 A 3 A 1 A 6 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13 <ul> <li>at 24 V</li> <li>at 60 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts</li> <li>attachable</li> <li>instantaneous contact</li> </ul> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13 <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> </ul> </li>	2 0 2 1 0 1 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts</li> <li>attachable</li> <li>instantaneous contact</li> </ul> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13 <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> </ul> </li>	2 0 2 1 0 1 1 0 1 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13 <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13 <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> </ul>	2 0 2 1 0 1 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15             <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13                     <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 220 V</li> <li>contact reliability of auxiliary contacts</li> </ul> </li> </ul> </li> </ul>	2 0 2 1 0 1 1 0 4 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.9 A 0.3 A 0.0000001
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15             <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings         <ul> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> <li>Short-circuit protection</li> </ul>	2 0 2 1 0 1 1 0 4 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.9 A 0.3 A 0.0000001
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15</li> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>contact rating of auxiliary contacts according to UL</li> </ul>	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.0000001 A 600 / Q600
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15             <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings         <ul> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> <li>Short-circuit protection</li> </ul>	2 0 2 1 0 1 1 0 4 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.9 A 0.3 A 0.0000001
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15                 <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 220 V</li> <li>contact reliability of auxiliary contacts</li> </ul> </li> <ul> <li>at 220 V</li> </ul> <ul> <li>at 220 V</li> <li>contact reliability of auxiliary contacts</li> <li>bul/CSA ratings</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> <li>bign of the fuse link                     <ul> <li>for short-circuit protection</li> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit with type of</li> </ul> </li> </ul>	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.00000001 A 600 / Q600
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15         <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings         <ul> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> <li>Short-circuit protection         <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit with type of coordination 1 required</li> </ul> </li></ul>	2 0 2 1 0 1 1 0 1 1 0 4 6 A 3 A 1 A 6 A 2 A 1 A 6 A 2 A 1 A 0.9 A 0.9 A 0.9 A 0.0000001 A600 / Q600
<ul> <li>at DC at 24 V maximum permissible</li> <li>Auxiliary circuit</li> <li>number of NC contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>number of NO contacts for auxiliary contacts         <ul> <li>attachable</li> <li>instantaneous contact</li> </ul> </li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-12 maximum</li> <li>operational current of auxiliary contacts at AC-15         <ul> <li>at 230 V</li> <li>at 400 V</li> <li>at 690 V</li> </ul> </li> <li>operational current of auxiliary contacts at DC-13         <ul> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings         <ul> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> <li>Short-circuit protection         <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit with type of coordination 1 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> </li></ul>	2 0 2 1 0 1 1 0 4 6 A 3 A 1 A 6 A 2 A 1 A 6 A 2 A 1 A 0.9 A 0.9 A 0.9 A 0.9 A 0.0000001

		backward by +/- 22.5° on ver	tical mounting surface			
fastening method		screw and snap-on mounting	g onto 35 mm DIN rail acco	rding to DIN EN 50022		
height		135 mm				
width		45 mm				
depth		165 mm				
required spacing						
<ul> <li>with side-by-side mounting at the s</li> </ul>	ide	10 mm				
<ul> <li>for grounded parts at the side</li> </ul>		10 mm				
Connections/ Terminals						
type of electrical connection						
<ul> <li>for main current circuit</li> </ul>		screw-type terminals				
<ul> <li>for auxiliary and control circuit</li> </ul>		screw-type terminals				
<ul> <li>at contactor for auxiliary contacts</li> </ul>		Screw-type terminals				
of magnet coil		Screw-type terminals				
type of connectable conductor cross-sect	ions for main contacts					
• solid		2x (1 2.5 mm²), 2x (2.5	10 mm²)			
<ul> <li>stranded</li> </ul>		2x (1 2.5 mm²), 2x (2.5				
<ul> <li>solid or stranded</li> </ul>		2x (1 2.5 mm²), 2x (2.5				
<ul> <li>finely stranded with core end proce</li> </ul>	essina	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5	·			
type of connectable conductor cross-s	-		, ,			
for auxiliary contacts						
	-		$2 \times (0.5 - 1.5 \text{ mm}^2) \times (0.75 - 2.5 \text{ mm}^2) \times 4 \text{ mm}^2$			
— solid		2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup> 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>				
<ul> <li>— solid or stranded</li> <li>finely stranded with core end</li> </ul>	processing					
— finely stranded with core end		2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75				
for AWG cables for auxiliary contact type of minimum connectable cross-second		2x (20 16), 2x (18 14), 2	2X 12			
contacts at AC-6b						
	• at 40 °C		1x 6 mm <sup>2</sup>			
	• at 60 °C		1x 10 mm <sup>2</sup> , 2x 6 mm <sup>2</sup>			
AWG number as coded connectable cono main contacts	ductor cross section for	16 8				
Safety related data						
product function						
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>		No				
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>		No				
protection class IP on the front according to IEC 60529		IP20				
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front				
Certificates/ approvals						
General Product Approval				EMC		
	Confirmatio	on 🦳		^		
		(UI)	COF			
			СПГ	Ś		
CSA CCC		UL		RCM		
De la metion et Oenfermeite	Test Osutifiert					
Declaration of Conformity	Test Certificat	es Marine / Shipping				
	Type Test Cer	tific-		AT N		
	ates/Test Re	port	Lloyds			
			Negister			
EG-Konf.		BUREAU	LRS	RINA		
		VERITAS				
other	Dangerous Go	bod				
O sector sti	<b></b>					
Confirmation	Transport Inform	nation				
(D.E)	<b>)</b>					
VDE						
Further information						

Siemens has decided to exit the Russian market (see here).

## https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2625-1BB45

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2625-1BB45

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2625-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2625-1BB45&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT26 -1RR45/char


Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2625-1BB45&objecttype=14&gridview=view1







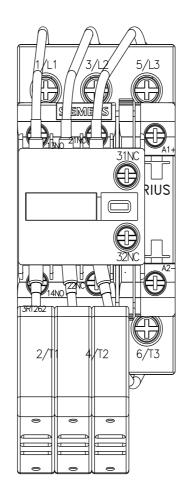

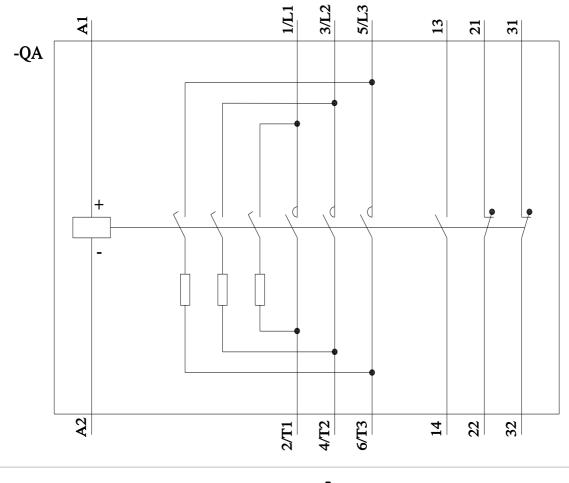

last modified:

11/21/2022 🖸

Subject to change without notice © Copyright Siemens