


3256 S. 92nd Street, Milwaukee, WI 53227,
P.O. Box 270132, Milwaukee, WI 53227
414-327-1555, Fax 414-327-0577, iebyross@yahoo.com,
www.industrialelectronics.biz




ADVANCED MICRO LITES,
INC.

TL-1 LENS END LAMPS




Design Volts	Design Amps	Candle Power	Filament Shape	Average Life (Hours)	WIRE TERMINAL LAMP NUMBER
5.0	.060	EFC	C-2R	25,000	1283
5.0	.115	EFC	C-2R	40,000	1415

TL-1³/₄



Design Volts	Design Amps	Candle Power	Filament Shape	Average Life (Hours)	MIDGET GROOVED LAMP NUMBER
2.5	.35	EFC	C-2R	10,000	253

TL-3



Design Volts	Design Amps	Candle Power	Filament Shape	Average Life (Hours)	MINIATURE SCREW LAMP NUMBER
1.2	.22	EFC	S-2	5	112
2.25	.25	EFC	C-6	5	222
2.33	.27	EFC	C-6	10	243


3256 S. 92nd Street, Milwaukee, WI 53227,
P.O. Box 270132, Milwaukee, WI 53227
414-327-1555, Fax 414-327-0577, iebyross@yahoo.com,
www.industrialelectronics.biz



ADVANCED MICRO LITES,
INC.


LAMPS

NEON GLOW LAMPS

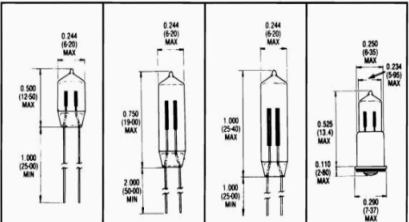

Electrical			Series Resistor (Ohms)	Life Average Hours	T-2 WIRE TERMINAL LAMP NUMBER	T-2 WIRE TERMINAL LAMP NUMBER	T-2 WIRE TERMINAL LAMP NUMBER	T-2 MIDGET FLANGED LAMP NUMBER
Circuit Voltage	Break-Down AC	Nominal Amperage						
105-125	65	0.3	220K	25,000	A1B	A9A(NE-2E) C2A(NE-2H)*	A1A(NE-2)	A1G A1H
105-125	95	1.2	47K	25,000	A1C			
105-125	65	0.7	100K	25,000				
105-125	95	1.9	30K	25,000				
105-125	65	0.7	100K	25,000				
105-125	65	0.3	100K	25,000				
105-125	75	1.2	47K	25,000				
105-125	65	0.7	100K	25,000		A2B(NE-2V)		

NEON GLOW LAMPS



Electrical			Series Resistor (Ohms)	Life Average Hours	T-2	T-3½	T-4½
Circuit Voltage	Break-Down AC	Nominal Amperage			MIDGET FLANGED LAMP NUMBER	MINIATURE BAYONET LAMP NUMBER	CANDELABRA LAMP NUMBER
105-125	65	0.7	100K	25,000	C7A (NE2D)	B1A (NE-51) B2A (NE-51H)*	B7A (NE-45)
105-125	75	1.9	30K	25,000	C9A (NE2J)*		
105-125	65	0.3	220K	15,000			
105-125	95	1.2	47K	25,000			
105-125	65	2.0	30K	7,500			

*High brightness lamp.