

## ADL2-040-IC1200-TS

Constant Current Isolated LED Driver

Output Power: **40W**

Output Current: **850-1200mA** (dip switch selectable)



**IP20**



**5 years warranty**

### Product Features:

- Single channel isolated output, output current selectable by DIP switch.
- Support Leading edge (TRIAC) and Trailing edge (ELV) dimmer
- Dimming range: 5-100%, smooth dimming, no flicker
- Built-in active PFC function
- Protections: Short circuit, Overload, Over voltage
- Suitable for indoor LED lighting application



### Applications:



Downlight



Panel Light



Spotlight



Ceiling Light



Decorative Light



Floor Light



Track Light





























Flood Light


### Electrical specification:

<b>Input</b>	Voltage	120VAC-277VAC			
	Frequency	50/60Hz			
	Current	0.6Amax@120VAC			
	Efficiency	>87%@120VAC, Full load			
	PF	≥0.95@120VAC, Full load			
	THD (full load)	<10%@120VAC, Full load			
	Inrush Current	Cold start, 30A@120VAC			
<b>Output</b>	Current/Voltage/Power	850mA/9-42V/35.7W 900mA/9-42V/37.8W	950mA/9-42V/39.99W 1000mA/9-40V/40W	1050mA/9-38V/39.9W 1100mA/9-36V/39.6W	1150mA/9-34V/39.1W 1200mA/9-33V/39.6W
	Ripple Current	<3%			
	No load output voltage	48V Max			
	Frequency	1KHz Min PWM			
	Current tolerance	±5%			
	Standby Power	<3.5W			
<b>Protection</b>	Over Voltage	Close output, recovers automatically after fault removed			
	Over load	Hiccup, recovers after fault condition is removed			
	Short circuit	Close output, recovers automatically after fault removed			
<b>Safety &amp; EMC</b>	Surge	L-N:1KV			
	Withstand Voltage	I/P-O/P: 3000VAC/1min/5mA			
	Safety standards	UL8750/UL1310/CSA25013,CSA class P			
	EMI Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3			
	EMC Immunity	FCC class B (120V) /class A (277V)			
<b>Functions</b>	Dimming	TRIAC/ELV			
	Dimming range	5%-100% Dimming to off			
<b>Other</b>	Dimension (L*W*H),	4.76x1.73x1.04" (121x44x26.5mm)			
	Packing Information	Net weight: 156g±5%/PCS; 50PCS/Carton; 8.3kg±5%/Carton; Carton Size: 286x239x194mm			
	IP rating	IP20			
	Operating temp / Relative humidity	-20°C~-+50°C, / 20~90% RH			
	tc	85°C			
	Lifetime	50,000h@tc:85°C			
	Material	PC			


## Current Selection Table:

ON	OFF	  	  	  	  	  	  	  	  
		1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3
		850mA	900mA	950mA	1000mA	1050mA	1100mA	1150mA	1200mA
		9-42V	9-42V	9-42V	9-40V	9-38V	9-36V	9-34V	9-33V


## Dimming Curve:

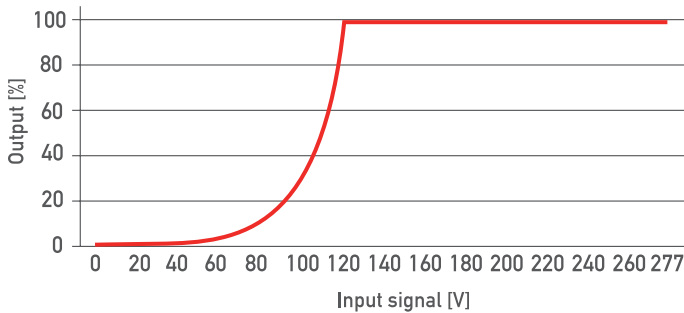

## Wiring Diagram:

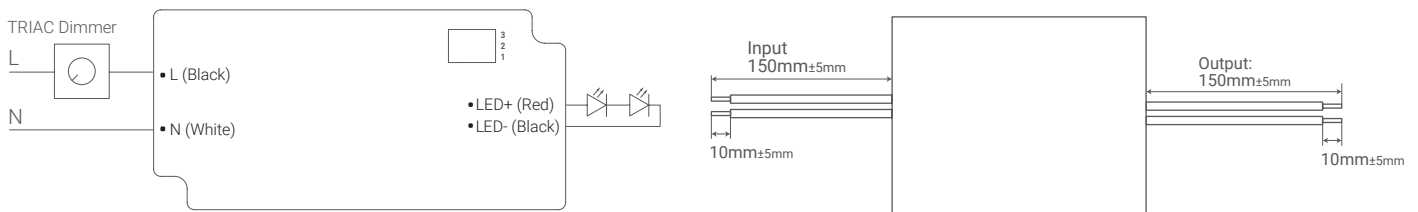


## Dimmensions:

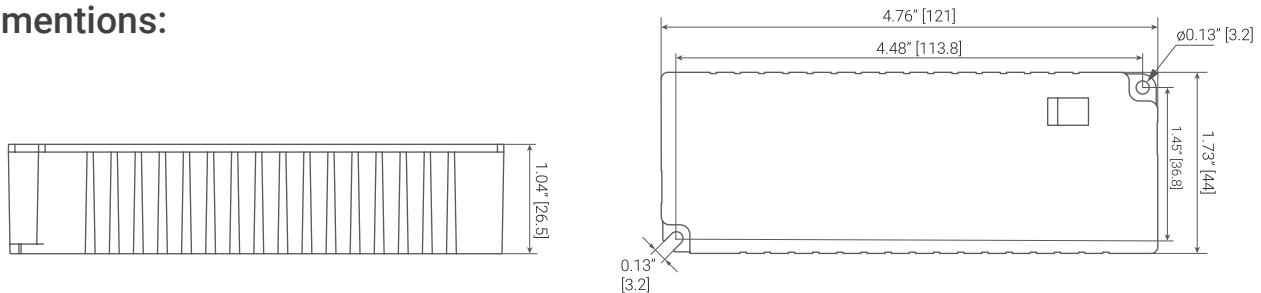

## Warranty:

Warranty period General Terms and Conditions <https://adurasolutions.com/warranty>

## Safety:

-  **Risk of electrical shock. May result in serious injury or death. Disconnect power before servicing or installing.**
- The LED driver may only be connected and installed by a qualified electrician. All applicable regulations, legislation, and building codes must be observed. Incorrect installation of the LED driver can cause irreparable damage to the LED driver and the connected LEDs.
- Pay attention when connecting the LEDs: polarity reversal results in no light output and often damages the LEDs.
- LED drivers are designed and intended to operate LED loads only. Powering non-LED loads may push the LED driver outside its specified design limits and is, therefore, not covered by any warranty.
- To guarantee sufficient convection cooling, **keep a minimum distance of 2" (50mm) or above** and lateral distance to other units. Good heat dissipation conditions extend product life. Install the product in a well-ventilated environment.
- Please make sure LED power supply output voltage, current is used to meet the product requirements.
- The current rating for the output cable must be rated higher than or equal to the output current of the power supply, refer to the product specifications.
- Please observe voltage drop over long cable lengths. Longer cable lengths increase EMI susceptibility.
- In case of malfunction, do not repair it.