

HLG-120H series









Applications

· LED street lighting

LED fishing lamp

GTIN CODE

LED high-bay lighting

Parking space lighting

LED greenhouse lighting

• Type "HL" for use in Class I, Division 2

MW Search: https://www.meanwell.com/serviceGTIN.aspx

hazardous (Classified) location.

Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- Built-in active PFC function
- · IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty

Description

HLG-120H series is a 120W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-120H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for $-40^{\circ}C$ ~ $+80^{\circ}C$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding HLG - 120H - 48 A Function options Rated output voltage (12V/15V/20V/24V/30V/36V/42V/48V/54V) Rated wattage Series name


Туре	IP Level	Function	Note
Blank	IP67	lo and Vo fixed	In Stock
A	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




SPECIFICATION

DC VOLTAGE CONSTANT CURRENT REGION Note.4	HLG-120H-12	HLG-120H-15 15V	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36 36∨	HLG-120H-42	HLG-120H-48	HLG-120H-54		
CONSTANT CURRENT REGION Note.4	0			1240	1300	307	42V	48V	54V		
	6 ~12V	7.5 ~ 15V	10~20V	12~24V	15 ~ 30V	18 ~ 36V	21~42V	24~48V	27~54V		
RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A		
RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W		
RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p		
						2001110-0	2001110p-p	200111vp-p	200111Vp-p		
VOLTAGE ADJ. RANGE	Adjustable for A/AB-Type only (via built-in potentiometer) 10.8 ~ 13.5V 13.5 ~ 17V 17 ~ 22V 22 ~ 27V 27 ~ 33V 33 ~ 40V 38 ~ 46V 43 ~ 53V 49 ~ 58V										
CURRENT ADJ. RANGE	Adjustable fo	r A/AB-Type o	nly (via built-ir	n potentiomete	er)	1	1	1			
CONNENT ADD. NANCE	5~10A	4 ~ 8A	3~6A	2.5 ~ 5A	2~4A	1.7 ~ 3.4A	1.4~2.9A	1.2~2.5A	1.1~2.3A		
VOLTAGE TOLERANCE Note.3	±2.5%	$\pm 2.0\%$	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
LINE REGULATION	±0.5%	$\pm 0.5\%$	±0.5%	±0.5%	±0.5%	±0.5%	$\pm 0.5\%$	±0.5%	±0.5%		
LOAD REGULATION	±2.0%	$\pm 1.5\%$	±0.5%	$\pm 0.5\%$	±0.5%	$\pm 0.5\%$	$\pm 0.5\%$	±0.5%	$\pm 0.5\%$		
SETUP, RISE TIME Note.6	1200ms,50ms/115VAC 500ms,50ms/230VAC										
HOLD UP TIME (Typ.)	12ms / 115VAC, 230VAC										
VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)										
FREQUENCY RANGE	47 ~ 63Hz										
	PF≧0.98/115VAC, PF≧0.95/230VAC, PF≧0.93/277VAC @ full load										
POWER PACIOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)										
	THD<20% (@ load≥50% / 115VAC 230VAC: @ load≥75% / 277VAC)										
TOTAL HARMONIC DISTORTION	(Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)										
EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%		
AC CURRENT (Typ.)								1			
	COLD START	60A(twidth=375	us measured a	t 50% lpeak) at 2	230VAC: Per N	EMA 410					
CIRCUIT BREAKER	5 units (circui	t breaker of typ	oe B) / 9 units ((circuit breaker	of type C) at 2	30VAC					
	<0.75mA/27	7VAC									
OVER CURRENT											
	Constant current limiting, recovers automatically after fault condition is removed										
SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed										
OVER VOLTAGE						41~46V	47~53V	54 ~ 63V	59 ~ 65V		
		-	· ·	-	-						
OVER TEMPERATURE Note.9											
WORKING TEMP.		· · · · · · · · · · · · · · · · · · ·	e refer to "OU"	TPUT LOAD v	s TEMPERATI	JRE" section)					
MAX. CASE TEMP.	Tcase=+80°C										
WORKING HUMIDITY	20 ~ 95% RH non-condensing										
STORAGE TEMP., HUMIDITY											
TEMP. COEFFICIENT											
VIBRATION	10~500Hz, 5	G 12min./1cyc	le, period for	72min. each al	ong X, Y, Z axe	S					
SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08, BS EN/EN 61347-1, BS EN/EN 61347-2-13, AS/NZS 61347-1(except for AB-type),										
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC										
ISOLATION RESISTANCE	I/P-O/P, I/P-F	G, O/P-FG:10	00M Ohms / 50	0VDC/25°C/	70% RH						
	compliance to BS EN/EN55015, BS EN/EN55032 Class B, BS EN/EN61000-3-2 Class C (@ load≥50%) ; BS EN/EN61000-3-								EN61000-3-3		
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity										
MTBF											
DIMENSION				,,		(20	- 1				
		()	JFT								
 PACKING [1.12hg; 12p(s)/14.4kg/0.800F1 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Please refer to "DRIVING METHODS OF LED MODULE". De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf) To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. For OTP which triggered at light load/no load condition, proceed AC repower on to recovery. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500 13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf For A/AB type need to consider build in using to comp											
	LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) AC CURRENT (Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE Note.9 WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION Note.8 EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT speciall 2. Ripple & noise are measure 3. Tolerance : includes set up t4 . Please refer to "DRIVING M 5. De-rating may be needed ut 6. Length of set up time is meat 7. The driver is considered as complete installation, the first (as available on https://www. 8. To fulfill requirements of the connected to the mains. 9. For OTP which triggered at 10. This series meets the typic 11. Please refer to the warrant 21. The ambient temperature of 13. For any application note an https://www. 8. To fulfill requirements of the connected to the mains. 9. For OTP which triggered at 10. This series meets the typic 11. Please refer to the warrant 21. The ambient temperature of 21. Please refer to the warrant 23. For OTP which triggered at 24. For A/AB type need to con	CURRENT ADJ. RANGE 5 ~ 10A VOLTAGE TOLERANCE Note.3 ±2.5% LINE REGULATION ±0.5% LOAD REGULATION ±2.0% SETUP, RISE TIME Note.6 10DU UP TIME (Typ.) 12ms / 115VA VOLTAGE RANGE Note.6 POWER FACTOR (Typ.) PF≥0.98/115 (Please refer) TOTAL HARMONIC DISTORTION THD < 20% (0 (Please refer) AC CURRENT (Typ.) 1.4A / 115VAC MAX. No. of PSUs on 16A CIRCUIT BREAKER 5 units (circuit LEAKAGE CURRENT <0.75mA / 27	CURRENT ADJ. RANGE $5 - 10A$ $4 - 8A$ VOLTAGE TOLERANCE Note.3 $\pm 2.5\%$ $\pm 2.0\%$ LINE REGULATION $\pm 0.5\%$ $\pm 0.5\%$ LOAD REGULATION $\pm 2.0\%$ $\pm 1.5\%$ SETUP, RISE TIMENote.6 $1200ms,50ms,115VAC, 230VAC$ VOLTAGE RANGENote.5 $90 - 305VAC$ $27 - 43$ POWER FACTOR (Typ.) $90 - 305VAC$ $72 - 43$ POWER FACTOR (Typ.) $PF \ge 0.98/115VAC, PF \ge 0.9$ (Please refer to "TOTAL HARMONIC DISTORTIONTHD < 20% (@ load $\ge 50\%$ CTAL HARMONIC DISTORTIONTHD < 20% (@ load $\ge 50\%$ REFICIENCY (Typ.) 92% 22% AC CURRENT (Typ.)COLD START 60A(twidth=375)MAX. No. of PSUs on 16A5 units (circuit breaker of typ.)LEAKAGE CURRENT $<0.75mA / 277VAC$ OVER CURRENT $95 - 108\%$ COVER VOLTAGEShut down o/p voltage, recoWORKING TEMP.Tcase= $+40' + +80^{\circ}C$ (PleasMAX. CASE TEMP.Tcase= $+40''C$ OVER TEMPERATURENote.8MAX. CASE TEMP.Tcase= $+80^{\circ}C$ WORKING TEMP.Tcase= $+80^{\circ}C$ WORKING TEMP. $10 - 500Hz, 56 12min./1cy CSAFETY STANDARDSNote.8SAFETY STANDARDSNote.8GMTIATA3, CB1525.12Compliance to BS EN/EN51ISOLATION RESISTANCE(P-O/P, I/P-FG, O/P-FG, 15)IMTEF2185.8K hrs min. Telcordia SDIMENSION220*68*38.8m (L*W*)OVER COLFFICIENT40 - 80^{\circ}C/PFG, 10.95\%RHTEMP. COEFFICIENT10 - 500Hz, 56 120min./1cy C<$	CURRENT ADJ. RANGE $5 - 10A$ $4 - 8A$ $3 - 6A$ VOLTAGE TOLERANCE Note.3 $\pm 2.5\%$ $\pm 2.0\%$ $\pm 1.0\%$ LINE REGULATION $\pm 0.5\%$ $\pm 0.5\%$ $\pm 0.5\%$ LOAD REGULATION $\pm 0.5\%$ $\pm 0.5\%$ $\pm 0.5\%$ SETUP, RISE TIME Notes 1200ms,50ms/115VAC $50 - 305VAC$ $127 - 431VDC$ VOLTAGE RANGE Notes 90 - 305VAC $127 - 431VDC$ (Please refer to "STATIC CHARACTERIST FREQUENCY RANGE 47 - 63Hz POWER FACTOR (Typ.) PF $\ge 0.99/115VAC$, $PF \ge 0.95/230VAC$, PF POWER FACTOR (Typ.) PS $\ge 0.91/15VAC$, $PF \ge 0.95/230VAC$, PF (Please refer to "TOTAL HARMONIC DISTORTION THO 20% (@ load $\ge 50\%$, /115VAC, 230 (Please refer to "TOTAL HARMONIC DISTORTION THO 20% (@ load $\ge 50\%$, /115VAC, 230 REFFICIENCY (Typ.) 92% 92% 93% AC CURRENT (Typ.) COLD START 60A(twidth=375 xs measured a MAX. No. of PSUs on 16A Sunits (circuit breaker of type B) / 9 units of CIRCUIT BREAKER Sunits (circuit breaker of type B) / 9 units of OVER VOLTAGE Sunstant current limitling, recovers automad	CURRENT ADJ. RANCE 5-10A 4 = 8A 3 = 6A 2.5 = 5A VOLTAGE TOLERANCE Note.3 $\pm 2.5\%$ $\pm 2.0\%$ $\pm 1.0\%$ $\pm 0.5\%$ Coll To TOTAL HARMONIC DISTORTION THD< 20%	5 - 10Å 4 - 8Å 3 - 6Å 2 - 5Å 2 - 4Å VOLTAGE TOLERANCE Nota 2.25% ± 0.5%	CURRENT ADJ, RANGE 5 - 10.4 4 - 8.A 2 5 - 5.A 2 - 4.A 1.7 - 3.4.A VOLTAGE TOLERANCE No.8 ± 2.5% ± 2.0% ± 1.0% ± 0.5%	CURRENT JOJ, RANGE 5-10.A 4-8.A 2-6.A 2-6.A 17-3.A. 1.4-2.8.A. VOLTAGE TOLERANCE Notes 2.5.% ±2.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±0.5%	CURRENT INJURATION 4 - AA 2 = AA 2 = -AA 2 = -AA 1.7AA 1.4 - 2.0A 1.2 - 2.8A VOLTAGE TOLERANDE Neus 2 - 23K 1.2 0/S 1.1 0/S ± 1.0 /S ± 0.5 /S		



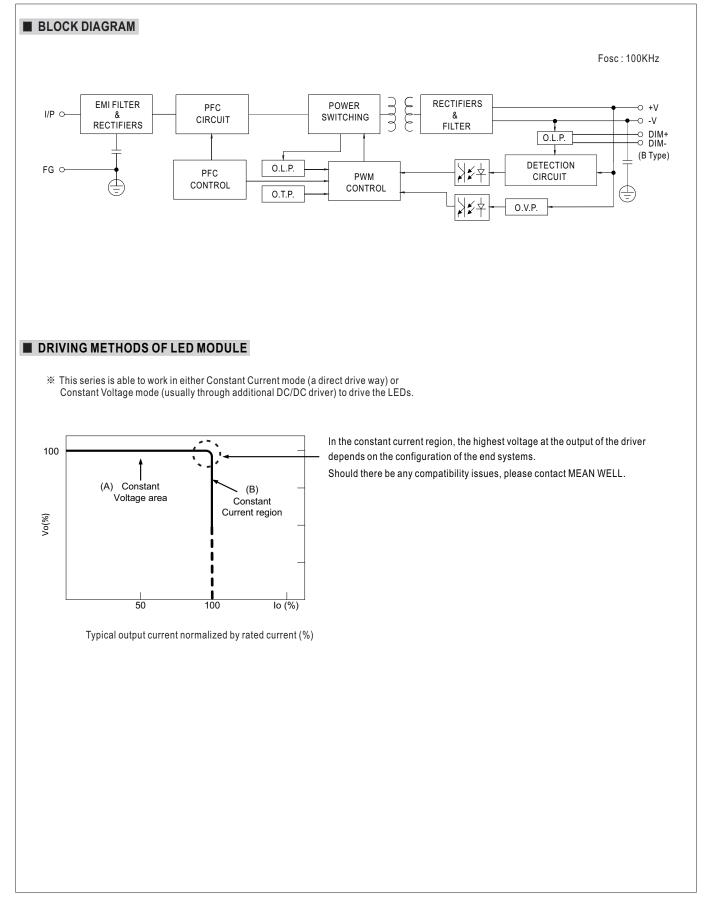




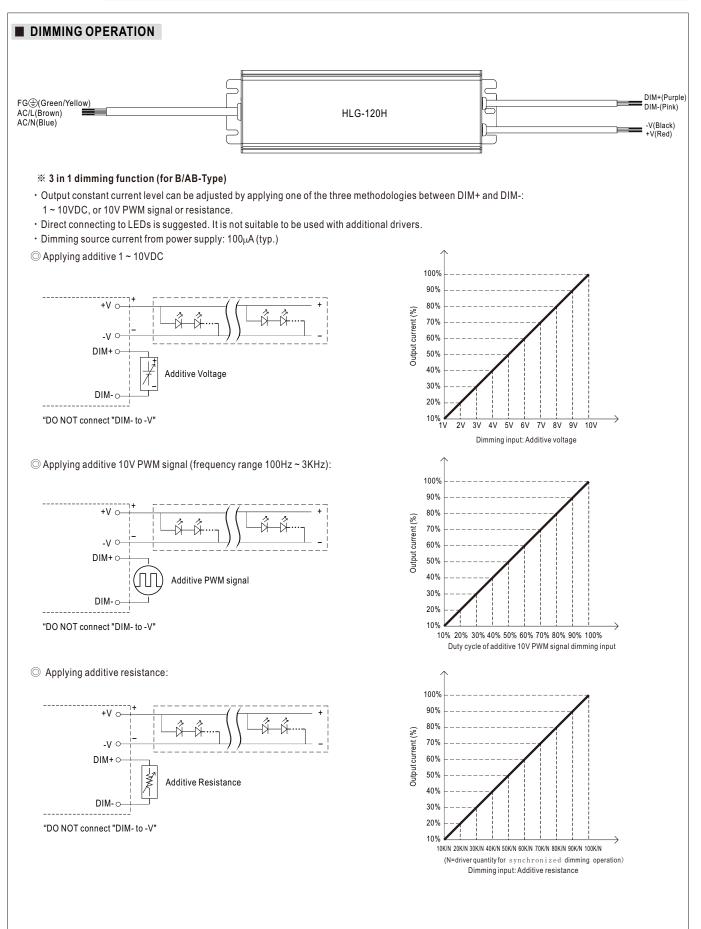




HLG-120H series

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

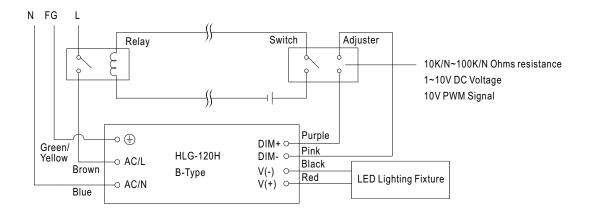

Using a switch and relay can turn ON/OFF the lighting fixture.




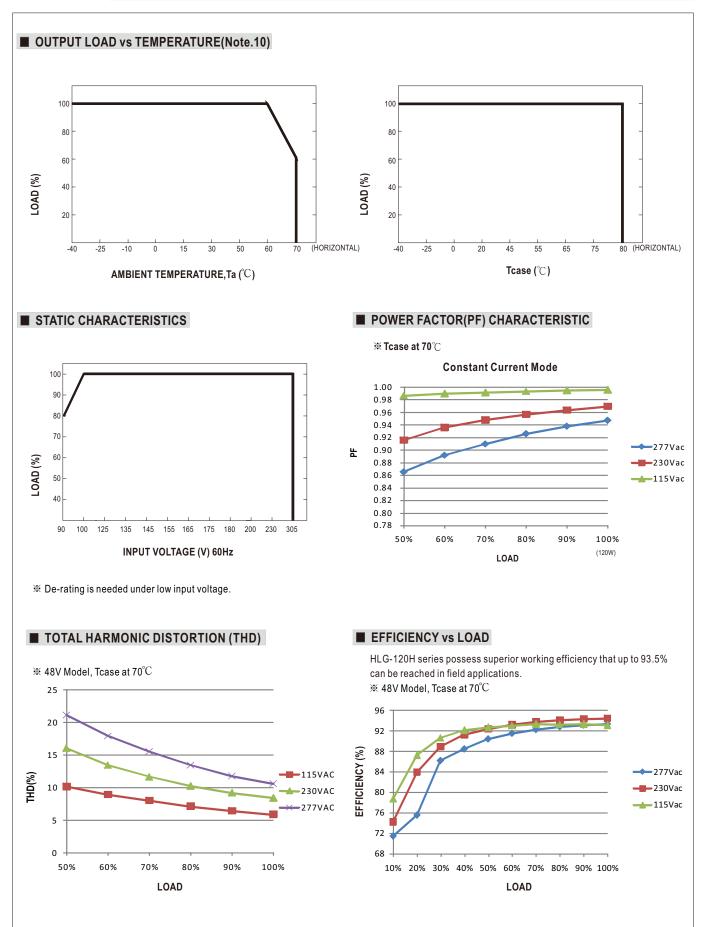




HLG-120H series


LIFE TIME

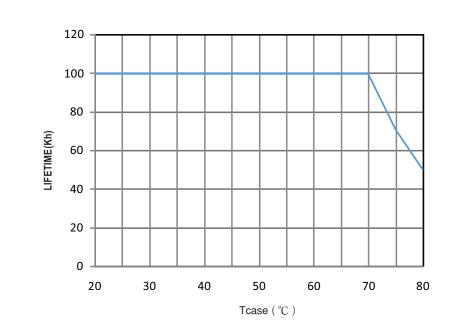



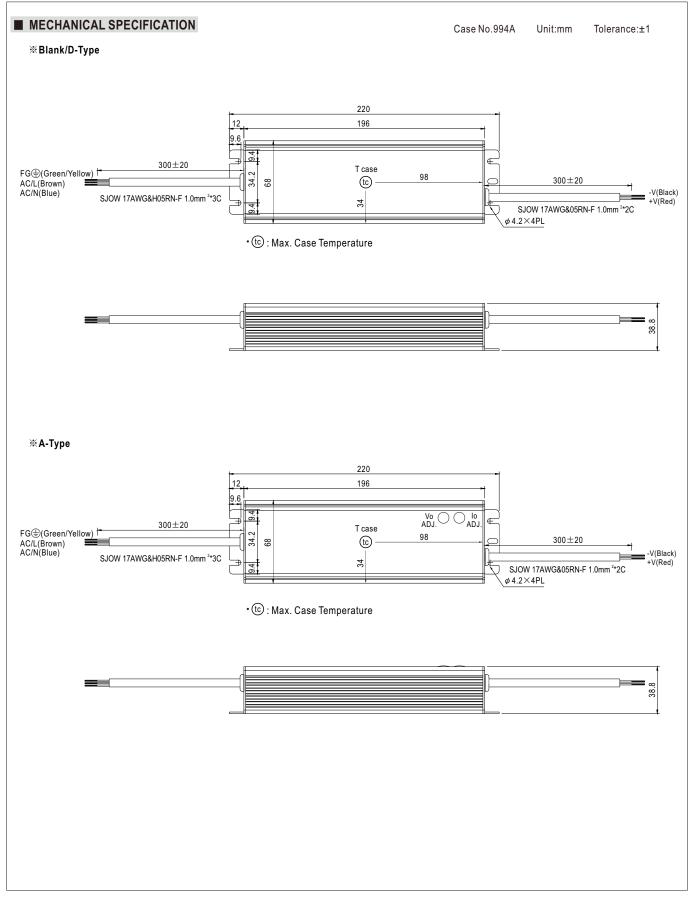



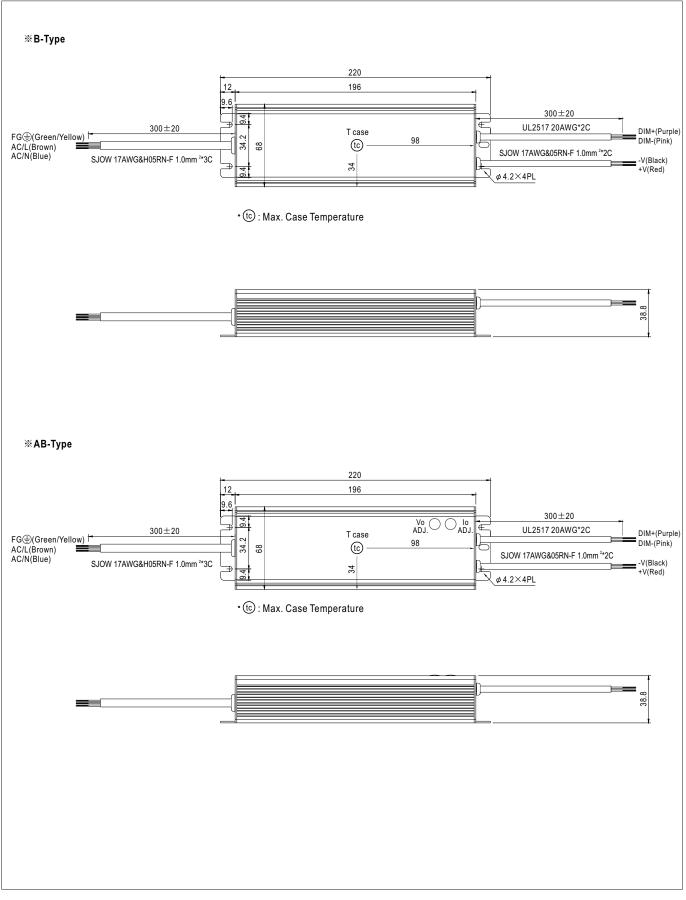



HLG-120H series

WATERPROOF CONNECTION

% Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120H to operate in dry/wet/damp or outdoor environment.

