
MOTOR SPECIFICATIONS




DIMENSIONS




Part Number WO-417-13-06 Step Angle 0.9° Frame Size NEMA 17 Body Length (Dim. A) 1.38 in (35.1 mm) Current 0.8 Amps/Phase Holding Torque 20.4 oz-in (0.14 Nm) Resistance 6.6 Ohms/Phase Rotor Inertia 0.11 oz-in² 4 Number of Leads Connection **Bipolar** Weight 0.41 lbs (0.19 kg)

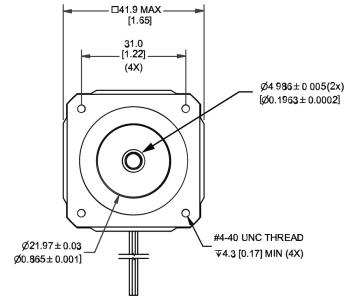

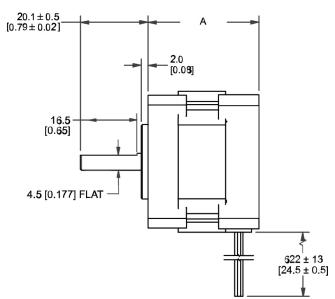

PERFORMANCE CURVE

417-13-06 24 VCD, 0.8 AMP

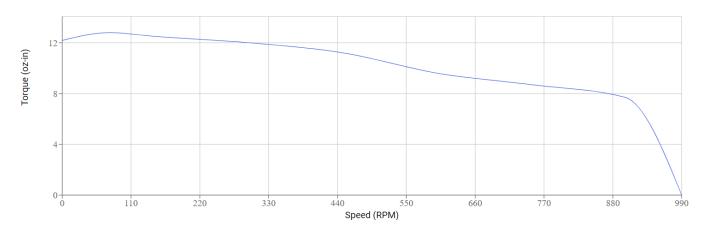

OPERATING SPECIFICATIONS

Radial Play	0.001" max @ 1 lbs load
End Play	0.003" max @ 2 lbs load
Shaft Run Out	0.002" TIR
Concentricity of Mounting Pilot to Shaft	0.003" TIR
Perpendicularity of Shaft to Mounting Face	0.003" TIR
Max Axial Load	6 lbs
Maximum Case Temperature	80 C
Ambient Temperature	-20° to 50° C
Storage Temperature	-20° to 100° C
Humidity Range	85% or less, non-condensing
Magnet Wire Insulation	Class B 130° C
Insulation Resistance	100MΩ at 500 VDC
Dielectric Strength	500 VAC for 1 minute

WIRING TABLE

COLOR	FUNCTION
Red	A+ Phase
Blue	A- Phase
Green	B + Phase
Black	B- Phase

OPERATION & USAGE TIPS



Do not disassemble motors; a significant reduction in motor performance will occur.



Do not machine shafts; this will have a negative effect on shaft run out and perpendicularity.



motor from drive while in operation.



Do not use holding torque/detent torque of motor as a fail safe brake.



Do not hold motor by lead wires.



Do not exceed the rated current; this will burn the motor

 ${\sf FAILURE\ TO\ COMPLY\ WITH\ THESE\ RECOMMENDATIONS\ WILL\ VOID\ ALL\ WARRANTY\ TERMS}$

RECOMMENDED



Microstepping Driver



Single Axis Controller + Driver **R256-RO**

Motion Control, Solved.

MOTOR ENGINEERING & MANUFACTURING







Small Batch to OEM Volume Production

