

## Data sheet for SINAMICS G120X

Article No. : 6SL3230-1YE10-0AF0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :



Figure similar

### Rated data

#### Input

Number of phases	3 AC	
Line voltage	380 ... 480 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
<b>Rated voltage</b>	<b>400V IEC</b>	<b>480V NEC</b>
Rated current (LO)	2.10 A	2.00 A
Rated current (HO)	1.70 A	1.60 A

#### Output

Number of phases	3 AC	
<b>Rated voltage</b>	<b>400V IEC</b>	<b>480V NEC <sup>1)</sup></b>
Rated power (LO)	0.75 kW	1.00 hp
Rated power (HO)	0.55 kW	0.75 hp
Rated current (LO)	2.20 A	2.10 A
Rated current (HO)	1.70 A	1.60 A
Rated current (IN)	2.30 A	
Max. output current	2.70 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

#### Overload capability

Low Overload (LO)	110% base load current IL for 60 s in a 300 s cycle time
High Overload (HO)	150% x base load current IH for 60 s within a 600 s cycle time

### General tech. specifications

Power factor $\lambda$	0.70 ... 0.85
Offset factor $\cos \varphi$	0.96
Efficiency $\eta$	0.96
Sound pressure level (1m)	55 dB
Power loss <sup>3)</sup>	0.043 kW
Filter class (integrated)	RFI suppression filter for Category C2
EMC category (with accessories)	Category C2
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7-1500F)

### Communication

Communication	PROFINET, EtherNet/IP
---------------	-----------------------

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

#### Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

#### Switching threshold as digital input

0 → 1	4 V
1 → 0	1.6 V

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5$ °C
--

### Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

## Data sheet for SINAMICS G120X


Article No. : 6SL3230-1YE10-0AF0

Ambient conditions	
Standard board coating type	Class 3C3, according to IEC 60721-3-3: 2002
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.005 m³/s (0.177 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation	-20 ... 45 °C (-4 ... 113 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)
Relative humidity	
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible

Connections	
Signal cable	
Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
Line side	
Version	screw-type terminal
Conductor cross-section	1.50 ... 2.50 mm² (AWG 16 ... AWG 14)
Motor end	
Version	Screw-type terminals
Conductor cross-section	1.50 ... 2.50 mm² (AWG 16 ... AWG 14)
DC link (for braking resistor)	
PE connection	On housing with M4 screw
Max. motor cable length	
Shielded	150 m (492.13 ft)

Mechanical data	
Degree of protection	IP20 / UL open type
Frame size	FSA
Net weight	3.4 kg (7.50 lb)
Dimensions	
Width	73 mm (2.87 in)
Height	232 mm (9.13 in)
Depth	218 mm (8.58 in)
Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	29.6 %

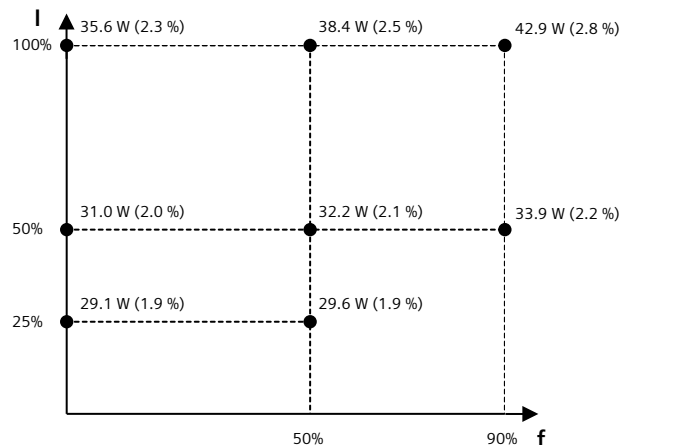

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V  
<sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.