

Changeover Cam Switches, Type R, Door or Thru Panel Mounting



COMPLY WITH RULES

IEC 947-3, EN 60947-3, UL508

SERIES			P012-P016-P020 PX12-PX16-PX20			C025-C032-C040 CX25-CX32-CX40			C063-C080		G125	G200
Protection class	control	EN 60529 (UL50) NEMA 4X	IP65 (Type 1 - 4 - 4X) IP40 IP20 (P0) - IP10 (PX)			IP65 (Type 1 - 4 - 4X) IP40 IP20 (P0) - IP10 (PX)			IP65 IP40 IP00 II 3		IP65 - IP00 IIIA 3	IP65 - IP00 IIIA 3
Material group		EN 60947-1	II			II			II		IIIA	IIIA
Pollution grade		EN 60947-1	3			3			3		3	3
Flammability		UL94	V0 (Live Electrical parts)			V0 (Live Electrical parts)			V0 (Live Electrical parts)		V0 (Live Electrical parts)	V0 (Live Electrical parts)
Ambient temperature		°C	Operating: -40 +85 Storage: -40 +70			Operating: -40 +85 Storage: -40 +70			Operating: -40 +70 Storage: -40 +70		Operating: -15 +55 Storage: -25 +70	Operating: -15 +55 Storage: -25 +70
Climate Withstand		°C	Hot damp Unsettled hot damp			Hot damp Unsettled hot damp			Hot damp Unsettled hot damp		-	-
Terminal screw identification		IEC 68 part 2-3 IEC 68 part 2-30	EN50013			EN50013			EN50013		-	-
Connections	Terminal block caliber	EN60947-1	A3			A5			A7		-	-
	Terminal screw		M3,5			M4			2xM4		Hex. screw M8 for bars and cable lugs	
	Screwing torque	EN60947-1	0,8 Nm (7,2 lb. in.)			1,2 Nm (10,6 lb. in.)			1,2 Nm (10,6 lb. in.)		-	-
		UL508	7,5 lb. in. (0,85 Nm)			12 lb. in. (1,4 Nm)			10,62 lb. in. (1,2 Nm)		-	-
Connectable section	Flexible conductors min/max	mm²	1x0,75/4 - 2x0,75/2,5			2x2,5/10			2,5/35		-	-
		AWG	10 - 18			14 - 6			14 - 3		-	-
	Solid conductors min/max	mm²	1x0,75/4 - 2x0,75/2,5			2x2,5/10			2,5/35		-	-
		AWG	10 - 18			14 - 6			14 - 3		-	-
Contacts			Double breaking			Double breaking			Double breaking		Double breaking	Double breaking
Opening angles			30° - 45° - 60° - 90°			30° - 45° - 60° - 90°			45° - 60° - 90°		60° - 90°	60° - 90°
Mechanical lifetime at 120 operations for hour		mil./cl	1	1	1	1	1	1	1	1	0,1	0,1
Electrical lifetime at 120 operations for hour		mil./cl	1	0,75	0,75	1	0,75	0,75	0,5	0,25	0,01	0,01
CERTIFICATIONS			P012 PX12	P016 PX16	P020 PX20	C025 CX25	C032 CX32	C040 CX40	C063	C080	G125	G200
CE	CE mark - Europe		■	■	■	■	■	■	■	■	■	■
cUL	cUL Listed - USA and Canada		●	●	●	●	●	●	●	●	●	●
IMQ	IMQ Istituto Marchio Qualità - Italy		●	●	●	●	●	●	●	●	●	●
CCC	CCC Cina		●	●	●	●	●	●	●	●	●	●
EAC	EAC Russia		●	●	●	●	●	●	●	●	●	●

■ Comply to the requirements by passed test. ● Approved.


Changeover Cam Switches, Type R, Door or Thru Panel Mounting

EN 60947-3 CHARACTERISTICS			P012 - PX12	P016 - PX16	P020 - PX20	C025 - CX25	C032 - CX32	C040 - CX40	C063	C080	G125	G200
Rated operating voltage Ue	V		690	690	690	690	690	690	690	690	690	690
Rated insulation voltage Ui	V		690	690	690	690	690	690	690	690	690	690
Rated impulse withstand voltage Uimp (sectionable)	kV		4	4	4	5	5	6	8	8	6	6
Rated thermal current Ith	A		16	20	25	32	40	50	85	100	150	225
Rated thermal current in enclosed Ithe	A		12	16	20	25	32	40	85	100	150	225
Frequency	Hz		50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
RATED OPERATING CURRENT Ie: alternate current			P012 - PX12	P016 - PX16	P020 - PX20	C025 - CX25	C032 - CX32	C040 - CX40	C063	C080	G125	G200
AC-21A Switching resistive loads with light overloads	690V	A	12	16	20	25	32	40	63	80	125	200
AC-22A Switching mixed resistive and inductive loads at light overloads	690V	A	12	16	20	25	32	40	63	80	125	200
AC-23A Periodic switching of motors	single phase - 1 pole	110V A/kW	12/1,1	14/1,5	18/2	25/1,5	30/2,2	35/3	45/4	63/5,5	-	-
		230V A/kW	12/2,2	14/3	18/4	25/4	30/5,5	35/6,5	45/7,5	63/11	-	-
	3 phases - 3 poles	230V A/kW	10/3	14/4	16/5	25/7,5	30/9	35/11	50/15	58/18,5	140/45	169/55
		400V A/kW	10/5,5	14/7,5	16/9	22/11	24/15	32/18,5	40/22	54/30	78/45 (415V)	95/55 (415V)
		500V A/kW	10/7,5	14/10	16/11	22/11	27/18,5	32/22	40/30	54/37	65/45	79/55
		690V A/kW	10/7,5	14/10	16/12,5	20/15	22/18,5	25/22	32/30	40/37	47/45	57/55
AC3 Starting of cage motors (interruption hile running)	single phase - 2 poles	110V A/kW	10/0,75	12/1,1	16/1,5	22/1,1	25/1,5	30/2,5	36/3,7	45/4	-	-
		230V A/kW	10/2	12/2,2	16/3,5	22/3,7	25/4	30/5,5	36/6,5	45/7,5	-	-
	3 phases - 3 poles	230V A/kW	8/2,2	10/3	12/4	18/5,5	23/7,5	27/9	37/11	47/15	115/37	140/45
		400V A/kW	8/4	10/5	12/6	18/7,5	23/11	27/15	35/18,5	44/22	64/37 (415V)	78/45 (415V)
		500V A/kW	8/5,5	10/7,5	12/8	18/11	23/15	27/18,5	35/22	44/30	53/37	64/45
		690V A/kW	6/5,5	8/7,5	10/9	14/11	18/15	20/18,5	25/22	32/30	39/37	47/45
Nominal interruption power AC-23A (cosφ 0,45)		230V A	80	104	128	200	240	280	400	464	-	-
		400V A	80	104	128	176	216	256	320	432	-	-
		500V A	80	112	128	176	216	256	320	432	-	-
		690V A	80	112	128	160	176	200	256	320	-	-
Power dissipation for each pole	W		0,3*	0,35*	0,4*	-	-	-	-	-	-	-
RATED OPERATING CURRENT Ie: direct current			P012 - PX12	P016 - PX16	P020 - PX20	C025 - CX25	C032 - CX32	C040 - CX40	C063	C080	G125	G200
DC-21A Switching resistive loads with light overloads	50V (1 phase)	A	10	12	16	20 ▼	25 ▼	32 ▼	-	-	-	-
DC-22A Switching mixed resistive and inductive loads at light overloads	30V (1 phase)	A	8	10	12	16 ▼	20 ▼	25 ▼	-	-	-	-
SHORT CIRCUIT CHARACTERISTICS			P012 - PX12	P016 - PX16	P020 - PX20	C025 - CX25	C032 - CX32	C040 - CX40	C063	C080	G125	G200
Rated short-time short circuit withstand current Icw (1 s)	A		300	300	300	500	500	500	1200	1200	-	-
Rated short circuit making capacity Icm	A		1200	1200	1200	2840	2840	2840	2000	2000	-	-
Conditional rated short circuit withstand current	kA		5	5	5	10	10	10	10	10	20	20
Fuse rating gG	690V	A	20	20	20	40 ■	40 ■	40 ■	100	100	125 ▲	200 ▲
UL 508 CHARACTERISTICS			P012 - PX12	P016 - PX16	P020 - PX20	C025 - CX25	C032 - CX32	C040 - CX40	C063	C080	G125	G200
General Use	600V AC	A	12	16	20	25	32	40	63	85	125	175
Standard motor load	single phase - 2 poles	120V AC HP (FLA)	0,5 (9,8)	1 (16)	1,5 (20)	1,5 (20)	2 (24)	3 (34)	5 (56)	5 (56)	-	-
		240V AC HP (FLA)	1 (8)	1,5 (10)	2 (12)	3 (17)	5 (28)	5 (28)	7,5 (40)	10 (50)	-	-
	3 phases - 3 poles	200V AC HP (FLA)	1,5 (6,9)	3 (11,04)	5 (17,5)	7,5 (25,3)	7,5 (25,3)	10 (32,2)	-	-	10 (56)	15 (84)
		240V AC HP (FLA)	3 (9,6)	5 (15,2)	5 (15,2)	7,5 (22)	7,5 (22)	10 (28)	15 (42)	20 (54)	20 (54)	25 (68)
		480V AC HP (FLA)	5 (7,6)	7,5 (11)	10 (14)	15 (21)	20 (27)	20 (27)	30 (40)	40 (52)	40 (52)	50 (65)
		600V AC HP (FLA)	5 (6,1)	7,5 (9)	10 (11)	15 (17)	20 (22)	20 (22)	40 (41)	50 (52)	50 (52)	50 (52)


▼ Values not reported on the IMQ files. ■ Fuses type gG 40a 500V ▲ Fuses type gG/Gm

Changeover Cam Switches, Type R, Door or Thru Panel Mounting


| RANGE AC21A | 12A - 16A - 20A |

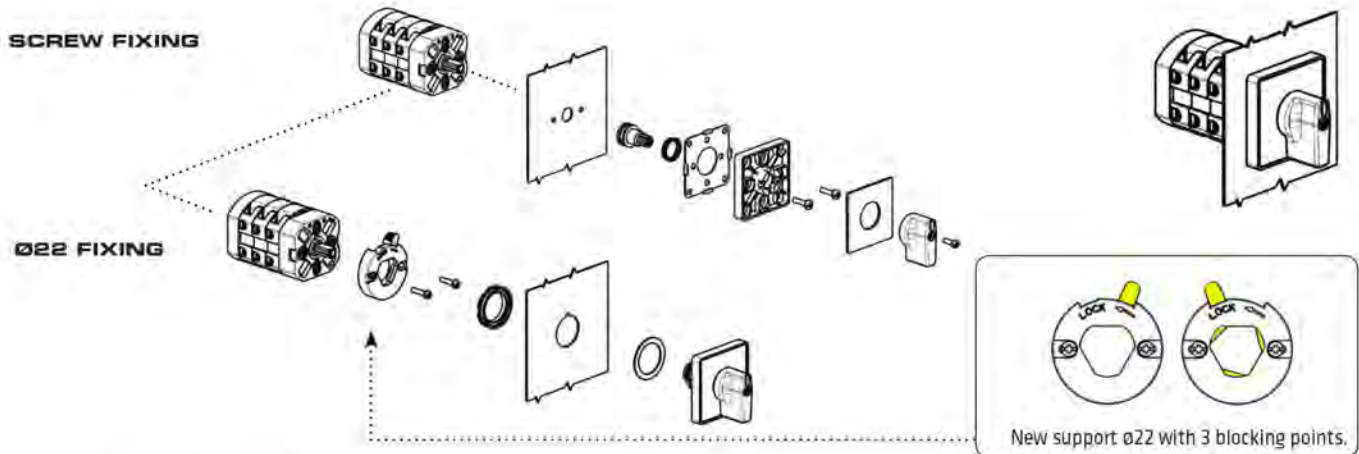

| RANGE AC21A | 25A - 32A - 40A |

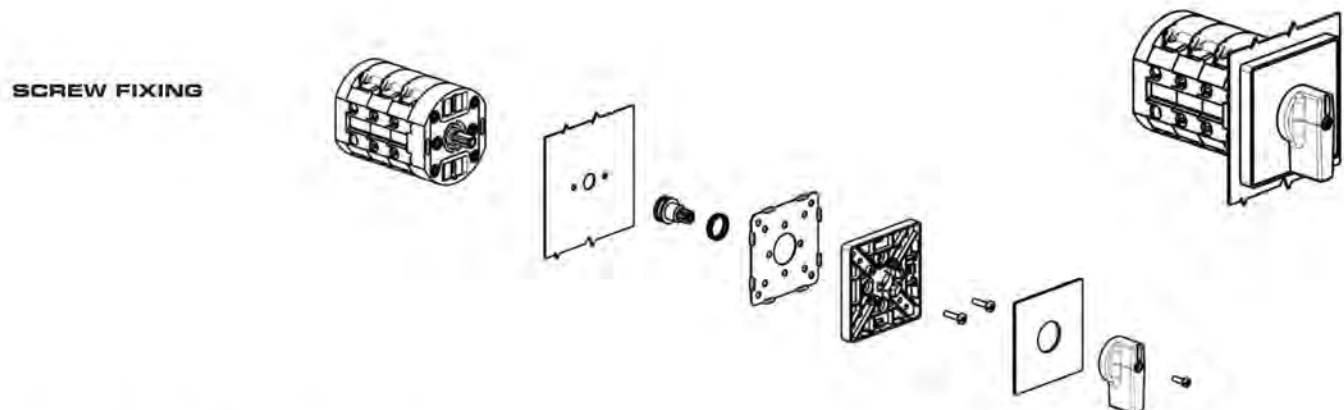


| RANGE AC21A | 63A - 80A |

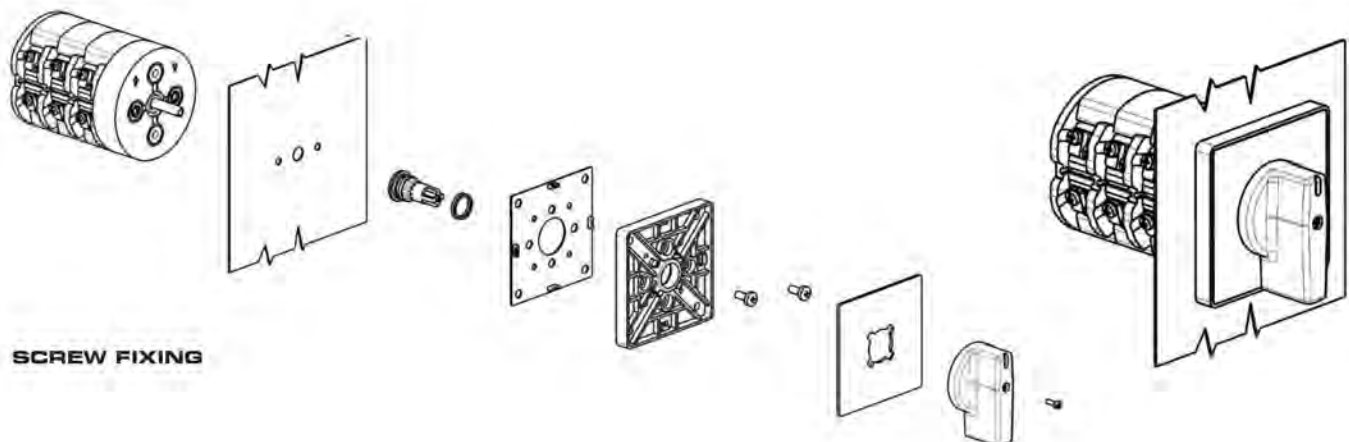

Changeover Cam Switches, Type R, Door or Thru Panel Mounting


| RANGE AC21A | 125A |

SCREW FIXING


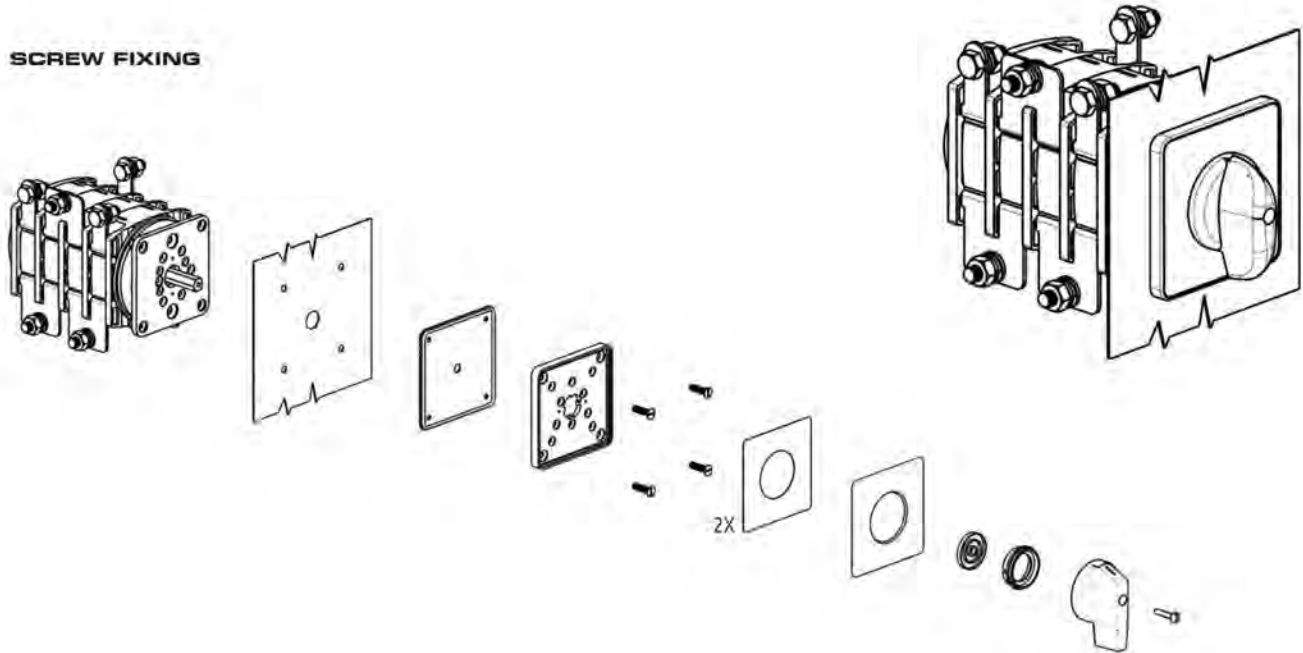


| RANGE AC21A | 200A |

SCREW FIXING

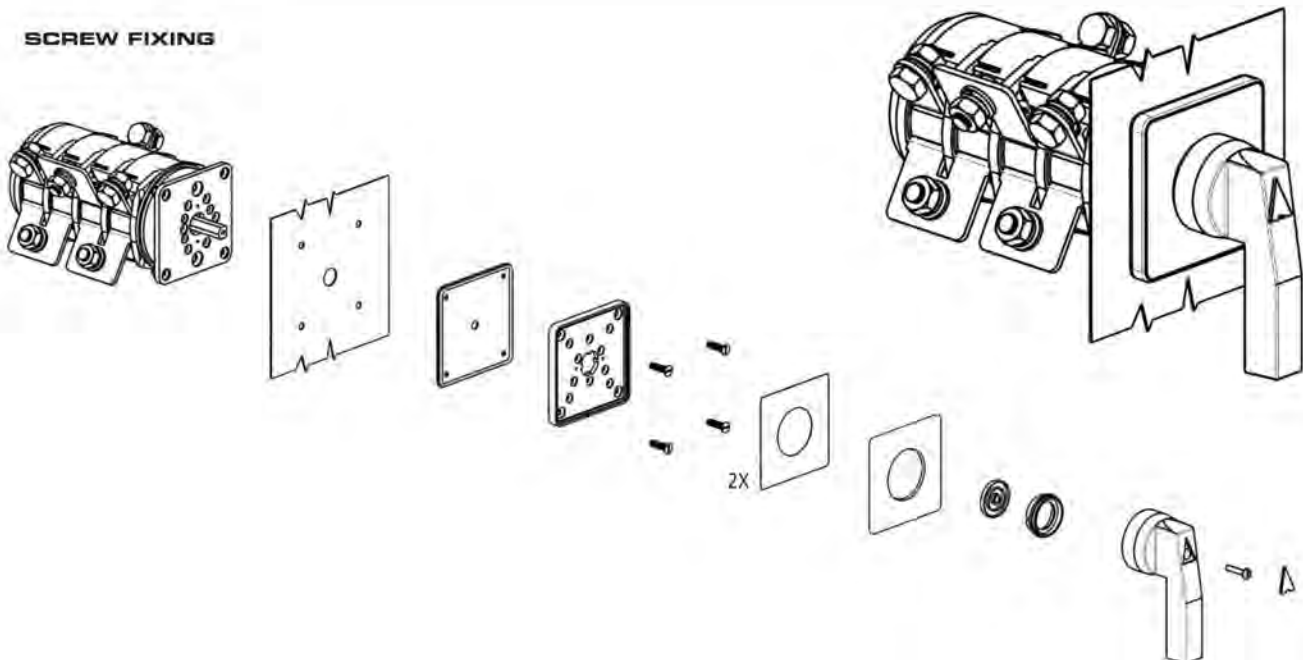

Changeover Cam Switches, Type R, Door or Thru Panel Mounting

	12-16-20A	 45°  60° G125 G200	 45°  60° G125 G200	 45°  60° G125 G200	 45°  60° G125 G200																																																																																																
	25-32-40A																																																																																																				
	63-80A																																																																																																				
	125A	<table border="1"> <tr><td>1</td><td>3-4</td><td></td><td>X</td></tr> <tr><td></td><td>1-2</td><td>X</td><td></td></tr> <tr><td>W&E</td><td>CONT</td><td>1</td><td>0 2</td></tr> </table>	1	3-4		X		1-2	X		W&E	CONT	1	0 2	<table border="1"> <tr><td>2</td><td>7-8</td><td></td><td>X</td></tr> <tr><td></td><td>5-6</td><td>X</td><td></td></tr> <tr><td>1</td><td>3-4</td><td></td><td>X</td></tr> <tr><td></td><td>1-2</td><td>X</td><td></td></tr> <tr><td>W&E</td><td>CONT</td><td>1</td><td>0 2</td></tr> </table>	2	7-8		X		5-6	X		1	3-4		X		1-2	X		W&E	CONT	1	0 2	<table border="1"> <tr><td>3</td><td>11-12</td><td></td><td>X</td></tr> <tr><td></td><td>9-10</td><td>X</td><td></td></tr> <tr><td>2</td><td>7-8</td><td></td><td>X</td></tr> <tr><td></td><td>5-6</td><td>X</td><td></td></tr> <tr><td>1</td><td>3-4</td><td></td><td>X</td></tr> <tr><td></td><td>1-2</td><td>X</td><td></td></tr> <tr><td>W&E</td><td>CONT</td><td>1</td><td>0 2</td></tr> </table>	3	11-12		X		9-10	X		2	7-8		X		5-6	X		1	3-4		X		1-2	X		W&E	CONT	1	0 2	<table border="1"> <tr><td>4</td><td>15-16</td><td></td><td>X</td></tr> <tr><td></td><td>13-14</td><td>X</td><td></td></tr> <tr><td>3</td><td>11-12</td><td></td><td>X</td></tr> <tr><td></td><td>9-10</td><td>X</td><td></td></tr> <tr><td>2</td><td>7-8</td><td></td><td>X</td></tr> <tr><td></td><td>5-6</td><td>X</td><td></td></tr> <tr><td>1</td><td>3-4</td><td></td><td>X</td></tr> <tr><td></td><td>1-2</td><td>X</td><td></td></tr> <tr><td>W&E</td><td>CONT</td><td>1</td><td>0 2</td></tr> </table>	4	15-16		X		13-14	X		3	11-12		X		9-10	X		2	7-8		X		5-6	X		1	3-4		X		1-2	X		W&E	CONT	1	0 2
1	3-4		X																																																																																																		
	1-2	X																																																																																																			
W&E	CONT	1	0 2																																																																																																		
2	7-8		X																																																																																																		
	5-6	X																																																																																																			
1	3-4		X																																																																																																		
	1-2	X																																																																																																			
W&E	CONT	1	0 2																																																																																																		
3	11-12		X																																																																																																		
	9-10	X																																																																																																			
2	7-8		X																																																																																																		
	5-6	X																																																																																																			
1	3-4		X																																																																																																		
	1-2	X																																																																																																			
W&E	CONT	1	0 2																																																																																																		
4	15-16		X																																																																																																		
	13-14	X																																																																																																			
3	11-12		X																																																																																																		
	9-10	X																																																																																																			
2	7-8		X																																																																																																		
	5-6	X																																																																																																			
1	3-4		X																																																																																																		
	1-2	X																																																																																																			
W&E	CONT	1	0 2																																																																																																		
	200A																																																																																																				

SERIEs	AC21A	1 POLE	2 POLES	3 POLES	4 POLES
P012	12A	P0120008R	P0120009R	P0120010R	P0120011R
P016	16A	P0160008R	P0160009R	P0160010R	P0160011R
P020	20A	P0200008R	P0200009R	P0200010R	P0200011R
C025	25A	C0250008R	C0250009R	C0250010R	C0250011R
C032	32A	C0320008R	C0320009R	C0320010R	C0320011R
C040	40A	C0400008R	C0400009R	C0400010R	C0400011R
C063	63A	C0630008R	C0630009R	C0630010R	C0630011R
C080	80A	C0800008R	C0800009R	C0800010R	C0800011R
G125	125A	G1250008R	G1250009R	G1250010R	G1250011R
G200	200A	G2000008R	G2000009R	G2000010R	G2000011R

Changeover Cam Switches, Type R, Door or Thru Panel Mounting

ACTUATOR	FIXING	P012 - P016 - P020		C025 - C032 - C040	C063 - C080	G125	G200
		 45°	 NO	 45°	 45°	 60°	 60°
	screw	001/0008	-	007/0008	201/0008	441/0008	461/0008
	ø22	056X/0008	-	-	-	-	-
	screw	002/0008	-	008/0008	-	-	-
	ø22	058X/0008	-	-	-	-	-
	screw	003/0008	-	003/0008	-	-	-
	ø22	059X/0008	-	-	-	-	-
	screw	004/0008	-	004/0008	-	-	-
	ø22	060X/0008	-	-	-	-	-
	screw	009/0008	-	009/0008	209/0008	-	-
	ø22	061X/0008	-	-	-	-	-
	screw	010/0008	-	010/0008	210/0008	-	-
	ø22	062X/0008	-	-	-	-	-
	ø22	057X/0008-CA	-	-	-	-	-
	ø22	-	028X	-	-	-	-
	ø22	-	029X	-	-	-	-



 UL50 NEMA Type 1-4-4X
 Body mounting rotated by 90°

 Key removable at "0" position
 Key removable at 0° and 180°

Changeover Cam Switches, Type R, Door or Thru Panel Mounting



12-18-20A





WAFER GAP	L x WAFER N°					
	1	2	3	4	5	6
12.7	37.4	50.1	62.8	75.5	88.2	100.9

* If cam switch is provided of external bridge (wafer to wafer) the height will be increased of ~ 2 mm for the lower and upper sides.



25-32-40A





WAFER GAP	L x WAFER N°					
	1	2	3	4	5	6
17.5	42.2	59.7	77.2	94.7	112.2	129.7

* If cam switch is provided of external bridge (wafer to wafer) the height will be increased of ~ 1 mm for the lower and upper sides.





63-80A



WAFER GAP	L x WAFER N°					
	1	2	3	4	5	6
26	59.1	85.1	111.1	137.1	163	189.1





125A



WAFER GAP	L x WAFER N°					
	1	2	3	4	5	6
26	66	92	118	144	170	196



200A

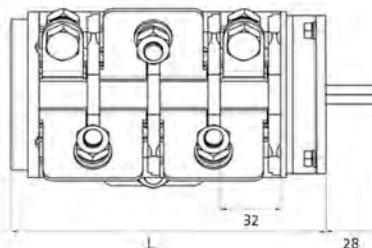

WAFER GAP	L x WAFER N°					
	1	2	3	4	5	6
32	72	104	136	168	200	232

Changeover Cam Switches, Type R, Door or Thru Panel Mounting



FIXING:

Captive M3 bolt - 28 mm

* ALTERNATIVE FIXING

Screwplast 25 or 32 mm




FIXING:

Captive M3 bolt - 32 mm

* ALTERNATIVE FIXING

Screwplast □36 mm



FIXING:

Captive M5 bolt – 40 mm

* ALTERNATIVE FIXING

M5 - 46 mm



FISSAGGIO:

M5 bolt □68 mm

