

# DATA SHEET

## MMBT4401W

### NPN GENERAL PURPOSE SWITCHING TRANSISTOR

**VOLTAGE** 40 Volts

**POWER** 225mW

**SOT-323**


Unit : inch(mm)

#### FEATURES

- NPN epitaxial silicon, planar design
- Collector-emitter voltage  $V_{CE} = 40V$
- Collector current  $I_C = 600mA$
- Lead free in comply with EU RoHS 42331871GW directives
- Green molding compound as per IEC61249 Std. . (Halogen Free)

#### MECHANICAL DATA

- Case: SOT-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx Weight: 0.0048 gram
- Marking: M4A

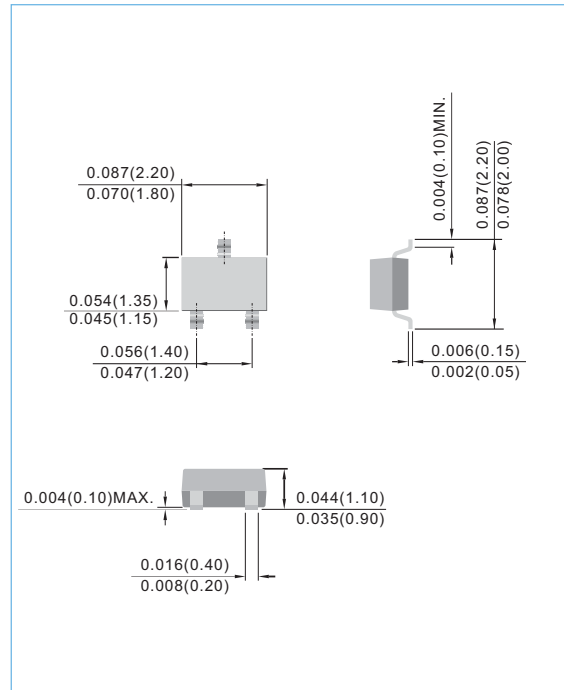

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	Value	UNIT
Collector - Emitter Voltage	$V_{CEO}$	40	V
Collector - Base Voltage	$V_{CBO}$	60	V
Emitter - Base Voltage	$V_{EBO}$	6.0	V
Collector Current - Continuous	$I_C$	600	mA

#### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	Value	UNIT
Max Power Dissipation (Note 1)	$P_{TOT}$	225	mW
Storage Temperature	$T_{STG}$	-55 to 150	
Junction Temperature	$T_J$	-55 to 150	
Thermal Resistance , Junction to Ambient	$R_{JA}$	556	/W

Note 1: Transistor mounted on FR-4 board 70 x 60 x 1mm.

**ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C, unless otherwise noted)**

PARAMETER	SYMBOL	Test Condition	MIN.	TYP.	MAX.	UNIT
Collector - Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> =1.0mA, I <sub>B</sub> =0	40	-	-	V
Collector - Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> =100uA, I <sub>E</sub> =0	60	-	-	V
Emitter - Base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> =100uA, I <sub>C</sub> =0	6.0	-	-	V
Base Cutoff Current	I <sub>BL</sub>	V <sub>CE</sub> =35V, V <sub>EB</sub> =0.4V	-	-	100	nA
Collector Cutoff Current	I <sub>CEX</sub>	V <sub>CE</sub> =35V, V <sub>EB</sub> =0.4V	-	-	100	nA
DC Current Gain	h <sub>FE</sub>	I <sub>C</sub> =0.1mA, V <sub>CE</sub> =1.0V	20	-	-	
		I <sub>C</sub> =1.0mA, V <sub>CE</sub> =1.0V	40	-	-	
		I <sub>C</sub> =10mA, V <sub>CE</sub> =1.0V	80	-	-	
		I <sub>C</sub> =150mA, V <sub>CE</sub> =1.0V	100	-	300	
		I <sub>C</sub> =500mA, V <sub>CE</sub> =2.0V	40	-	-	
Collector - Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> =150mA, I <sub>B</sub> =15 mA	-	-	0.4	V
		I <sub>C</sub> =500mA, I <sub>B</sub> =50mA	-	-	0.75	
Base - Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA	0.75	-	0.95	V
		I <sub>C</sub> =500mA, I <sub>B</sub> =50mA	-	-	1.2	
Collector - Base Capacitance	C <sub>CBO</sub>	V <sub>CB</sub> =5V, I <sub>E</sub> =0, f=1MHz	-	-	6.5	pF
Emitter - Base Capacitance	C <sub>EBO</sub>	V <sub>CB</sub> =0.5V, I <sub>C</sub> =0, f=1MHz	-	-	30	pF
Current Gain – Bandwidth Product	F <sub>T</sub>	I <sub>C</sub> =20mA, V <sub>CE</sub> =10V, f=100MHz	250	-	-	MHz
Delay Time	t <sub>d</sub>	V <sub>CC</sub> =30V, V <sub>BE</sub> =2.0V, I <sub>C</sub> =150mA, I <sub>B</sub> =15mA	-	-	15	ns
Rise Time	t <sub>r</sub>	V <sub>CC</sub> =30V, V <sub>BE</sub> =2.0V, I <sub>C</sub> =150mA, I <sub>B1</sub> =15mA	-	-	20	ns
Storage Time	t <sub>s</sub>	V <sub>CC</sub> =30V, I <sub>C</sub> =150mA, I <sub>B1</sub> =I <sub>B2</sub> =15mA	-	-	225	ns
Fall Time	t <sub>f</sub>	V <sub>CC</sub> =3V, I <sub>C</sub> =10mA, I <sub>B1</sub> =I <sub>B2</sub> =15mA	-	-	30	ns


**ELECTRICAL CHARACTERISTICS CURVES**

All Curves TBD

---

## MOUNTING PAD LAYOUT

---

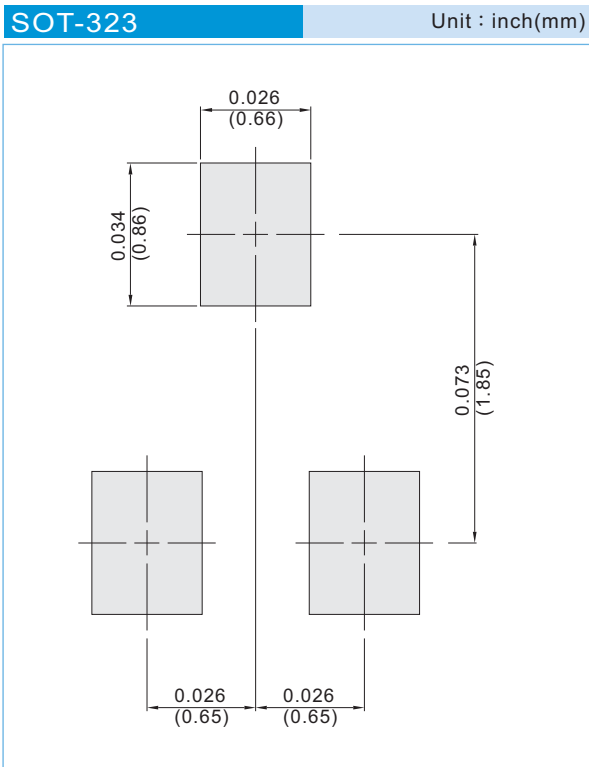

---

## ORDER INFORMATION

---

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

## Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.