

PNP Low-Saturation Transistor

FMMT549

This device is designed with high-current gain and low-saturation voltage with collector currents up to 2 A continuous. Sourced from process PB.

ABSOLUTE MAXIMUM RATINGS

($T_A = 25^\circ\text{C}$ unless otherwise noted.) (Notes 1, 2)

Symbol	Parameter	Value	Unit
V_{CEO}	Collector-Emitter Voltage	-30	V
V_{CBO}	Collector-Base Voltage	-35	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current Continuous Peak Pulse Current	-1 -2	A
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- These ratings are based on a maximum junction temperature of 150°C .
- These are steady-state limits. onsemi should be consulted on applications involving pulsed or low-duty-cycle operations.

THERMAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted.) (Note 3)


Symbol	Parameter	Max	Unit
P_D	Total Device Dissipation, by $R_{\theta JA}$ Derate Above 25°C	500 4	mW mW/ $^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	250	$^\circ\text{C}/\text{W}$

- Device is mounted on FR-4 PCB 4.5 inch x 5 inch, mounting pad 0.02 in² of 2 oz copper.



SOT-23/SUPERSOT™-23
CASE 527AG

MARKING DIAGRAM



549 = Specific Device Code
M = Date Code

ORDERING INFORMATION

Device	Package	Shipping†
FMMT549	SOT-23 (Pb-Free, Halide Free)	3,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

FMMT549

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted.)

Symbol	Parameter	Test Conditions	Min	Max	Unit
BV _{CEO}	Collector–Emitter Breakdown Voltage	I _C = –10 mA, I _B = 0	–30	–	V
BV _{CBO}	Collector–Base Breakdown Voltage	I _C = –100 µA, I _E = 0	–35	–	V
BV _{EBO}	Emitter–Base Breakdown Voltage	I _E = –100 µA, I _C = 0	–5.0	–	V
I _{CBO}	Collector Cut–Off Current	V _{CB} = –30 V, I _E = 0	–	–100	nA
		V _{CB} = –30 V, I _E = 0, T _A = 100°C	–	–10	µA
I _{EBO}	Emitter Cut–Off Current	V _{EB} = –4.0 V, I _C = 0	–	–100	nA
h _{FE}	DC Current Gain (Note 4)	V _{CE} = –2.0 V, I _C = –50 mA	70	–	
		V _{CE} = –2.0 V, I _C = –500 mA	100	300	
		V _{CE} = –2.0 V, I _C = –1 A	80	–	
		V _{CE} = –2.0 V, I _C = –2 A	40	–	
V _{CE(sat)}	Collector–Emitter Saturation Voltage (Note 4)	I _C = –1 A, I _B = –100 mA	–	–500	mV
		I _C = –2 A, I _B = –200 mA	–	–750	
V _{BE(sat)}	Base–Emitter Saturation Voltage (Note 4)	I _C = –1 A, I _B = –100 mA	–	–1.25	V
V _{BE(on)}	Base–Emitter On Voltage (Note 4)	I _C = –1 A, V _{CE} = –2.0 V	–	–1.0	V
f _T	Current Gain Bandwidth Product	I _C = –100 mA, V _{CE} = –5 V, f = 100 MHz	100	–	MHz
C _{obo}	Output Capacitance	V _{CB} = –10 V, I _E = 0, f = 1 MHz	–	25	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse test: pulse width ≤ 300 µs, duty cycle ≤ 2.0%.

TYPICAL PERFORMANCE CHARACTERISTICS

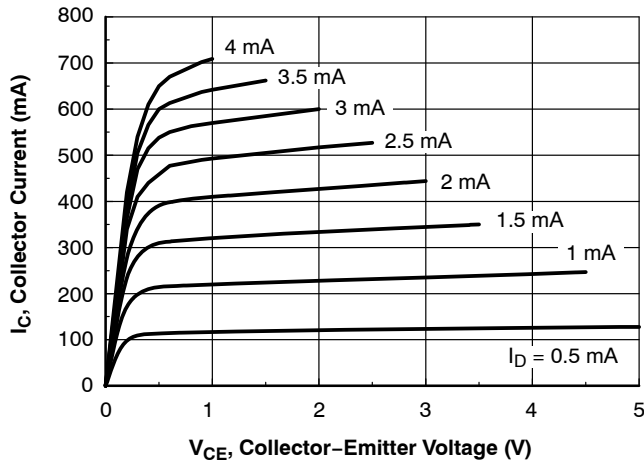


Figure 1. Collector-Emitter Voltage vs. Collector Current

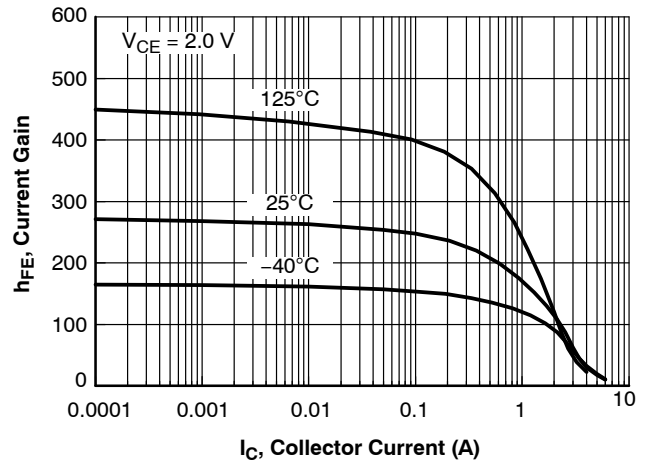


Figure 2. Current Gain vs. Collector Current

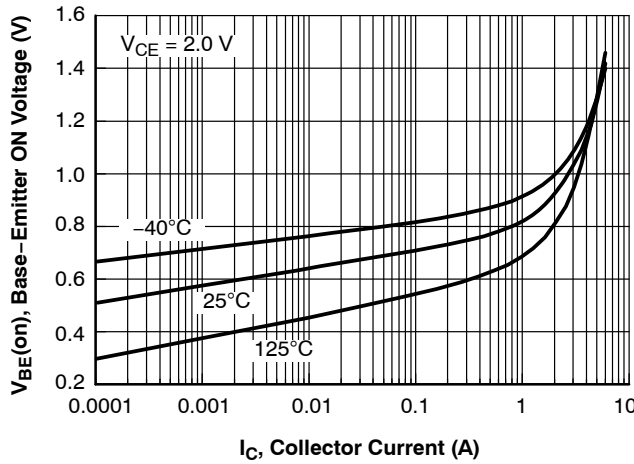


Figure 3. Base-Emitter On Voltage vs. Collector Current

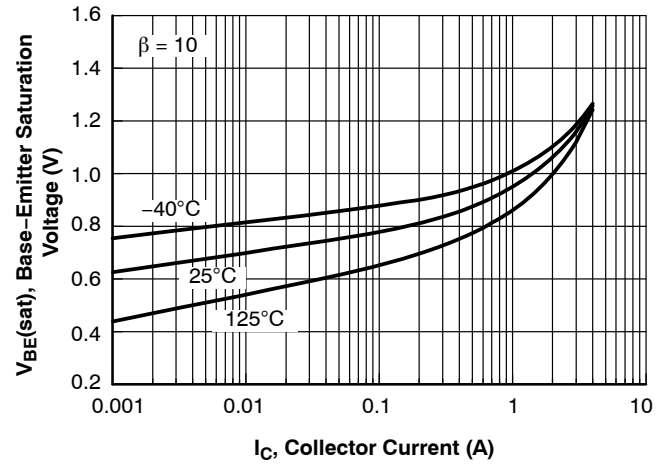


Figure 4. Base-Emitter Saturation Voltage vs. Collector Current

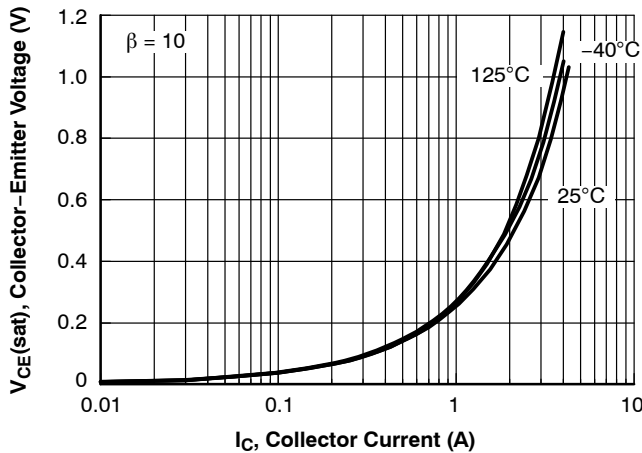


Figure 5. Collector-Emitter Saturation Voltage vs. Collector Current







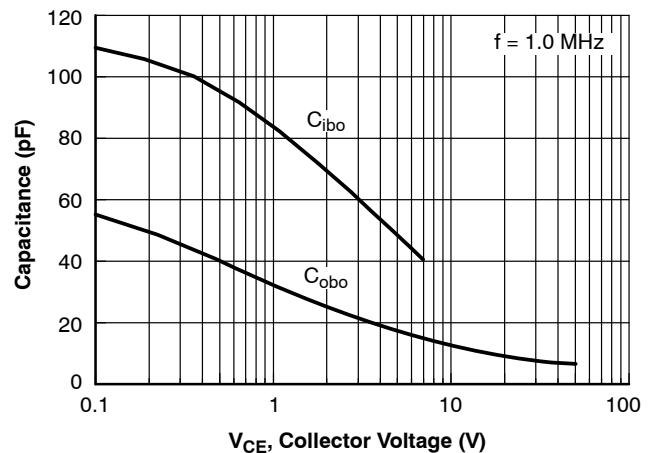



Figure 6. Input / Output Capacitance vs. Reverse Bias Voltage


SOT-23/SUPERSOT™ –23, 3 LEAD, 1.4x2.9
CASE 527AG
ISSUE A

DATE 09 DEC 2019

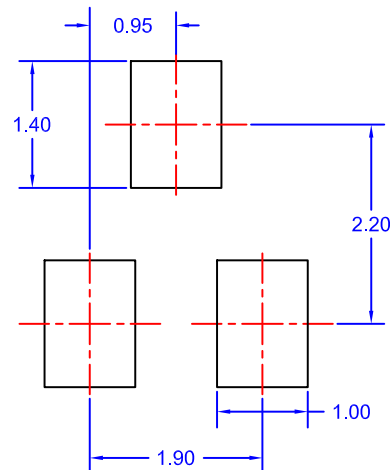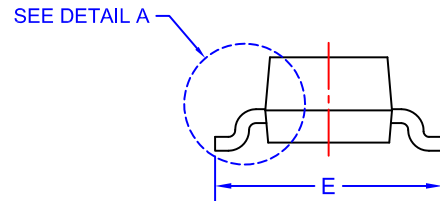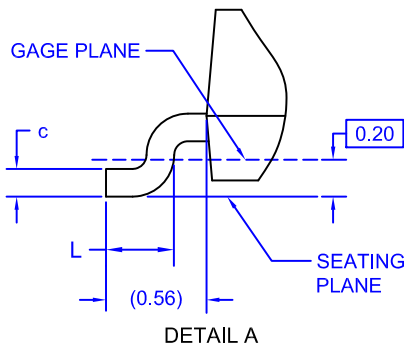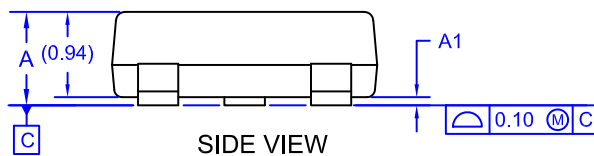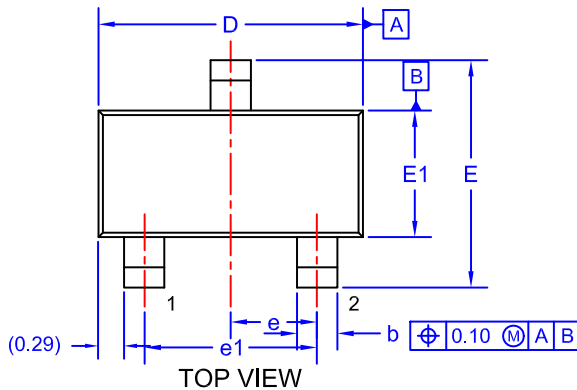

*FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

GENERIC MARKING DIAGRAM*


XXX = Specific Device Code
M = Month Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON34319E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOT-23/SUPERSOT-23, 3 LEAD, 1.4X2.9	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales