## **NSR0340P2**

# **40 V Schottky Barrier Diode**

Schottky barrier diodes are optimized for very low forward voltage drop and low leakage current and are used in a wide range of dc-dc converter, clamping and protection applications in portable devices. NSR0340P2 in a SOD-923 miniature package enables designers to meet the challenging task of achieving higher efficiency and meeting reduced space requirements.

#### **Features**

- Very Low Forward Voltage Drop 420 mV @ 100 mA
- Low Reverse Current 0.6 µA @ 10 V
- Continuous Forward Current 200 mA
- Power Dissipation with Minimum Trace 190 mW
- Very High Switching Speed 3.0 ns @ 10 mA
- Low Capacitance 4 pF @ 5.0 V
- This is a Pb-Free Device

#### **Typical Applications**

- LCD and Keypad Backlighting
- Camera Photo Flash
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping & Protection

#### **Markets**

- Mobile Handsets
- MP3 Players
- Digital Camera and Camcorders
- Notebook PCs & PDAs
- GPS

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Reverse Voltage	$V_R$	40	V
Forward Current (DC)	I <sub>F</sub>	200	mA
Non-Repetitive Peak Forward Surge Current	I <sub>FSM</sub>	1.0	Α
ESD Rating: Human Body Model Machine Model	ESD	Class 2 Class A	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



#### ON Semiconductor®


www.onsemi.com

## 40 V SCHOTTKY BARRIER DIODE





#### MARKING DIAGRAM



R = Specific Device Code

M = Month Code

#### **ORDERING INFORMATION**

Device	Package	Shipping†
NSR0340P2T5G	SOD-923 (Pb-Free)	2 mm Pitch 8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction–to–Ambient (Note 1) Total Power Dissipation @ T <sub>A</sub> = 25°C	$egin{array}{c} R_{ hetaJA} \ P_D \end{array}$	520 190	°C/W mW
Thermal Resistance Junction–to–Ambient (Note 2) Total Power Dissipation @ T <sub>A</sub> = 25°C	R <sub>θJA</sub> PD	175 570	°C/W mW
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +125	°C

- 1. Mounted onto a 4 in square FR-4 board 10 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.
- 2. Mounted onto a 4 in square FR-4 board 1 in sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.

#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
Reverse Leakage (V <sub>R</sub> = 10 V) (V <sub>R</sub> = 40 V)	I <sub>R</sub>		0.6 4.0	5.0 20	μΑ
Forward Voltage (I <sub>F</sub> = 10 mA) (I <sub>F</sub> = 100 mA) (I <sub>F</sub> = 200 mA)	V <sub>F</sub>		290 420 520	320 460 560	mV
Total Capacitance (V <sub>R</sub> = 5.0 V, f = 1 MHz)	СТ		4.0		pF
Reverse Recovery Time $(I_F = I_R = 10 \text{ mA}, I_R = 1.0 \text{ mA})$	t <sub>rr</sub>		3.0		ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

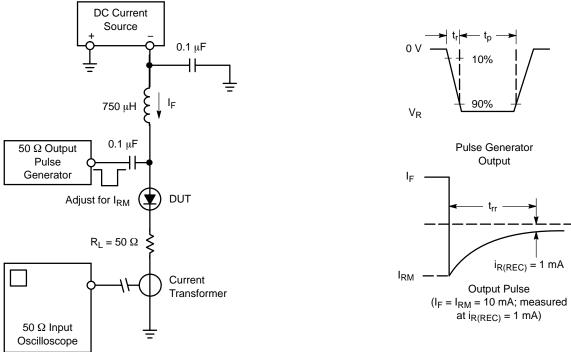



- DC Current Source is adjusted for a Forward Current (I<sub>F</sub>) of 10 mA.
   Pulse Generator Output is adjusted for a Peak Reverse Recovery Current I<sub>RM</sub> of 10 mA.
- Pulse Generator transition time << t<sub>rr</sub>.  $I_{R(REC)}$  is measured at 1 mA. Typically 0.1 X  $I_{RM}$  or 0.25 X  $I_{RM}$ .
- 5. t<sub>p</sub> `» t<sub>rr</sub>

Figure 1. Recovery Time Equivalent Test Circuit

### NSR0340P2

#### **TYPICAL CHARACTERISTICS**

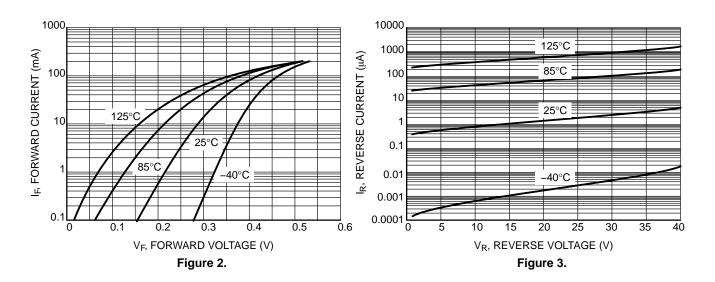

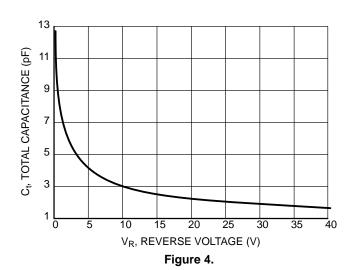






#### SOD-923 0.80x0.60x0.37 CASE 514AB ISSUE E

**DATE 08 FEB 2024** 




В

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
- 5. DIMENSION L WILL NOT EXCEED 0.30mm.

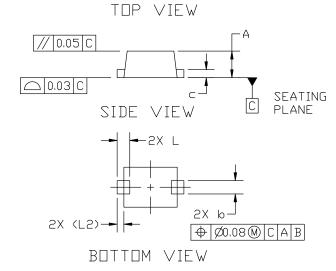


MILLIMETERS				
DIM	MIN.	N□M.	MAX.	
Α	0.34	0.37	0.40	
b	0.15	0.20	0,25	
C	0.07	0.12	0.17	
D	0.75	0.80	0,85	
E	0.55	0,60	0,65	
Н	0.95	1.00	1.05	
Ĺ		0.19 REF	•	
L2	0.05	0.10	0.15	



# RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

# GENERIC MARKING DIAGRAM\*



X = Specific Device Code M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: STYLE 2: NO POLARITY BAND) NO POLARITY 2. ANODE

DOCUMENT NUMBER:	98AON23284D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION	SOD-923 0.80x0.60x0.37		PAGE 1 OF 1

onsemi and ONSeMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales