

CMPA1C1D080F

90 W, 12.75 - 13.25 GHz, GaN MMIC, Power Amplifier

Description

The CMPA1C1D080F is a packaged, 90 W HPA utilizing the high performance, 0.25 um GaN on SiC production process. With a 12.75 - 13.25 GHz operating frequency range targeting satellite communications, the CMPA1C1D080F offers 3rd-order intermodulation performance of -30 dBc at 20 W of total output power. For exceptional thermal management, the HPA is offered in a bolt-down, flange package.



Package Types: 440222
PN's: CMPA1C1D080F

Features


- 90 W typical P_{SAT}
- >21% typical power added efficiency
- 25 dB small signal gain
- 20 W total output power at -30 dBc IM3
- Operation up to 40 V

Note:

Features are typical performance across frequency under 25 °C operation. Please reference performance charts for additional details.

Applications

- Satellite communications uplink

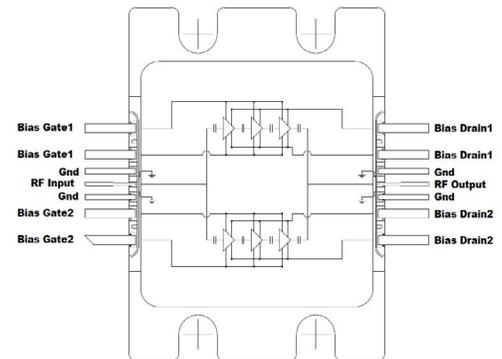

Typical Performance Over 12.75 - 13.25 GHz ($T_c = 25\text{ °C}$)

Parameter	12.75 GHz	13.0 GHz	13.25 GHz	Units
Small Signal Gain ^{1,2}	26.6	25.3	25.2	dB
Output Power ^{1,3}	49.7	49.9	49.7	dBm
Power Gain ^{1,3}	16.7	16.9	16.7	dB
Power Added Efficiency ^{1,3}	23	23	21	%
IM3 ^{1,4}	-27	-27	-27	dBc

Notes:

¹ $V_{DD} = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$.

² Measured at $P_{IN} = -15\text{ dBm}$.

³ Measured at $P_{IN} = 33\text{ dBm}$, CW.

⁴ Measured at 40 dBm P_{OUT} /Tone, 10 MHz.



Absolute Maximum Ratings (Not Simultaneous) at 25 °C

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	V_{DSS}	120	V_{DC}	25 °C
Gate-Source Voltage	V_{GS}	-10, +2	V_{DC}	25 °C
Storage Temperature	T_{STG}	-55, +150	°C	
Maximum Forward Gate Current	I_G	27	mA	25 °C
Maximum Drain Current	I_{DMAX}	13.5	A	
Soldering Temperature	T_S	260	°C	
Junction Temperature	T_J	225	°C	MTTF > 1e6 Hours

Electrical Characteristics (Frequency = 12.75 GHz to 13.25 GHz Unless Otherwise Stated; $T_c = 25 °C$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics						
Gate Threshold Voltage	$V_{GS(TH)}$	-3.1	-2.9	-2.7	V	$V_{DS} = 10 V, I_D = 27 mA$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.65	-	V_{DC}	$V_{DD} = 40 V, I_{DQ} = 750 mA$
Saturated Drain Current ¹	I_{DS}	25.8	26.2	-	A	$V_{DS} = 6.0 V, V_{GS} = 2.0 V$
Drain-Source Breakdown Voltage	V_{BD}	120	-	-	V	$V_{GS} = -8 V, I_D = 27 mA$
RF Characteristics²						
Small Signal Gain	S_{21_1}	-	25	-	dB	$P_{IN} = -15 dBm, Freq = 12.75 - 13.25 GHz$
Output Power	P_{OUT1}	-	49.7	-	dBm	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 12.75 GHz$
Output Power	P_{OUT2}	-	49.9	-	dBm	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.0 GHz$
Output Power	P_{OUT3}	-	49.7	-	dBm	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.25 GHz$
Power Added Efficiency	PAE_1	-	23	-	%	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 12.75 GHz$
Power Added Efficiency	PAE_2	-	23	-	%	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.0 GHz$
Power Added Efficiency	PAE_3	-	21	-	%	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.25 GHz$
Power Gain	G_{P1}	-	16.7	-	dB	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 12.75 GHz$
Power Gain	G_{P2}	-	16.9	-	dB	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.0 GHz$
Power Gain	G_{P3}	-	16.7	-	dB	$V_{DD} = 40 V, I_{DQ} = 750 mA, P_{IN} = 33 dBm, Freq = 13.25 GHz$
Input Return Loss	S11	-	-18.6	-	dB	$P_{IN} = -15 dBm, 12.75 - 13.25 GHz$
Output Return Loss	S22	-	-15.8	-	dB	$P_{IN} = -15 dBm, 12.75 - 13.25 GHz$
IM3	IM3	-	-27	-	dBc	$P_{OUT}/Tone = 40 dBm, 10 MHz Spacing$
Output Mismatch Stress	VSWR	-	-	3:1	Ψ	No Damage at All Phase Angles

Notes:

¹ Scaled from PCM data.² Unless otherwise noted: $P_{IN} = 33 dBm, V_{DD} = 40 V, I_{DQ} = 750 mA, CW$.

Thermal Characteristics

Parameter	Symbol	Rating	Units	Conditions
Operating Junction Temperature	T_J	217	°C	CW, $P_{DISS} = 236 W, T_{CASE} = 85 °C$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.56	°C/W	

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

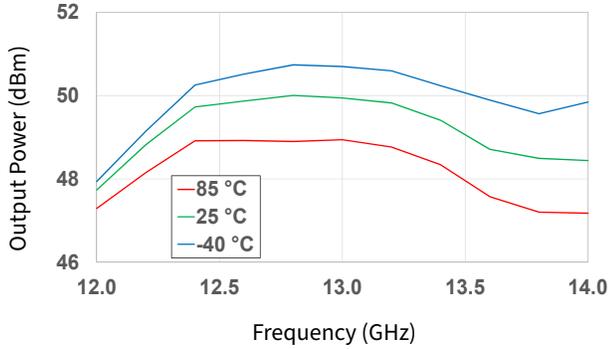


Figure 1. Output Power vs Frequency as a Function of Temperature

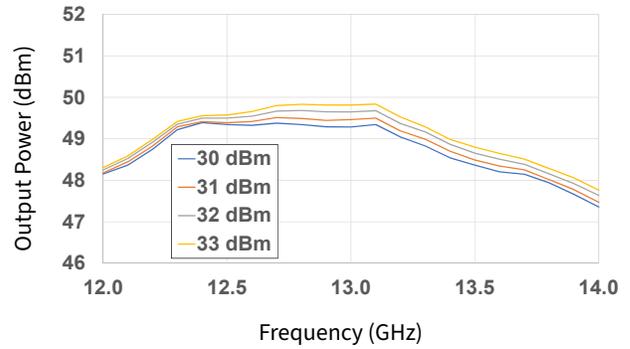


Figure 2. Output Power vs Frequency as a Function of Input Power

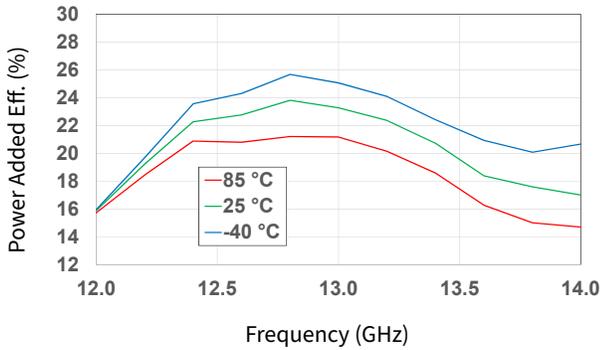


Figure 3. Power Added Eff. vs Frequency as a Function of Temperature

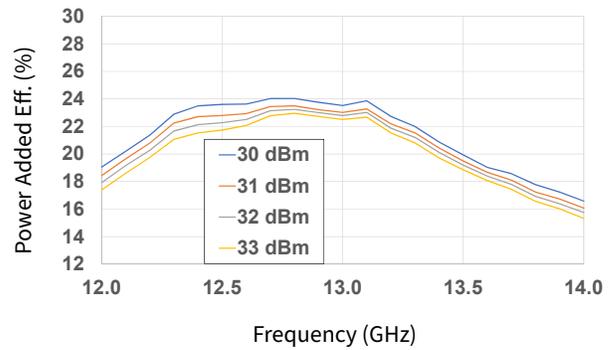


Figure 4. Power Added Eff. vs Frequency as a Function of Input Power

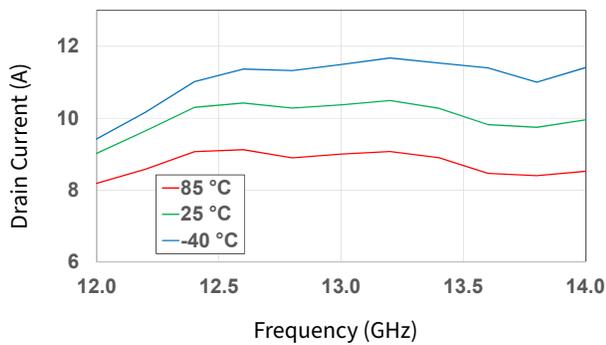


Figure 5. Drain Current vs Frequency as a Function of Temperature

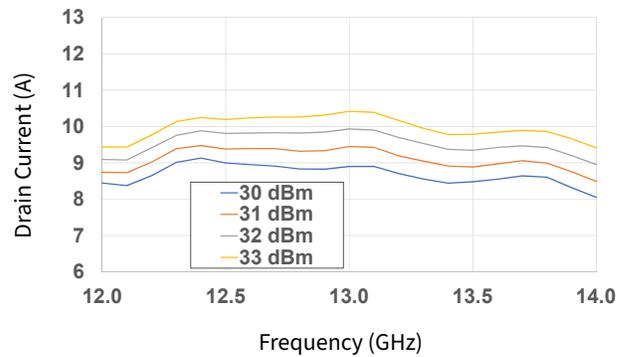


Figure 6. Drain Current vs Frequency as a Function of Input Power

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

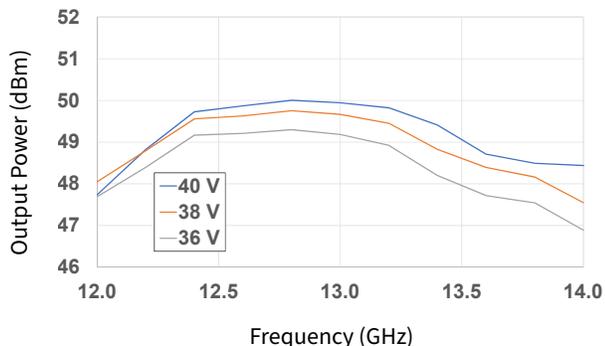


Figure 7. Output Power vs Frequency as a Function of V_D

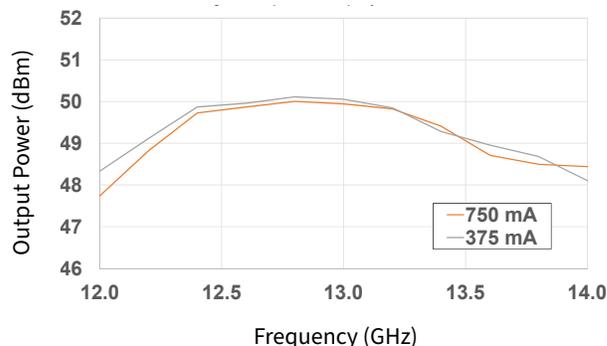


Figure 8. Output Power vs Frequency as a Function of I_{DQ}

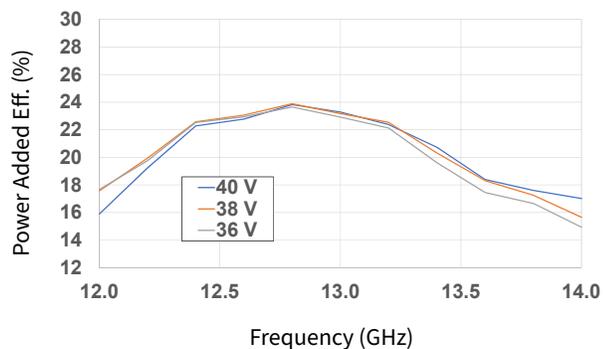


Figure 9. Power Added Eff. vs Frequency as a Function of V_D

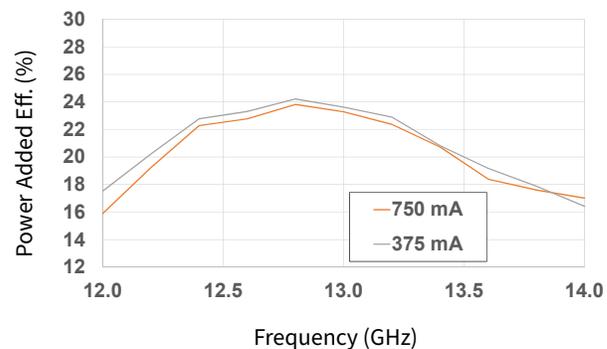


Figure 10. Power Added Eff. vs Frequency as a Function of I_{DQ}

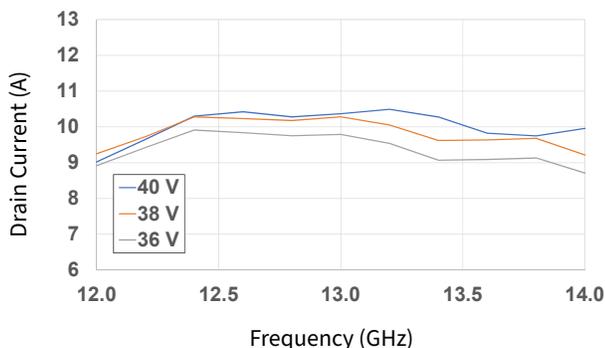


Figure 11. Drain Current vs Frequency as a Function of V_D

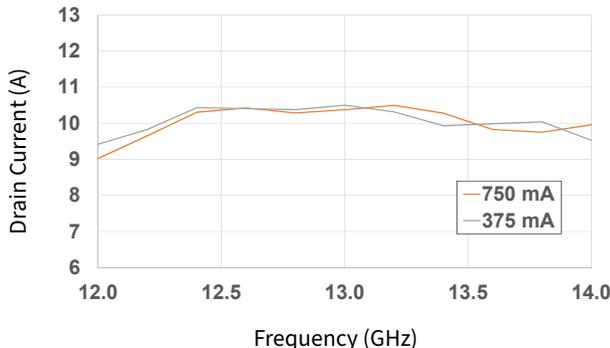


Figure 12. Drain Current vs Frequency as a Function of I_{DQ}

Typical Performance of the CPM1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

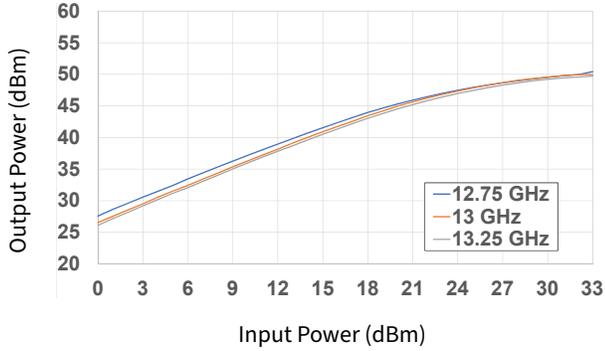


Figure 13. Output Power vs Input Power as a Function of Frequency

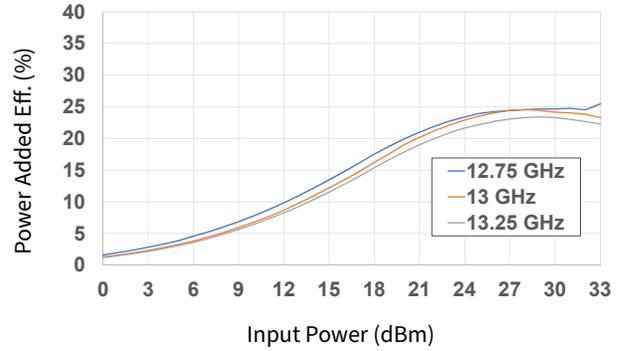


Figure 14. Power Added Eff. vs Input Power as a Function of Frequency

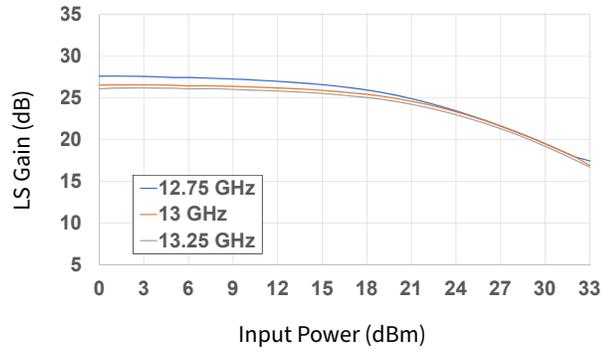


Figure 15. Large Signal Gain vs Input Power as a Function of Frequency

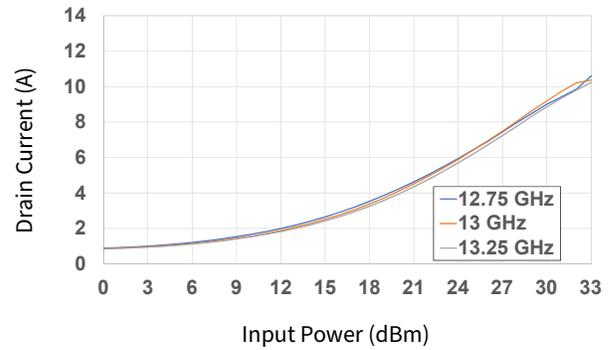


Figure 16. Drain Current vs Input Power as a Function of Frequency

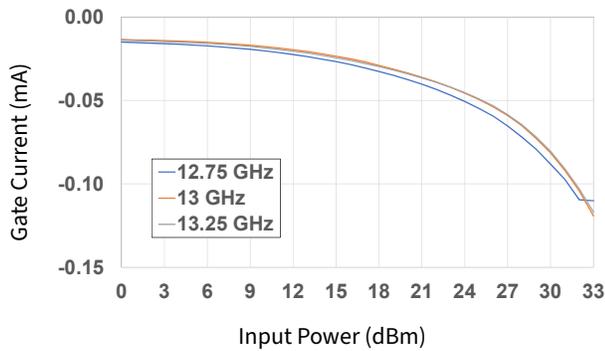


Figure 17. Gate Current vs Input Power as a Function of Frequency

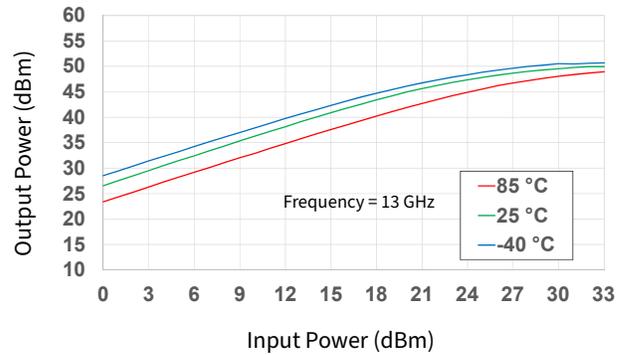


Figure 18. Output Power vs Input Power as a Function of Temperature

Typical Performance of the CPM1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

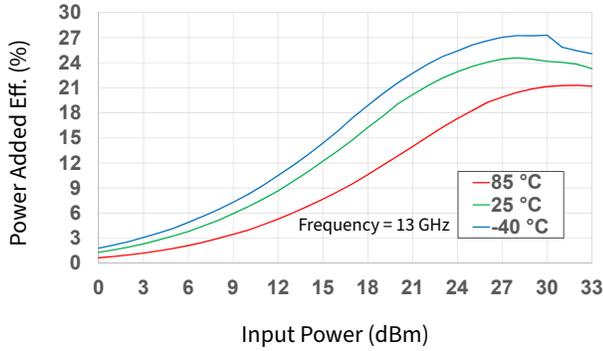


Figure 19. Power Added Eff. vs Input Power as a Function of Temperature

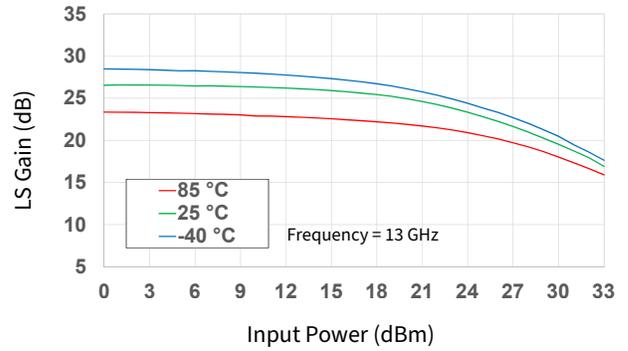


Figure 20. Large Signal Gain vs Input Power as a Function of Temperature

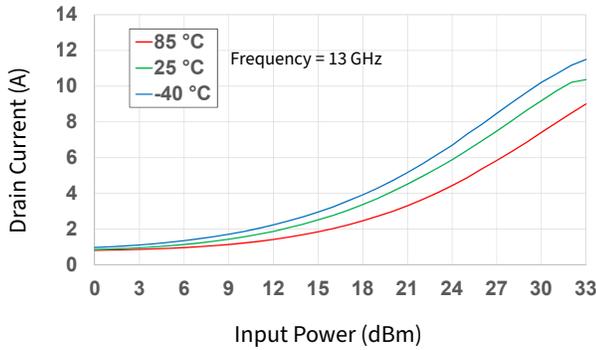


Figure 21. Drain Current vs Input Power as a Function of Temperature

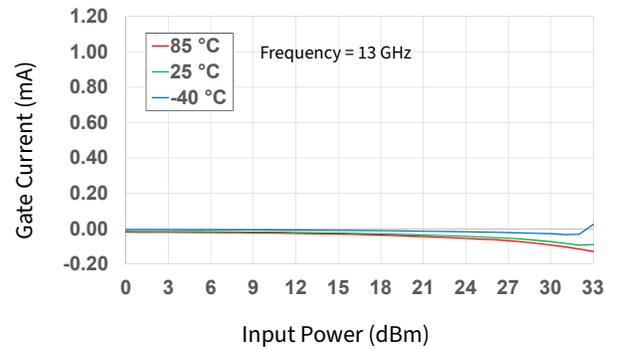


Figure 22. Gate Current vs Input Power as a Function of Temperature

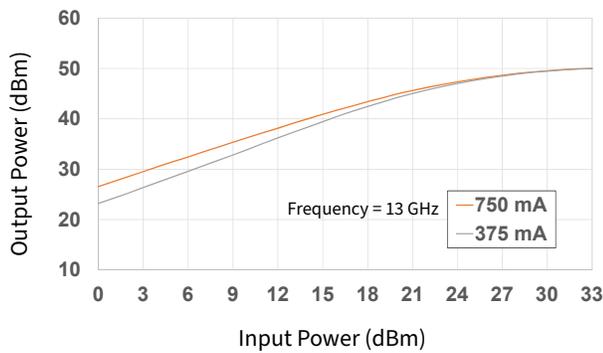


Figure 23. Output Power vs Input Power as a Function of I_{DQ}

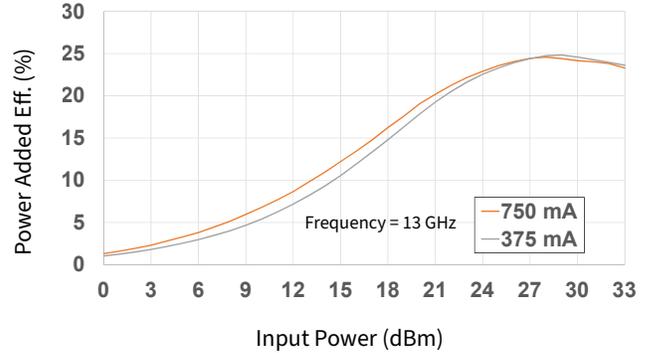


Figure 24. Power Added Eff. vs Input Power as a Function of I_{DQ}

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

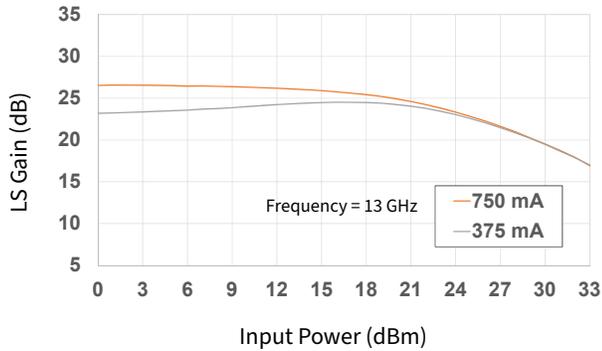


Figure 25. Large Signal Gain vs Input Power as a Function of I_{DQ}

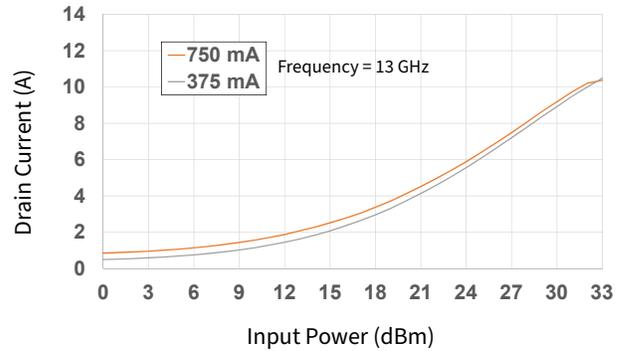


Figure 26. Drain Current vs Input Power as a Function of I_{DQ}

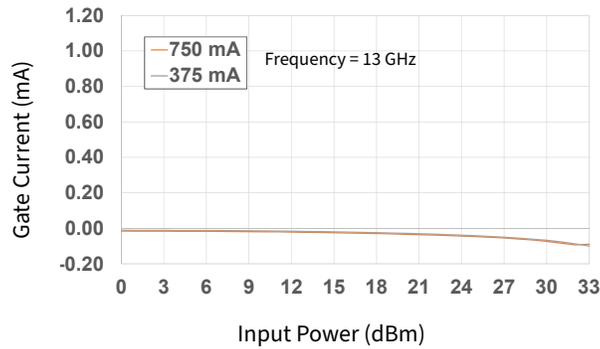


Figure 27. Gate Current vs Input Power as a Function of I_{DQ}

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, $P_{IN} = -15\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

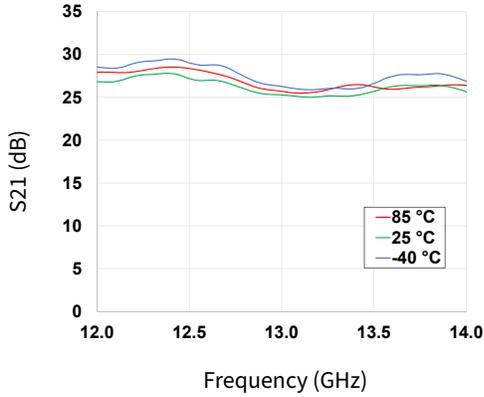


Figure 28. Gain vs Frequency as a Function of Temperature

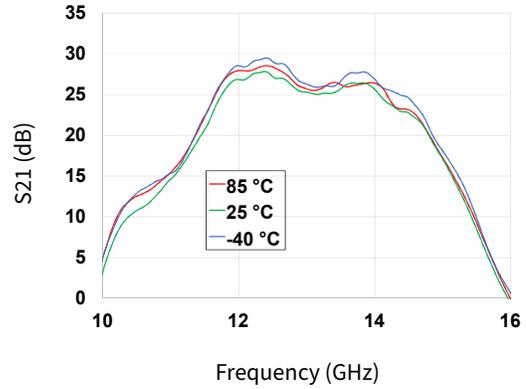


Figure 29. Gain vs Frequency as a Function of Temperature

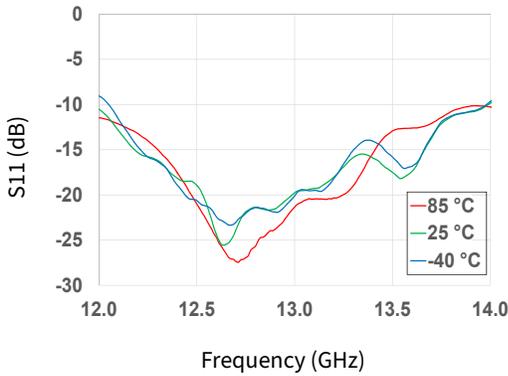


Figure 30. Input RL vs Frequency as a Function of Temperature

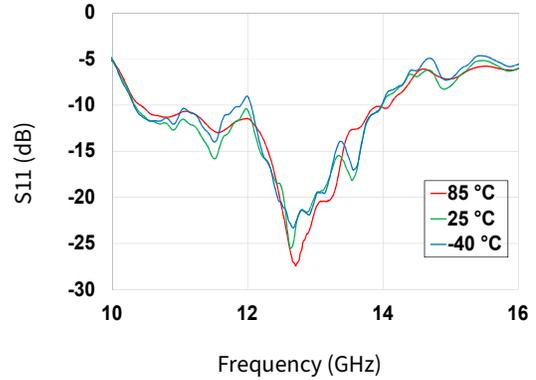


Figure 31. Input RL vs Frequency as a Function of Temperature

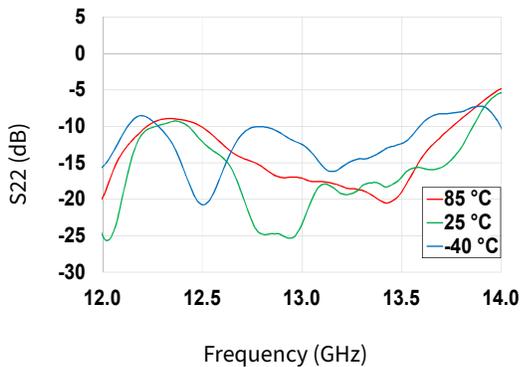


Figure 32. Output RL vs Frequency as a Function of Temperature

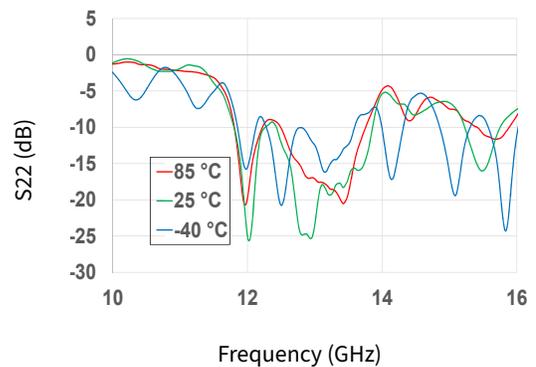


Figure 33. Output RL vs Frequency as a Function of Temperature

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, $P_{IN} = -15\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

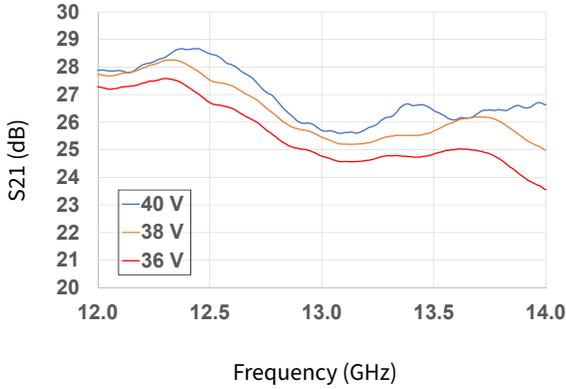


Figure 34. Gain vs Frequency as a Function of Voltage

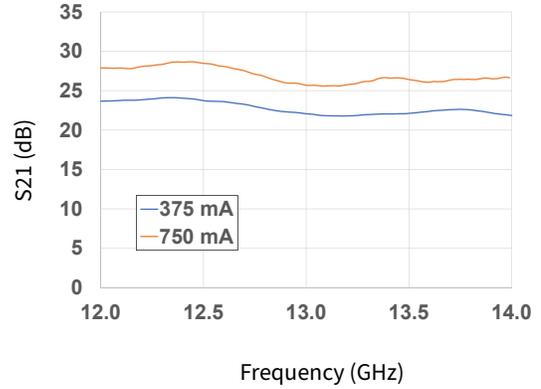


Figure 35. Gain vs Frequency as a Function of I_{DQ}

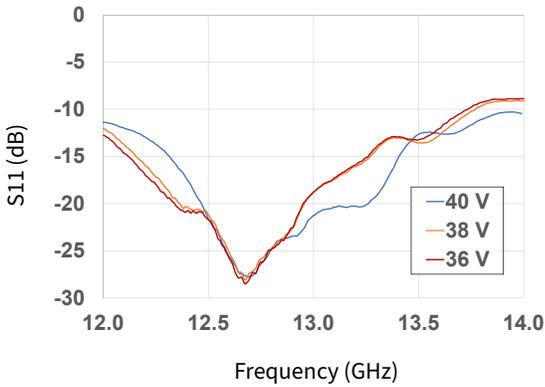


Figure 36. Input RL vs Frequency as a Function of Voltage

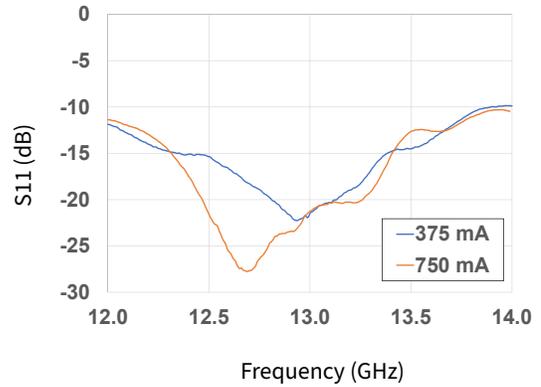


Figure 37. Input RL vs Frequency as a Function of I_{DQ}

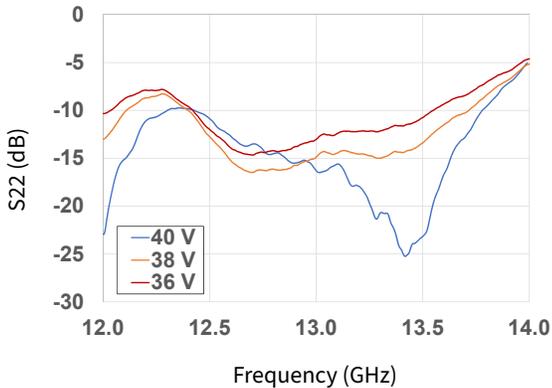


Figure 38. Output RL vs Frequency as a Function of Voltage

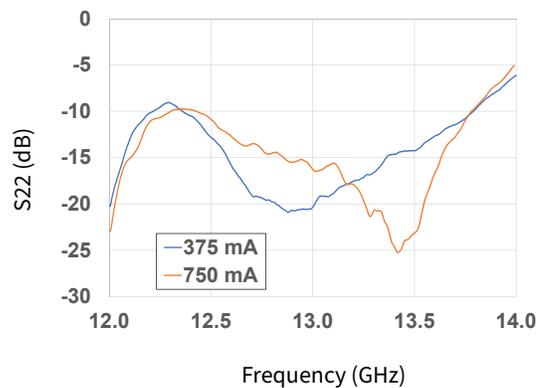


Figure 39. Output RL vs Frequency as a Function of I_{DQ}

Typical Performance of the CPM1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, Tone spacing = 10 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$

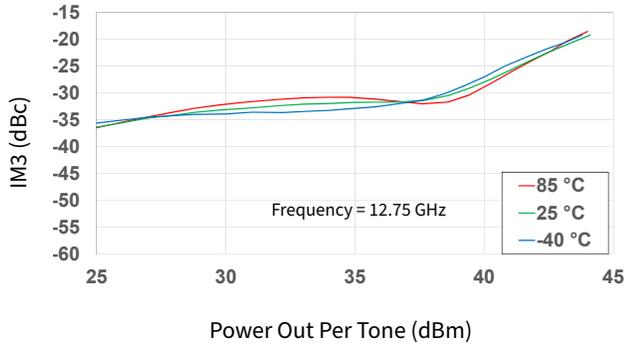


Figure 40. IM3 vs Output Power as a Function of Temperature

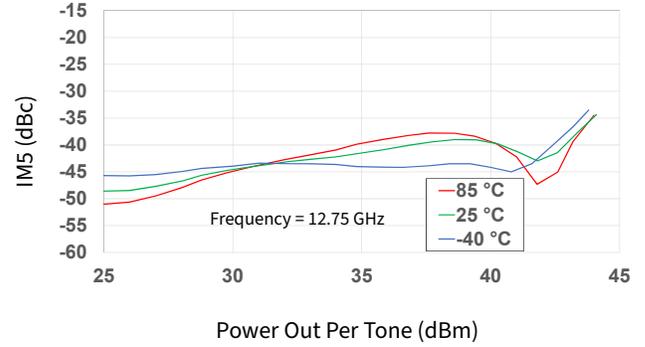


Figure 41. IM5 vs Output Power as a Function of Input Power

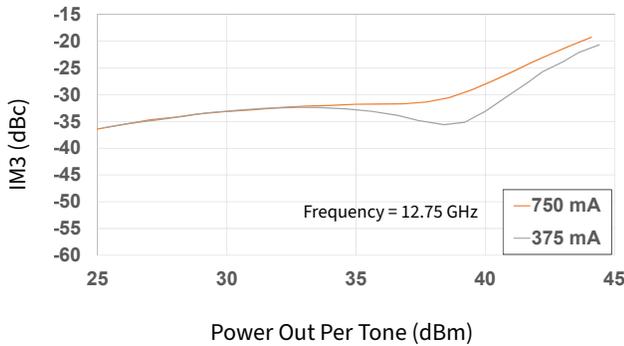


Figure 42. IM3 vs Output Power as a Function of I_{DQ}

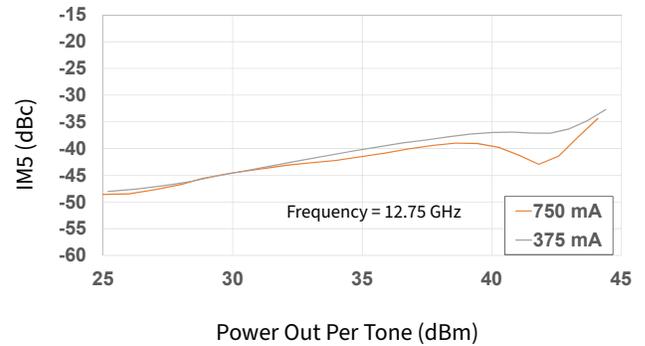


Figure 43. IM5 vs Output Power as a Function of I_{DQ}

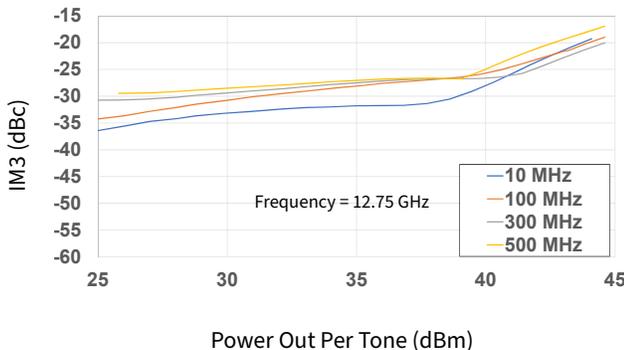


Figure 44. IM3 vs Output Power as a Function of Tone Spacing

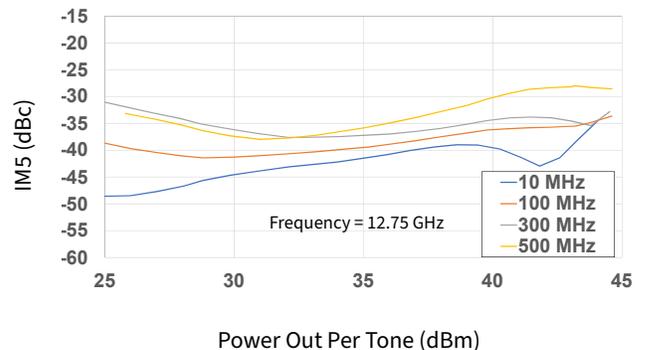


Figure 45. IM5 vs Output Power as a Function of Tone Spacing

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, Tone spacing = 10 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$

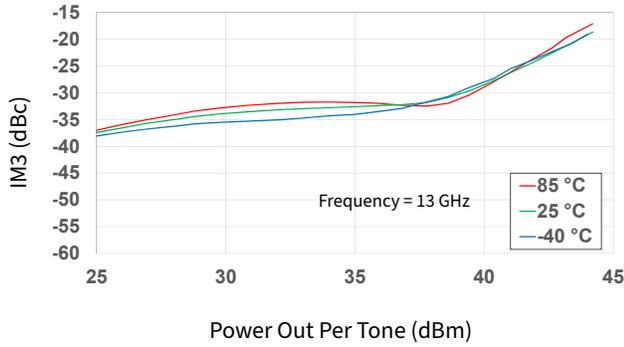


Figure 46. IM3 vs Output Power as a Function of Temperature

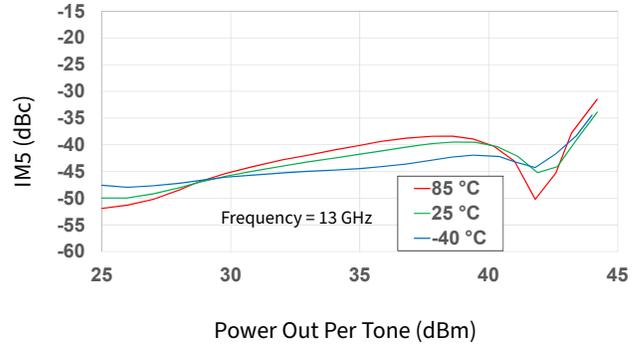


Figure 47. IM5 vs Output Power as a Function of Input Power

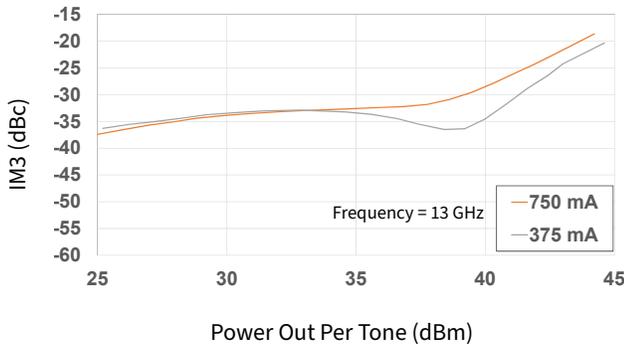


Figure 48. IM3 vs Output Power as a Function of I_{DQ}

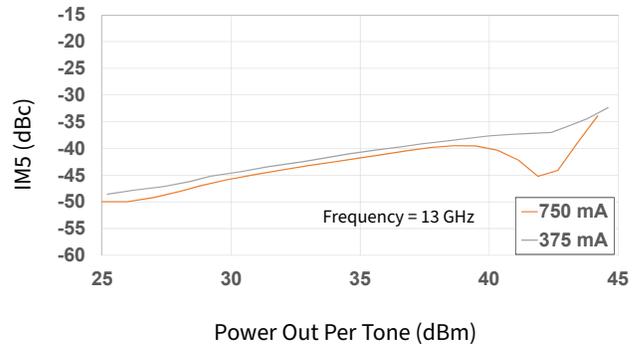


Figure 49. IM5 vs Output Power as a Function of I_{DQ}

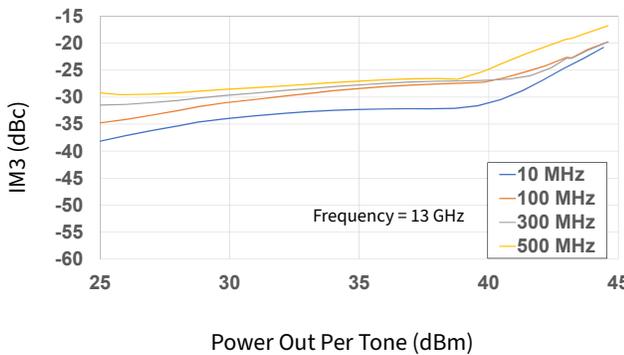


Figure 50. IM3 vs Output Power as a Function of Tone Spacing

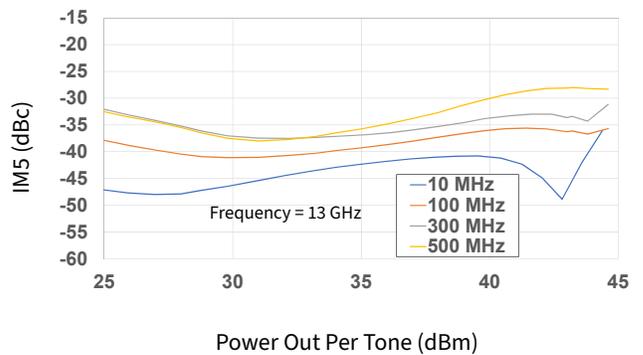


Figure 51. IM5 vs Output Power as a Function of Tone Spacing

Typical Performance of the CPMA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, Tone spacing = 10 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$

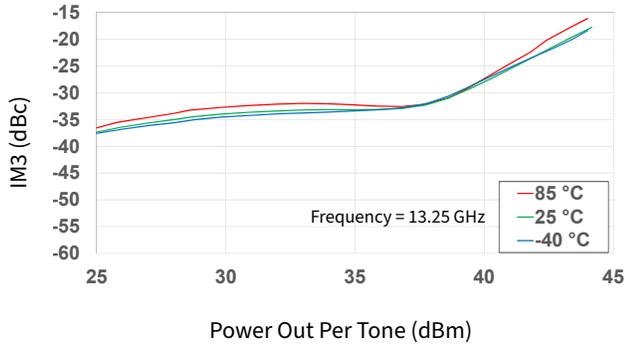


Figure 52. IM3 vs Output Power as a Function of Temperature

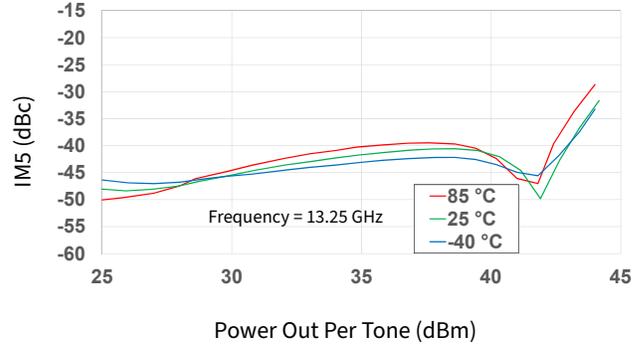


Figure 53. IM5 vs Output Power as a Function of Input Power

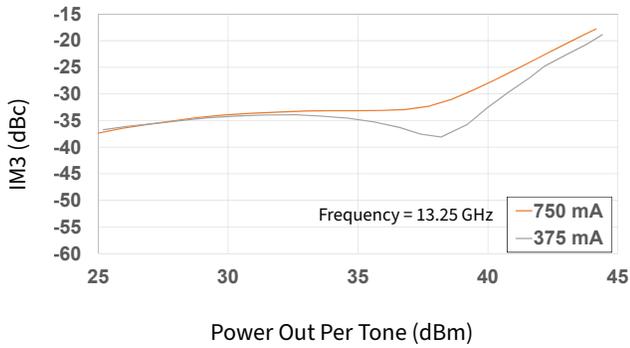


Figure 54. IM3 vs Output Power as a Function of I_{DQ}

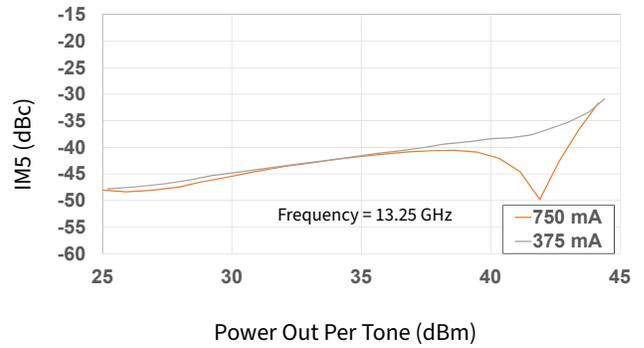


Figure 55. IM5 vs Output Power as a Function of I_{DQ}

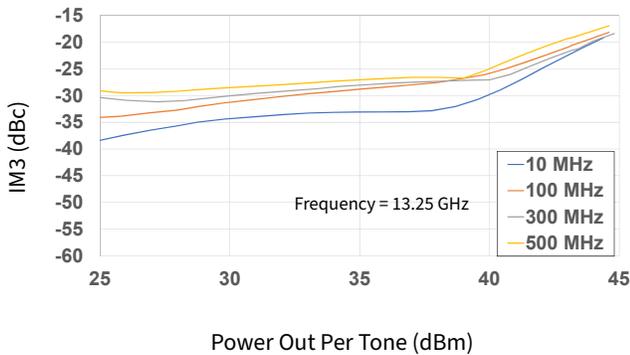


Figure 56. IM3 vs Output Power as a Function of Tone Spacing

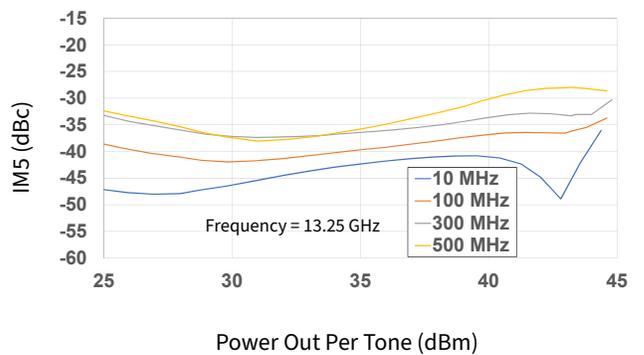


Figure 57. IM5 vs Output Power as a Function of Tone Spacing

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{IN} = 33\text{ dBm}$, Tone spacing = 10 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$

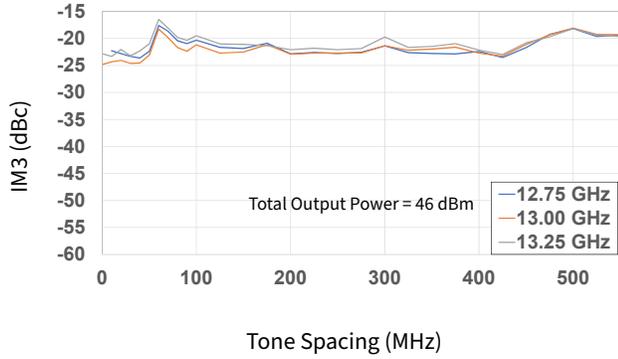


Figure 56. IM3 vs Tone Spacing as a Function of Frequency



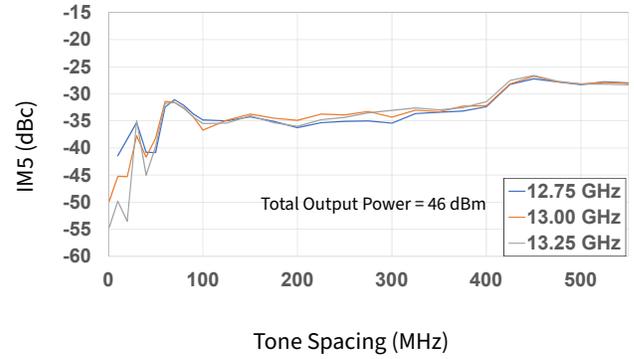


Figure 57. IM5 vs Tone Spacing as a Function of Frequency

CMPA1C1D080F-AMP Evaluation Board Schematic

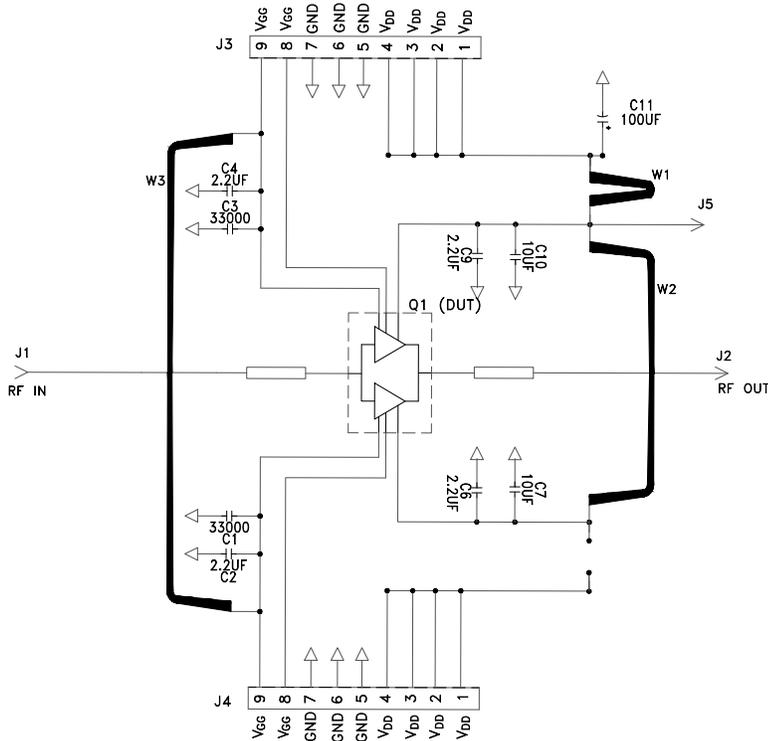

CMPA1C1D080F-AMP Evaluation Board Outline

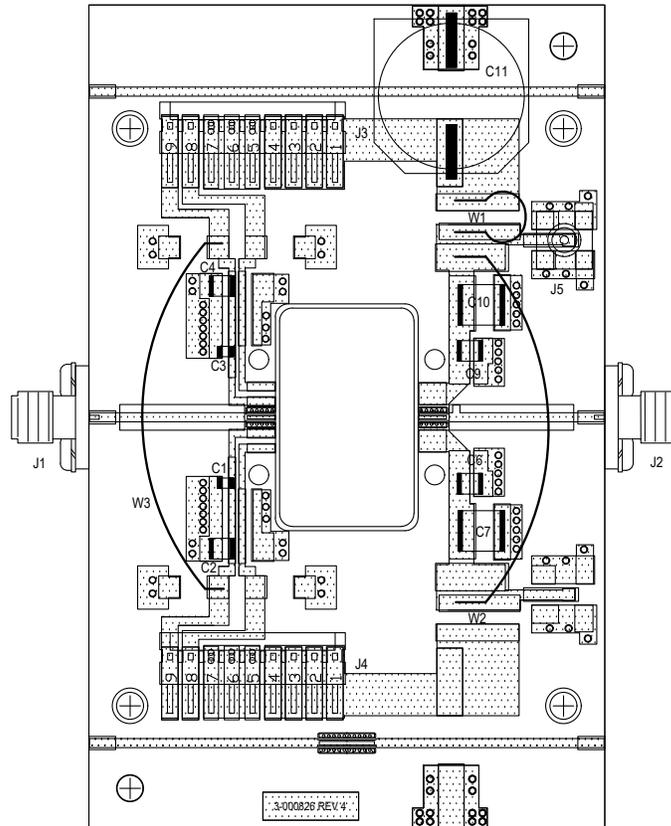

CMPA1C1D080F-AMP Evaluation Board Bill of Materials

Designator	Description	Qty
C1, C3	CAP, 33000 PF, 0805, 100 V, X7R	2
C2, C4, C6, C9	CAP, 2.2 UF, 100 V, 10%, X7R, 1210	4
C7, C10	CAP, 10 UF, 100 V, 10%, X7R, 2220	2
C11	CAP, 100 UF, 20%, 160 V, ELEC	1
W1	WIRE, 18 AWG ~ 3"	1
W2, W3	WIRE, 18 AWG ~ 1.75"	2
J1, J2	CONN, SMA, PANEL MOUNT JACK, FLANGE, 4-HOLE, BLUNT POST, 20 MIL	2
J3, J4	HEADER RT>PLZ .1CEN LK 9POS	2
J5	CONN, SMB, STRAIGHT JACK RECEPTACLE, SMT, 50 OHM, Au PLATED	1
	PCB, TEST FIXTURE, 440222 PKG	1
	BASEPLATE, CU, 2.5 X 4.0 X 0.5 IN	1
	2-56 SOC HD SCREW 1/4 SS	4
	#2 SPLIT LOCKWASHER SS	4
Q1	MMIC CMPA1C1D080F	1

Electrostatic Discharge (ESD) Classifications


Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	I B (≥ 500 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (≥ 200 V)	JEDEC JESD22 C101-C

Product Dimensions CMPA1C1D080F (Package 440222)

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.679	0.691	17.25	17.55
B	0.003	0.006	0.076	0.152
C	0.214	0.241	5.44	6.12
D	0.307	0.323	7.80	8.20
E	0.016	0.032	0.406	0.813
F	0.047	0.063	1.194	1.600
G	0.936	0.954	23.77	24.23
H	0.912	0.930	23.16	23.62
J	0.795	0.811	20.19	20.60
K	∅0.094	∅0.110	∅2.39	∅2.79
L	0.062	0.078	1.575	1.981
M	0.006	0.022	0.152	0.559
N	0.004	0.018	0.102	0.457

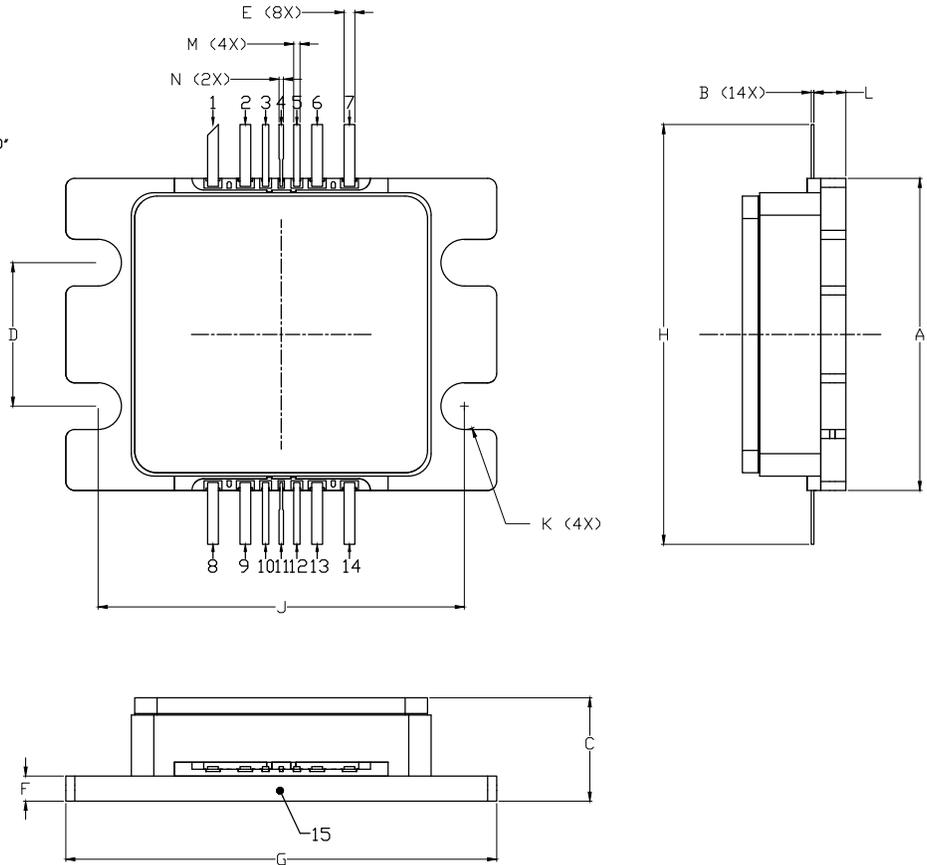

Pin	Desc.
1	Bias Gate 2
2	Bias Gate 2
3	GND
4	RF_IN
5	GND
6	Bias Gate 1
7	Bias Gate 1
8	Bias Drain 2
9	Bias Drain 2
10	GND
11	RF_OUT
12	GND
13	Bias Drain 1
14	Bias Drain 1

Part Number System

CMPA1C1D080F

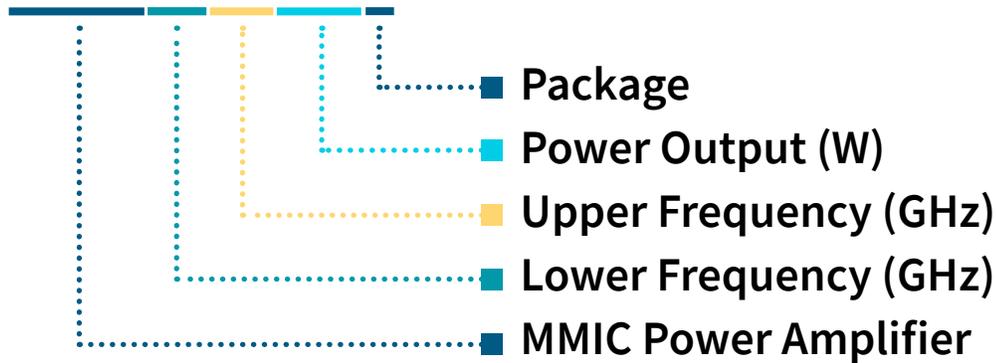


Table 1.


Parameter	Value	Units
Lower Frequency	12.75	GHz
Upper Frequency	13.25	GHz
Power Output	80	W
Package	Flange	-

Note:
Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1 A = 10.0 GHz 2 H = 27.0 GHz

Product Ordering Information

Order Number	Description	Unit of Measure	Image
CMPA1C1D080F	GaN HEMT	Each	
CMPA1C1D080F-AMP	Test Board with GaN MMIC Installed	Each	

Notes & Disclaimer

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.