

30 dB WR-62 Directional Waveguide Broadwall Coupler With UG-419/U Square Cover Flange and E-Plane Coupled Port from 12.4 GHz to 18 GHz

The FMWCP1013 is a WR-62 Directional Broadwall waveguide coupler that operates in the frequency range of 12.4 to 18 GHz. This Waveguide component has a typical VSWR of 1.05: 1. These designs are made of painted copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, or 30 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Fairview Microwave offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.



Electrical Specifications*

Description	Min	Typ	Max	Units
Frequency Range	12.4		18	GHz
Directivity		40		dB
Insertion Loss		0.15		dB
Main Line VSWR		1.05:1		
Nominal Coupling Level		30		dB

* Values at 25°C, sea level

Mechanical Specifications

Size

Length	13.75 in [349.25 mm]
Height	2.836 in [72.03 mm]
Weight	0.915 lbs [415.04 g]

Configuration

Design	Directional E-Plane Broadwall
Size	WR-62

Input Flange

Flange Type	Square Cover
Flange Designation	UG-419/U
Material	Copper Alloy
Plating	Silver

Output Flange

Flange Type	Square Cover
Flange Designation	UG-419/U
Material	Copper Alloy
Plating	Silver

Coupled Flange(s)

Flange Type	Square Cover
Flange Designation	UG-419/U
Material	Copper Alloy
Plating	Silver

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant	Yes
REACH Compliant	12/17/2015

Features:

- Broadwall Waveguide Coupler
- 30 dB Nominal Coupling Level
- 12.4 GHz to 18 GHz Frequency Range
- Body and Flanges made of Copper Alloy
- Low VSWR

Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling


Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


Plotted and Other Data


Notes:

- Values at 25 °C, sea level

Typical Performance Data

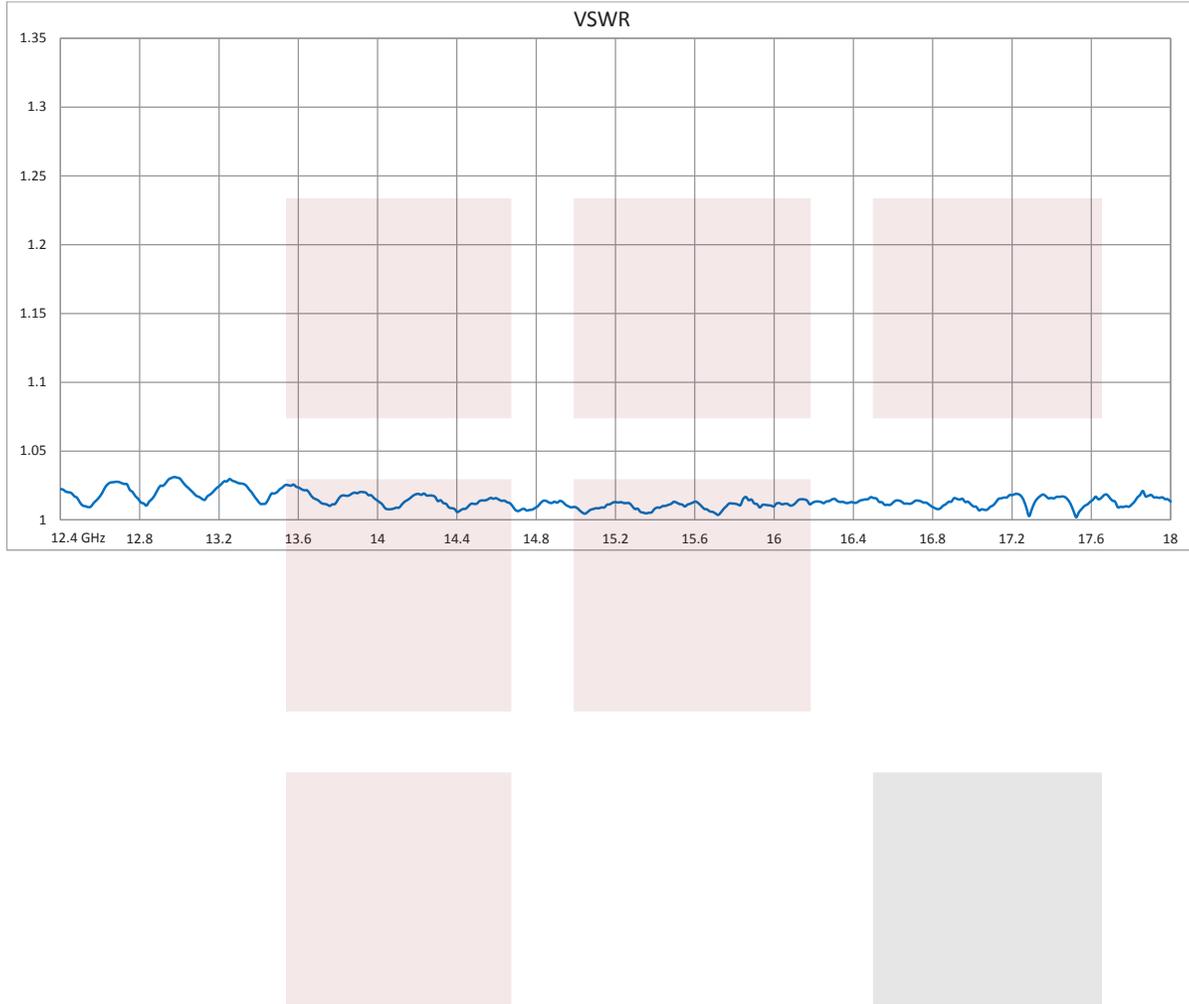

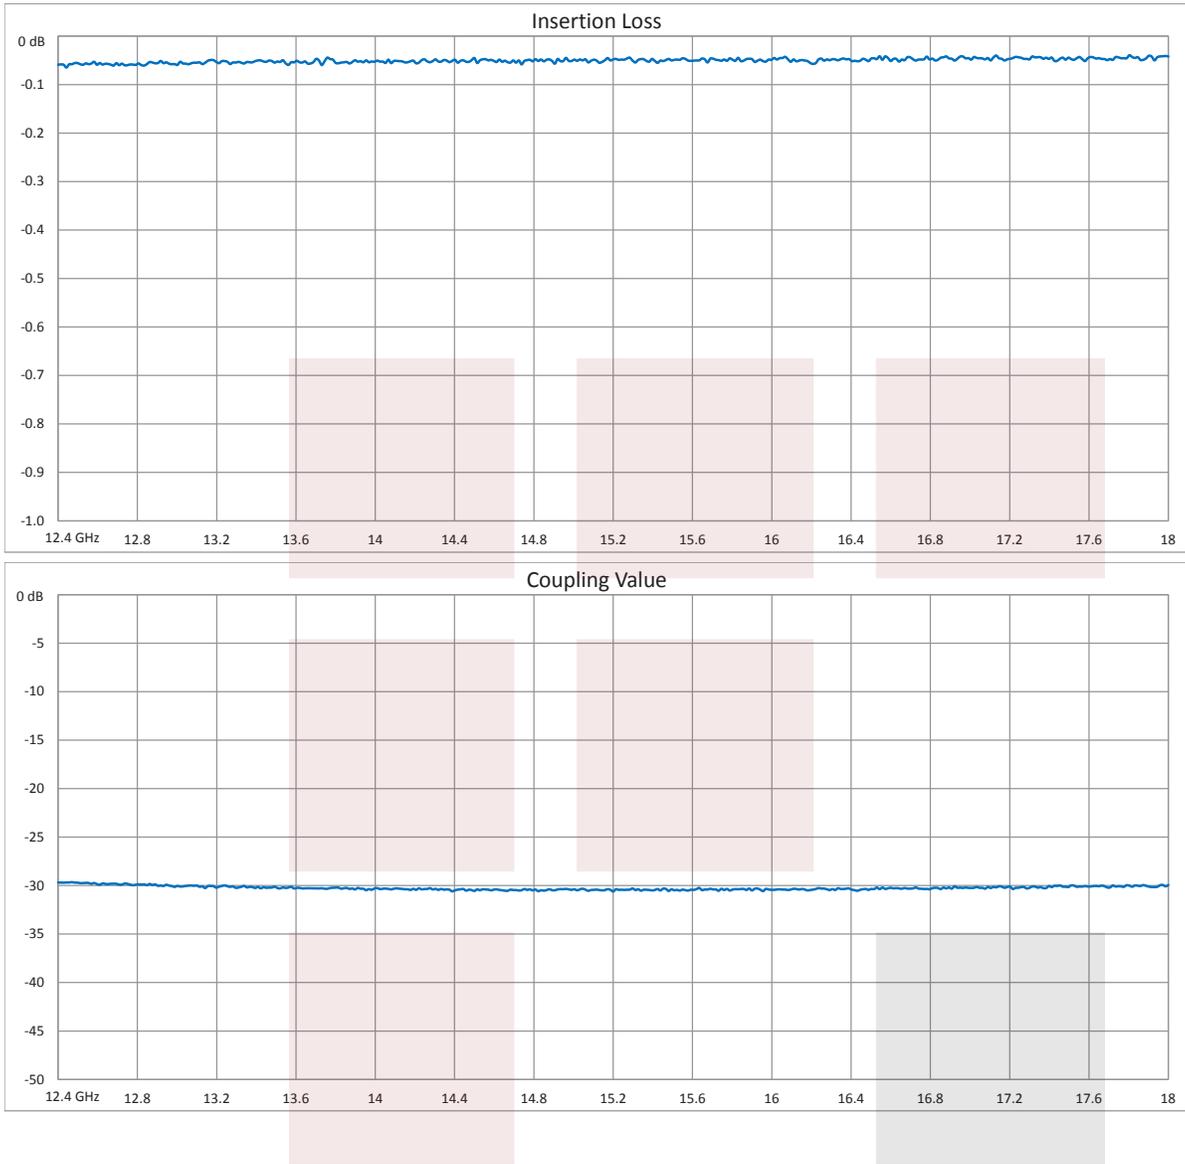

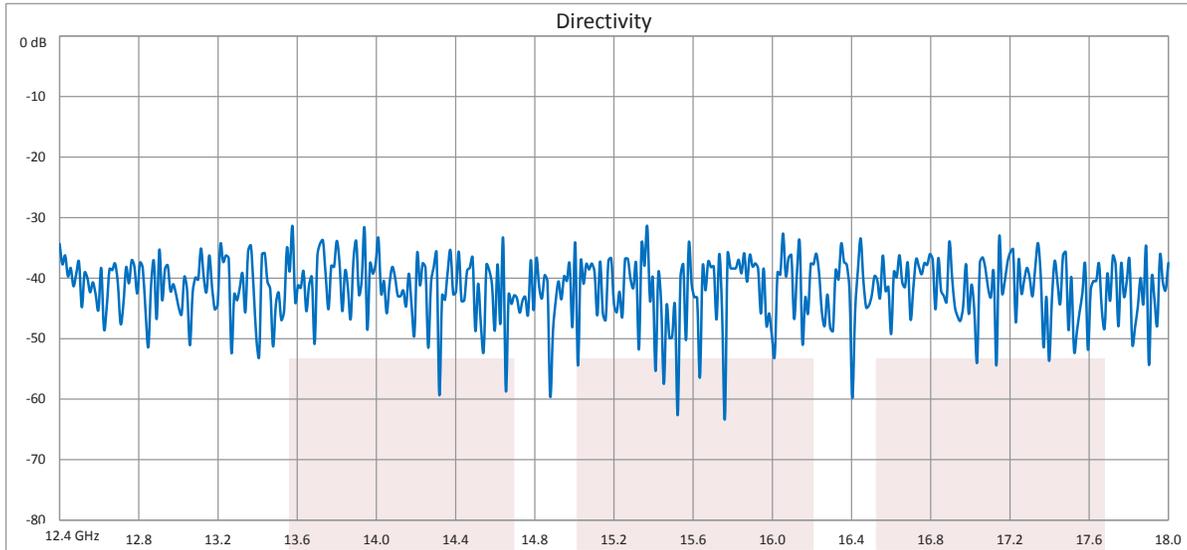


30 dB WR-62 Directional Waveguide Broadwall Coupler With UG-419/U Square Cover Flange and E-Plane Coupled Port from 12.4 GHz to 18 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [30 dB WR-62 Directional Waveguide Broadwall Coupler With UG-419/U Square Cover Flange and E-Plane Coupled Port from 12.4 GHz to 18 GHz FMWCP1013](https://www.fairviewmicrowave.com/30-db-wr-62-directional-waveguide-broadwall-coupler-ug419-square-e-fmw-cp1013-p.aspx)

URL: <https://www.fairviewmicrowave.com/30-db-wr-62-directional-waveguide-broadwall-coupler-ug419-square-e-fmw-cp1013-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

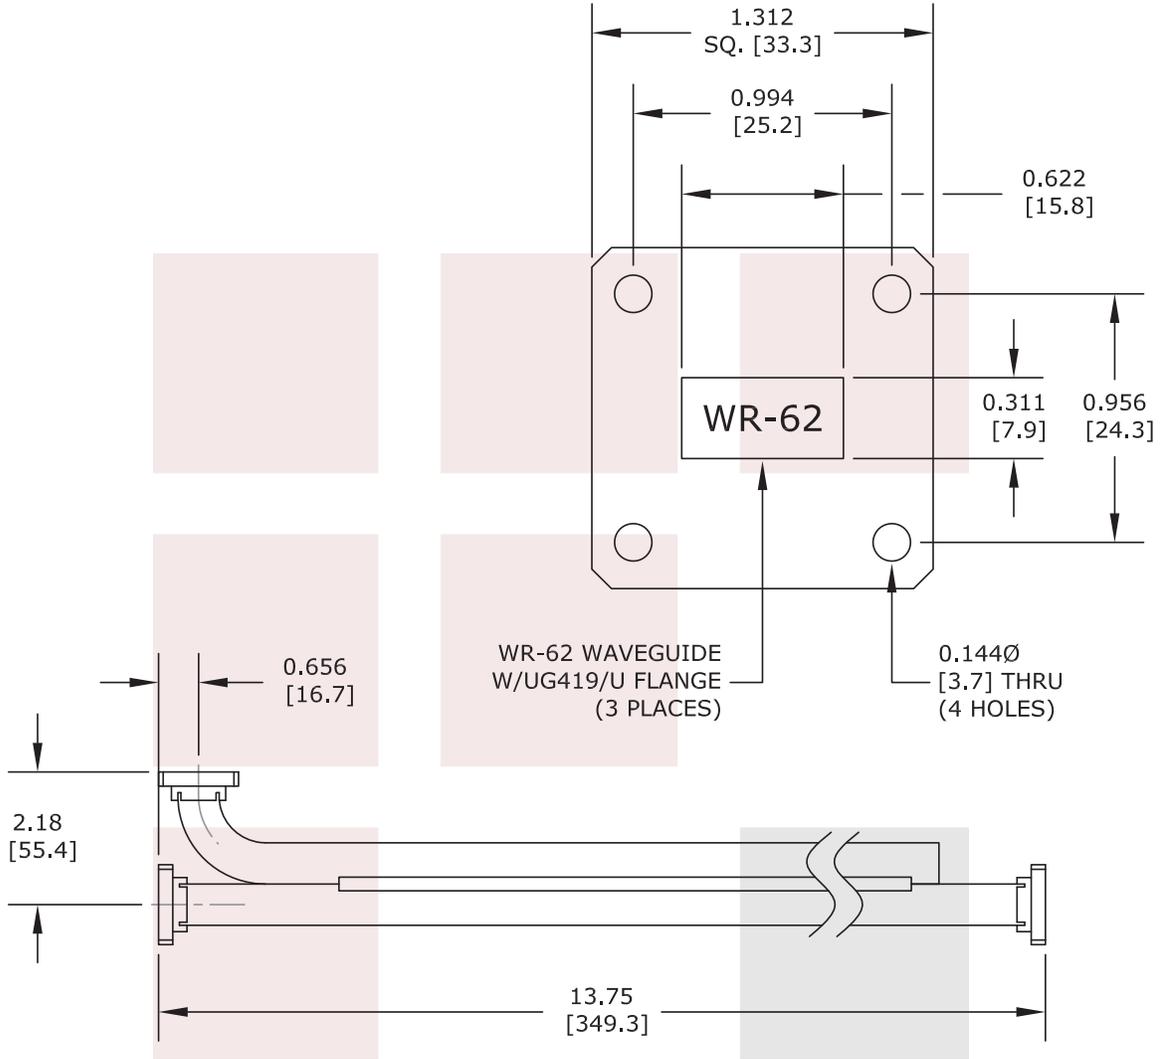

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES.
 DECIMALS ANGLES
 .X ±.030 ±1/2 DEG.
 .XX ±.015 FRACTIONS
 .XXX ±.005 ±1/32

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 30 dB WR-62 Directional Waveguide Broadwall Coupler With UG-419/U Square Cover Flange and E-Plane Coupled Port from 12.4 GHz to 18 GHz		DWG NO FMWCP1013		CAGE CODE 3FKR5	
CAD FILE	051016	SHEET	SCALE	N/A	SIZE A 2233