

Part No. M830120

GNSS or GPS L1/L2/L5/L6 Ceramic Antenna

1.575 / 1.561 / 1.606 GHz or 1575.42 / 1227.6 / 1176.45 / 1278.75 MHz

Supports: GNSS systems, Global antenna embedded systems, Satellite positioning systems



*GPS L1/L2/L5/L6 layout offered in Appendix 1

GPS / GLONASS / Beidou / Galileo or GPS L1,L2,L5,L6 Ceramic Antenna

1.575 GHz, 1.561 GHz, 1.606 GHz;
1575.42 MHz, 1227.6 MHz, 1176.45
1278.75 MHz

KEY BENEFITS

Stay-in-Tune

IMD antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Environmental Compliance

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- POS, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics Tracking
- Healthcare (FDA Class I)
- M2M, Industrial devices
- Smart Grid
- OBD-II

KYOCERA AVX series of ceramic Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for GPS enabled handheld devices.

Real-World Performance and Implementation

Ceramic antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PiFA or monopole designs that interact with their surroundings, complicating layout or changing performance with use position. KYOCERA AVX's antennas utilize patented IMD technology to deliver a unique size and performance combination.

Electrical Specifications

Typical performance on 40 x 80 mm PCB

Frequency (MHz)	1559 – 1563	1575	1559 – 1591	1593 – 1610	1575.42, 1227.6, 1176.45, 1278.75	
GNSS Bands	Beidou	GPS	Galileo	Glomass	GPS L1/L2/L5/L6	
Peak Gain (dBi)	2.23	2.33	2.81	2.93	Refer to Appendix 1	
Efficiency (%)	68	70	71	69		
Frequency f _o (GHz)	1.561	1.575	1.575	1.603		
VSWR	2.0:1 max					
Impedance	50 Ω unbalanced					
Additional Resource	Download Application Note and Simulation Files					

Mechanical Specifications & Ordering Part Number


Ordering Part Number	M830120
Size (mm)	8.00 x 3.00 x 1.33
Mounting	Surface mount
Weight (grams)	0.2
Packaging	Tape & Reel, M830120 – 1,000 pieces per reel
Demo Board	M830120-01: GPS, GLONASS, Galileo, Beidou M830120-02: L1, L2, L5, L6 – Appendix 1
Additional Resources	Download DXF, Gerber and 3D FIT Files

KYOCERA AVX GNSS Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
M830120	8.00 ± 0.2	3.00 ± 0.2	1.33 ± 0.1

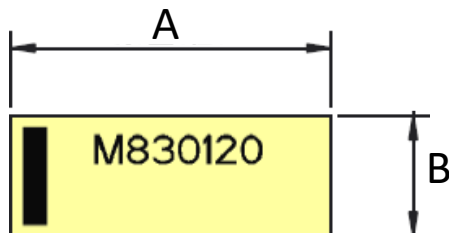


Top View



Height

Pin	Description
1	Ground
2	Dummy Pad
3	Matching circuit connection
4	Dummy Pad
5	Dummy Pad
6	Feed



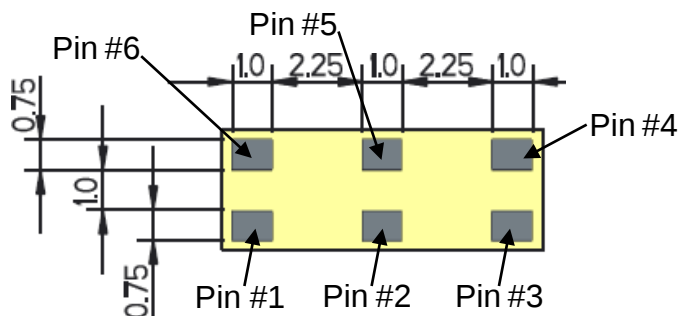


Bottom View

KYOCERA AVX GNSS Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR, Efficiency and Peak Gain Plots





Typical performance on 40 x 80 mm PCB

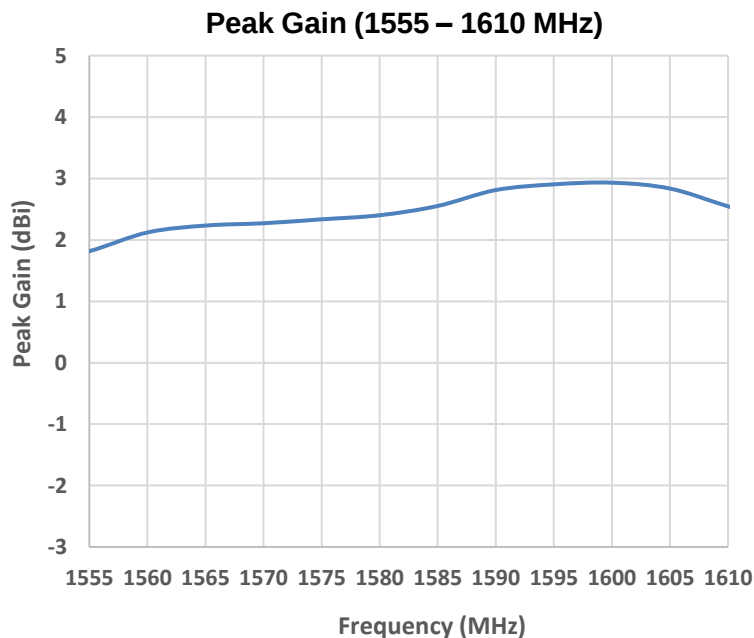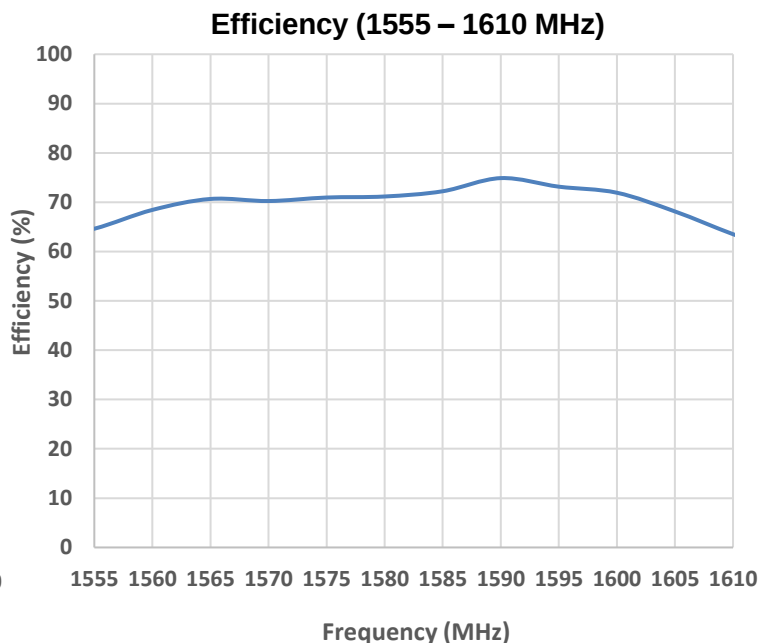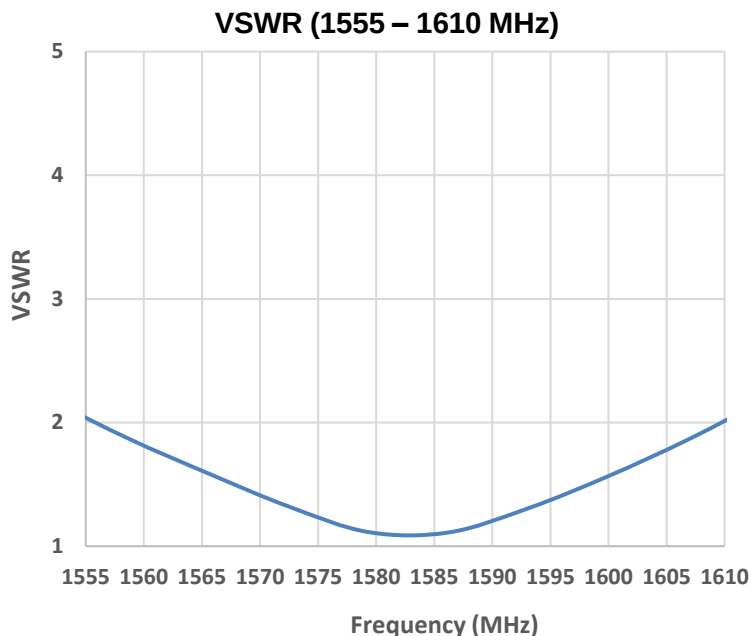

KYOCERA AVX GNSS Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns



Typical performance on 40 x 80 mm PCB
Measured @ 1560, 1575, 1605 MHz

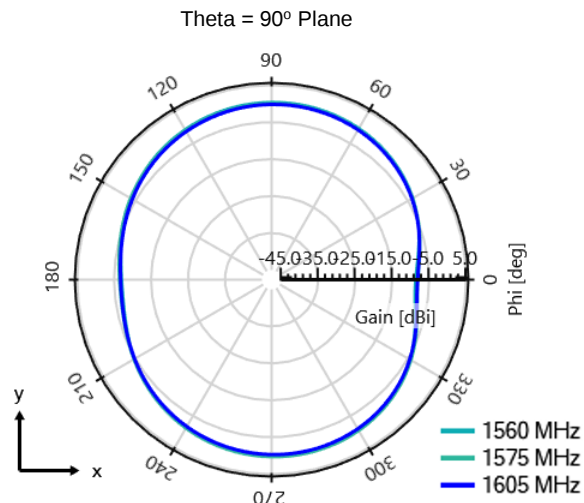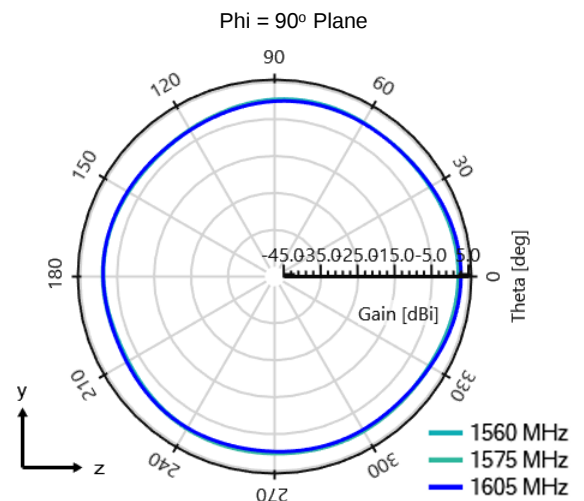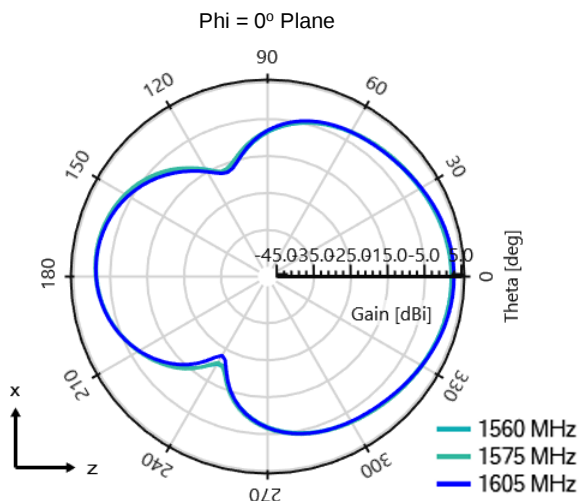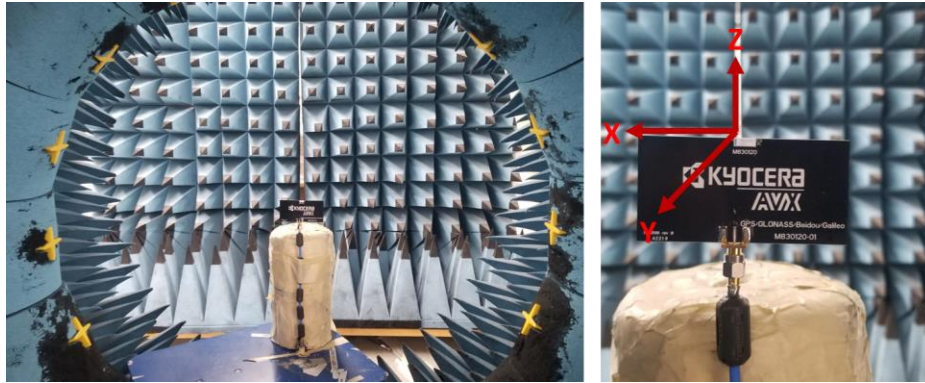

KYOCERA AVX Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout


Typical layout dimensions (mm)

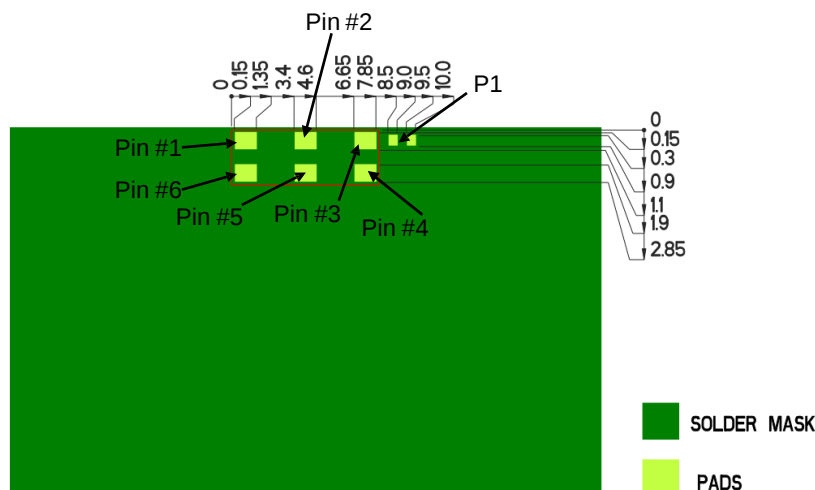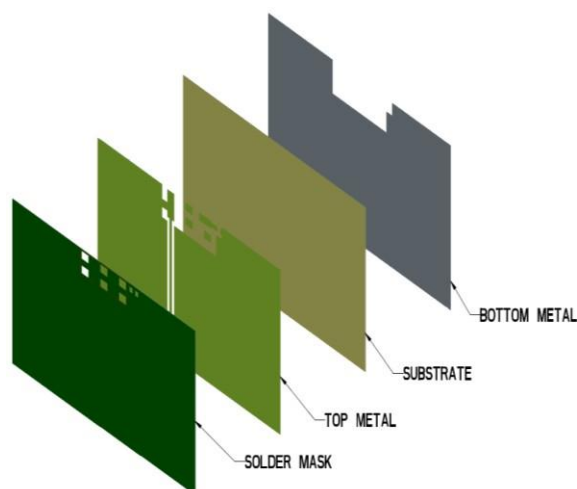

- Additional VIAS : Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions



Pin#	Description
1	Ground
2	Dummy Pad
3	Matching circuit connection
4	Dummy Pad
5	Dummy Pad
6	Feed

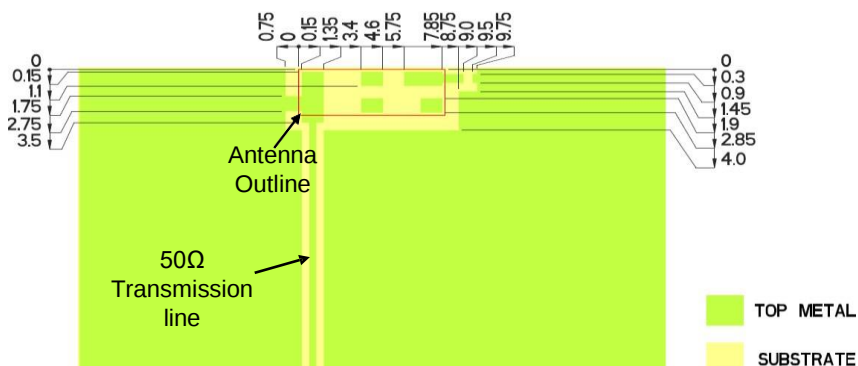

Matching Pi Network

Component	Value	KYOCERA AVX Part Number
P1	24 pF	0402YK240FBSTR

*Actual matching values depend on customer design

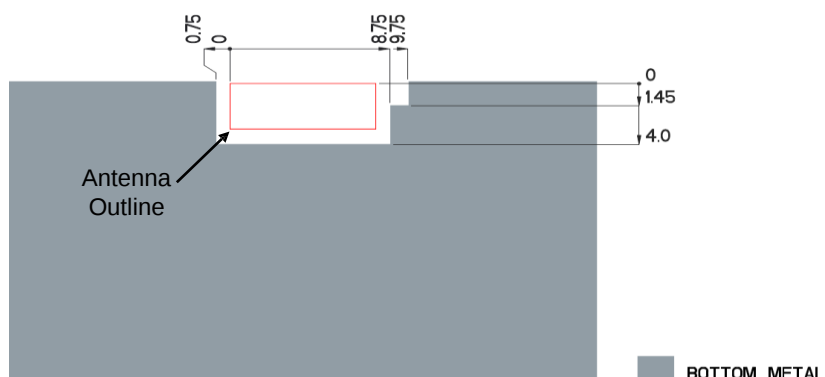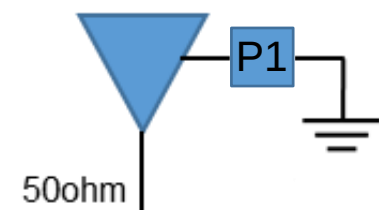


GNSS KYOCERA AVX Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board (M830120-01)

Typical layout dimensions (mm)

Part Number	Description	A (mm)	B (mm)	C (mm)
M830120-01	GPS, GLONASS, Galileo, Beidou	80.0	40.0	37.0

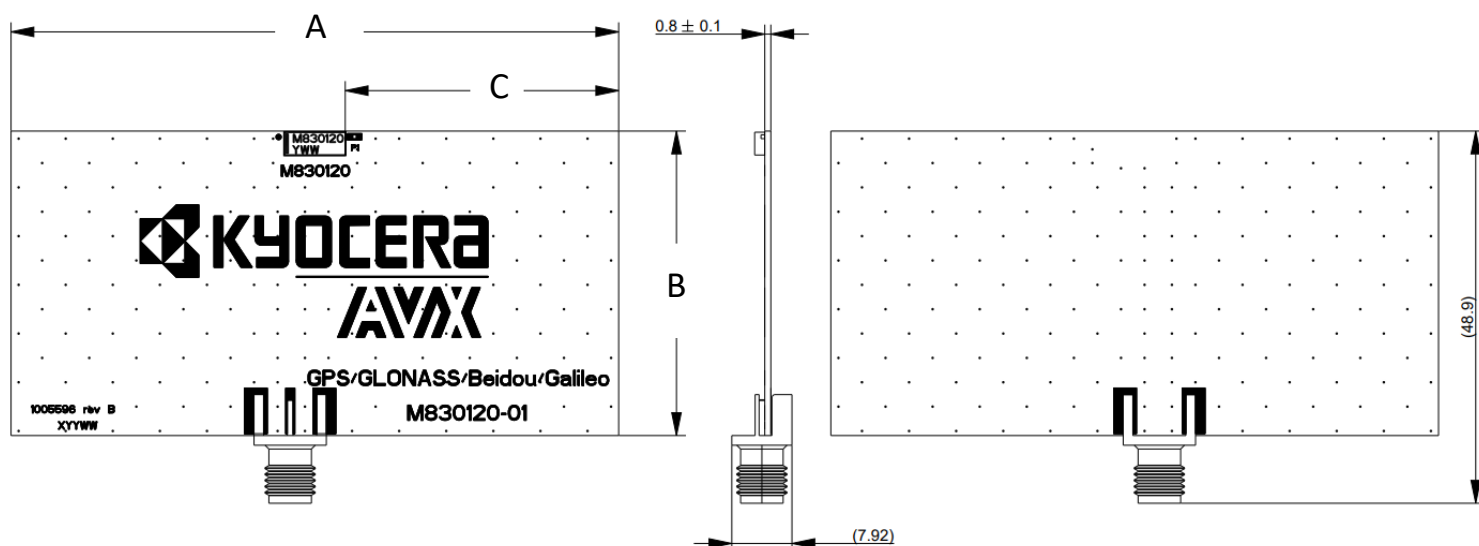

Appendix 1 GPS L1/L2/L5/L6 Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Appendix 1

(M830120-02)

Appendix 1 gives instructions on how to achieve GPS L1/L2/L5/L6 performances through layout and impedance matching network.
(1575.42/1227.6/1176.45/1278.75 MHz)


Frequency (MHz)	1575.42	1227.6	1176.45	1278.75
GPS Band	L1	L2	L5	L6
Peak Gain	2.7 dBi	2.8 dBi	2.7 dBi	3.0 dBi
Average Efficiency (%)	80	76	77	80
VSWR Match	2.0:1 max	2.5:1 max	2.5:1 max	2.5:1 max
Polarization	Linear			
Power Handling	0.5 Watt CW			
Feed Point Impedance	50 Ω unbalanced			

*Data shown above has Appendix 1 matching applied on 90 x 40 mm PCB.

Appendix 1 GPS L1/L2/L5/L6 Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout


Typical layout dimensions (mm)

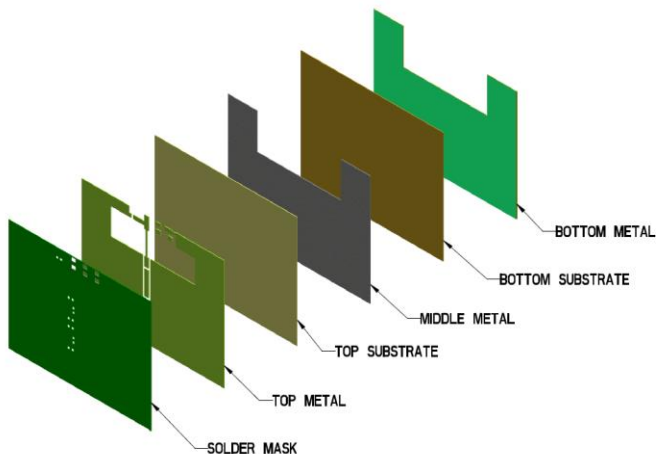

- Additional VIAS : Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions





Pin#	Description
1	Ground
2	Dummy Pad
3	Matching circuit connection
4	Dummy Pad
5	Dummy Pad
6	Feed

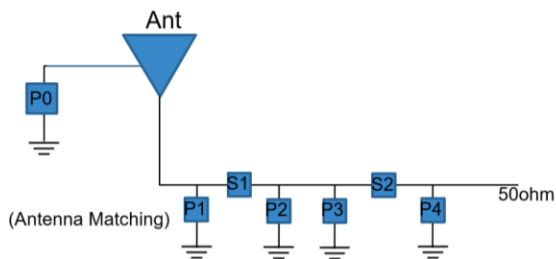

Matching Pi Network

	P0	P1	S1	P2	P3	S2	P4
Value	0.5 pF	DNI	2 pF	8.2 nH	DNI	0 Ω	DNI
Tolerance	$\pm 0.05\text{pF}$		$\pm 0.05\text{pF}$	$\pm 0.1\text{nH}$		jumper	
KYOCERA AVX PN	04023J0R5ABSTR		04023J2R0ABSTR	HL028R2BTTR			


*Actual matching values depend on customer design

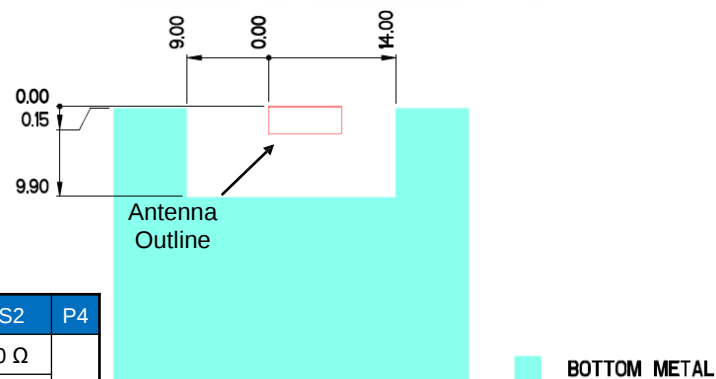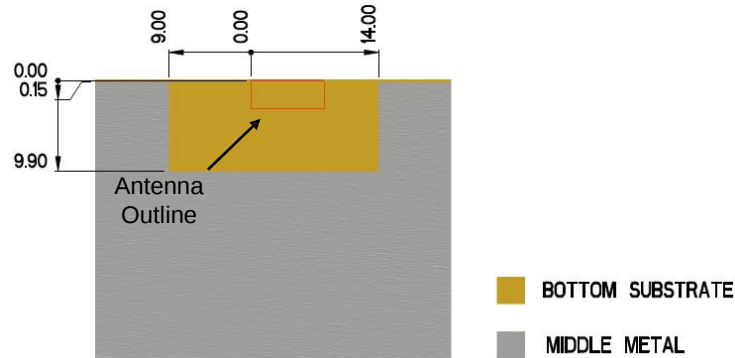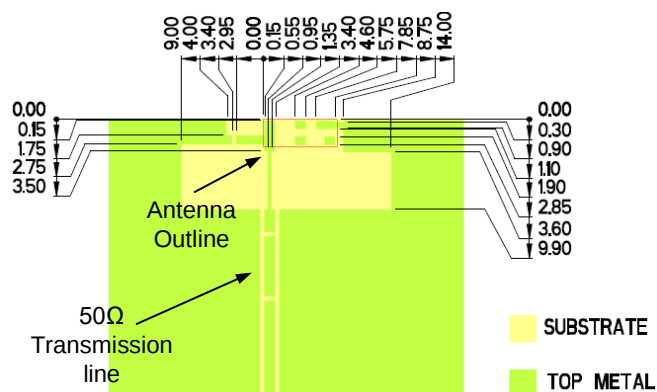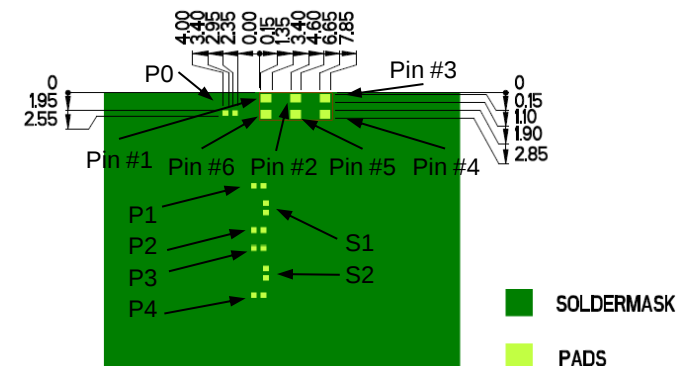

Appendix 1 GPS L1/L2/L5/L6 Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR, Efficiency and Peak Gain Plots

Typical performance on 40 x 90 mm PCB



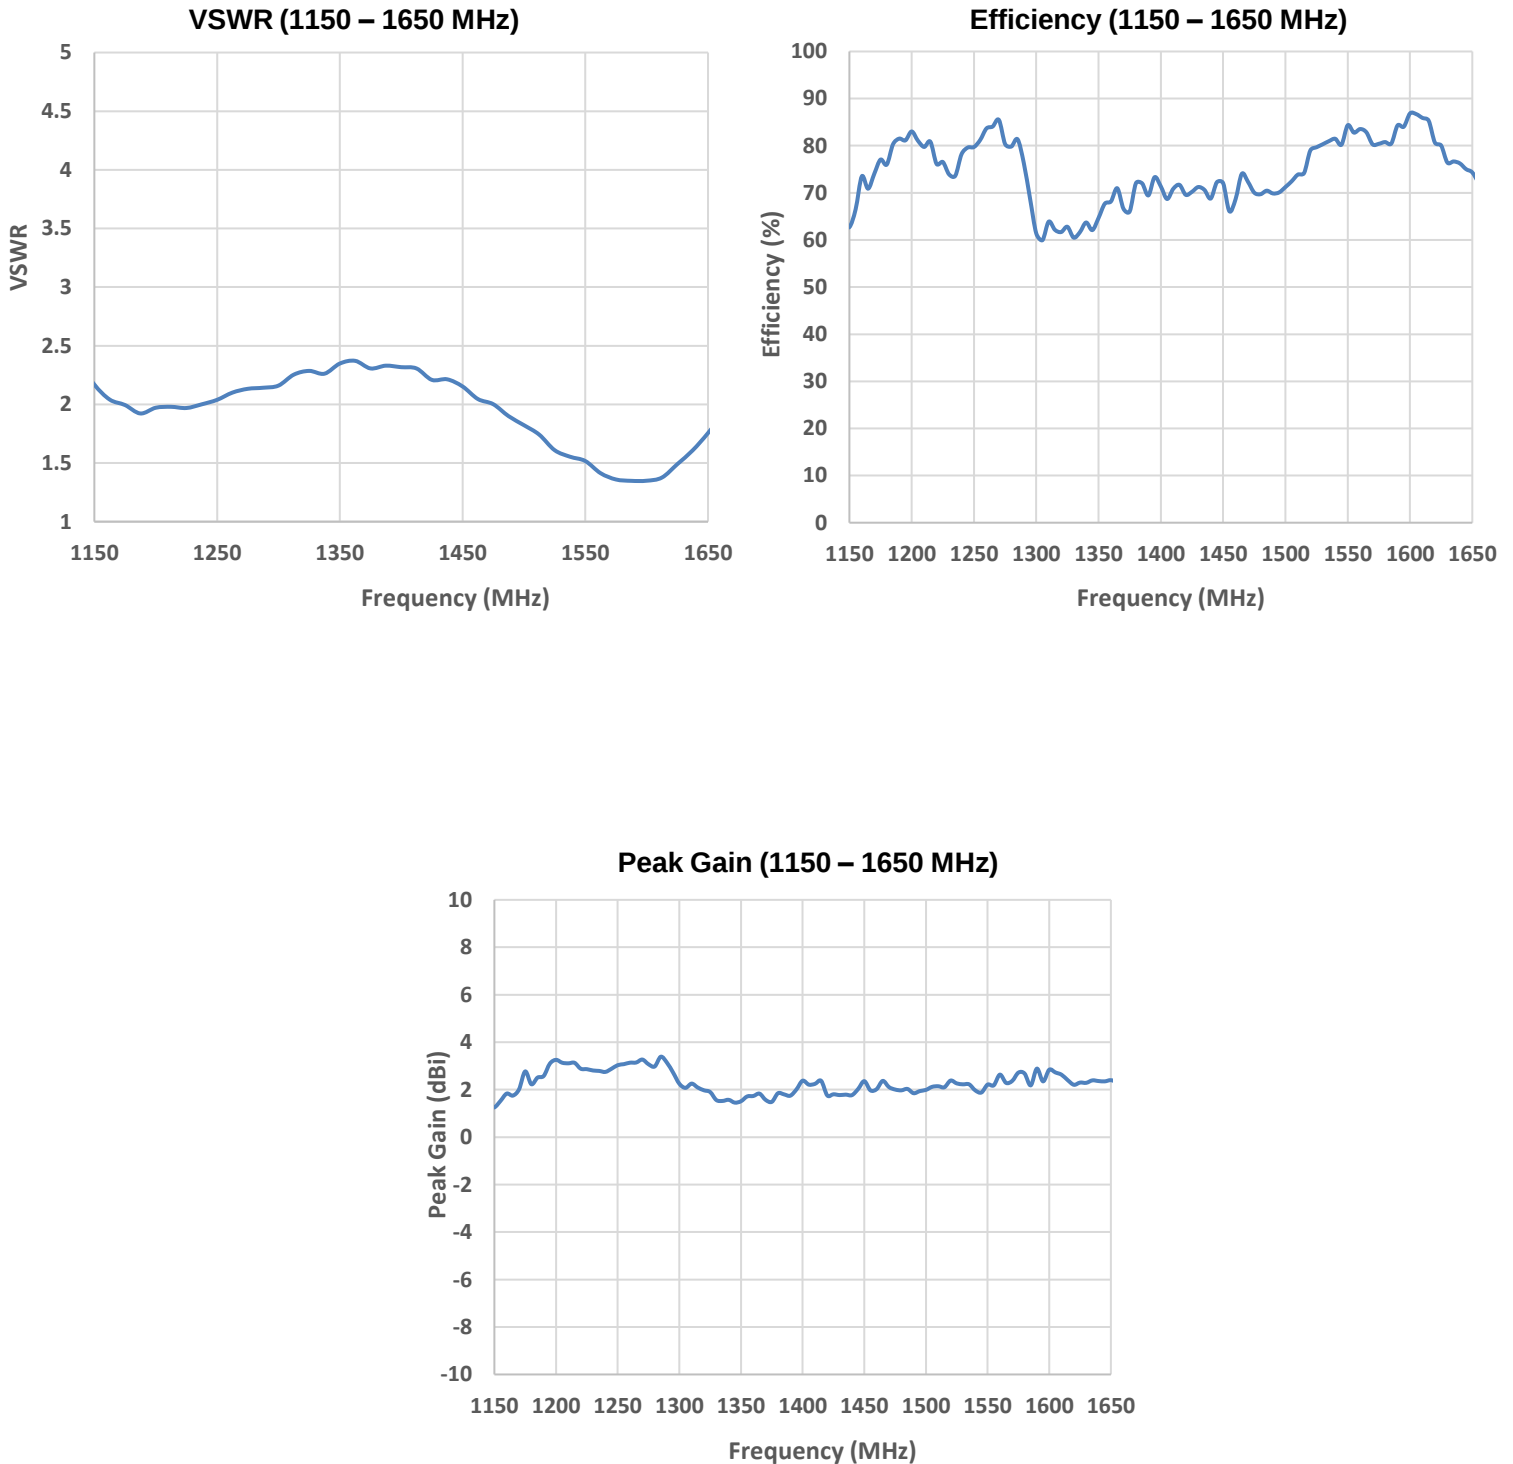


Appendix 1 GPS L1/L2/L5/L6 Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns

Typical performance on 40 x 90 mm PCB


Measured @ 1575, 1275, 1225, 1175, MHz

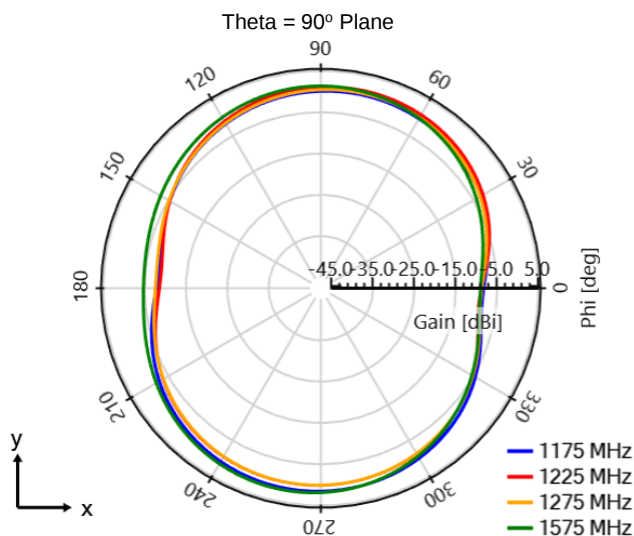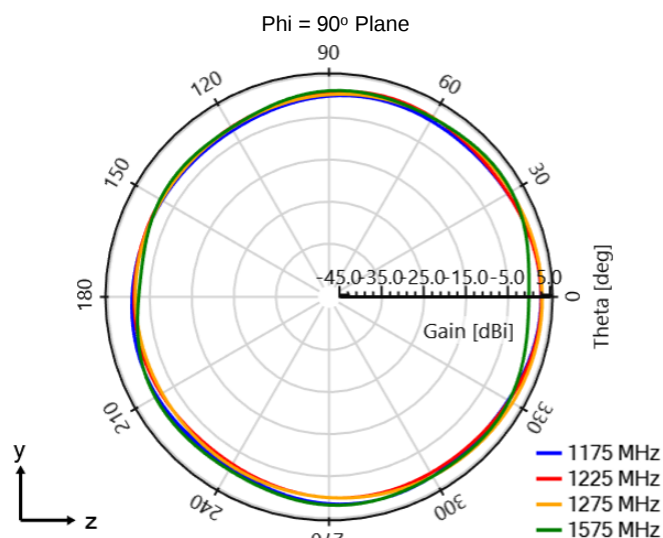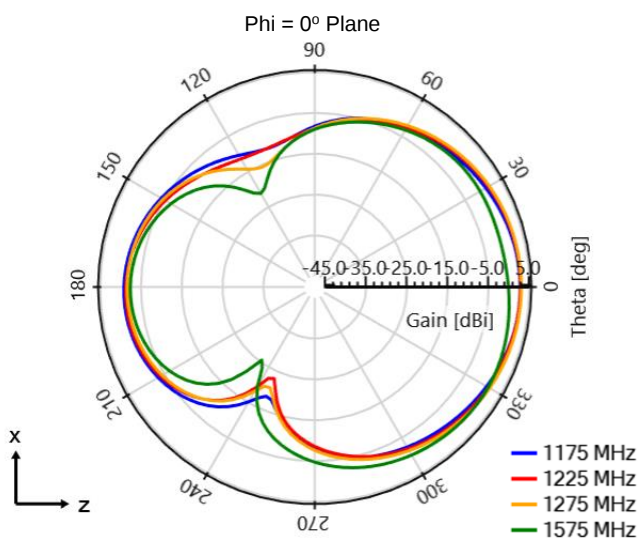

GNSS KYOCERA AVX Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board (M830120-02)
Typical layout dimensions (mm)

Part Number	Description	A (mm)	B (mm)	C (mm)
M830120-02	L1, L2, L5, L6	90.0	40.0	46.3

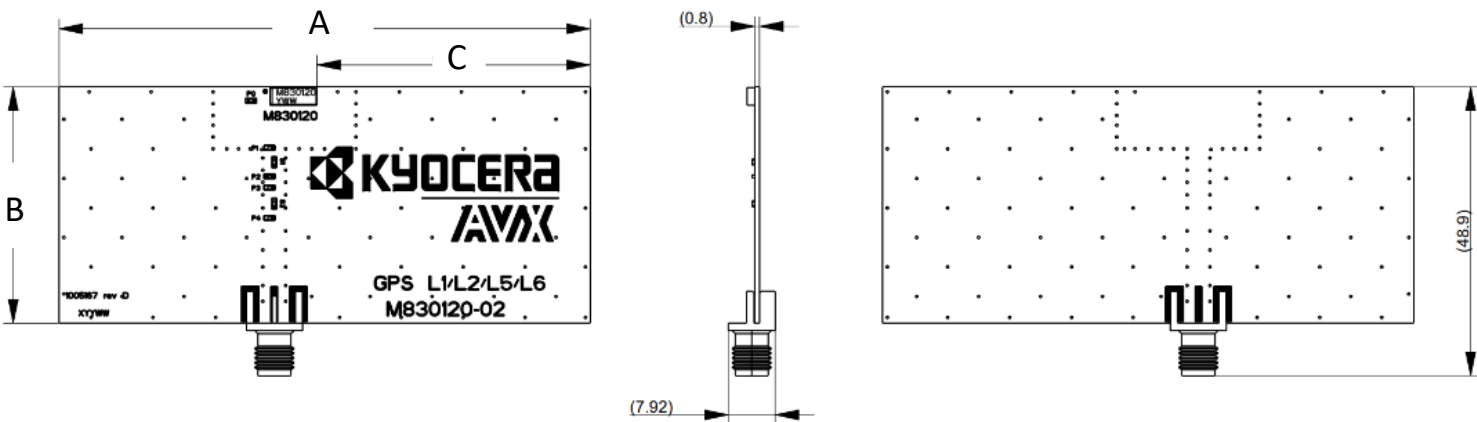

KYOCERA AVX GNSS Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Additional Resources – M830120 GPS L1 / L2 / L5 / L6 Ceramic Antenna

Simulation Files:

HFSS (23 R1): https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/M830120_07212024_23r1.zip

HFSS (19R3-22R2): https://www.kyocera-avx.com/download/antennas/ansys-hfss/19r3/M830120_07212024_19r3.zip

CST: https://www.kyocera-avx.com/download/antennas/CST/M830120-01&M830120-02_CST.zip

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-M-Series.pdf

DXF File:

https://www.kyocera-avx.com/download/antennas/3D-DXF/M830120-02_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/M830120-02_GERBERS.zip

Additional Resources – M830120 GPS / GLONASS / Beidou / Galileo Ceramic Antenna

Simulation Files:

HFSS (23 R1): https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/M830120_07212024_23r1.zip

HFSS (19R3-22R2): https://www.kyocera-avx.com/download/antennas/ansys-hfss/19r3/M830120_07212024_19r3.zip

CST: https://www.kyocera-avx.com/download/antennas/CST/M830120-01&M830120-02_CST.zip

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-M-Series.pdf

DXF File:

https://www.kyocera-avx.com/download/antennas/3D-DXF/M830120_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/M830120_GERBERS.zip

3D FIT File:

https://www.kyocera-avx.com/download/antennas/ME-FIT/M830120_ME_fit.zip