



1 Watt WR-34 Waveguide Load 19.6 GHz to 21.2 GHz, Brass with UG Square Cover Flange

Waveguide Terminations Technical Data Sheet

PE-W34TR1001

Features

- WR-34 Waveguide
- Operating Frequency Range from 19.6 GHz to 21.2 GHz
- UG Square Cover Flange
- 1.15:1 Max VSWR
- 1 Watts Average Power Handling

Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PE-W34TR1001 is a WR-34 waveguide termination/load that operates in the frequency range of 19.6 GHz to 21.2 GHz. This WR-34 waveguide termination has a Max VSWR of 1.15:1. This waveguide termination design is made of painted brass and incorporates a standard UG Square Cover flange. Waveguide terminations are part of Pasternack's comprehensive waveguide product offerings which are available in stock and ready for same-day shipment.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	19.6		21.2	GHz
VSWR			1.15:1	
Input Power (CW)			1	Watt

Mechanical Specifications

Size	
Length	0.71 in [18.03 mm]
Width/Dia.	0.88 in [22.35 mm]
Height	0.88 in [22.35 mm]

Description	Flange	Waveguide
Designation	UG-597/U	WR-34
Type	Square Cover	
Material	Brass	Brass
Plating		Passivated
Finish		Grey paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt WR-34 Waveguide Load 19.6 GHz to 21.2 GHz, Brass with UG Square Cover Flange PE-W34TR1001](#)



1 Watt WR-34 Waveguide Load 19.6 GHz to
21.2 GHz, Brass with UG Square Cover Flange

Waveguide Terminations Technical Data Sheet

PE-W34TR1001

Environmental Specifications

Temperature

Operating Range

-40 to +70 deg C

Compliance Certifications (see [product page](#) for current document)

Notes:

1 Watt WR-34 Waveguide Load 19.6 GHz to 21.2 GHz, Brass with UG Square Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt WR-34 Waveguide Load 19.6 GHz to 21.2 GHz, Brass with UG Square Cover Flange PE-W34TR1001](#)




URL: <https://www.pasternack.com/1-watts-wr-34-rf-load-19.6-21.2-ghz-instrumentation-grade-pe-w34tr1001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W34TR1001 CAD Drawing

1 Watt WR-34 Waveguide Load 19.6 GHz to 21.2 GHz,
Brass with UG Square Cover Flange

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/22/2021	S.PONG

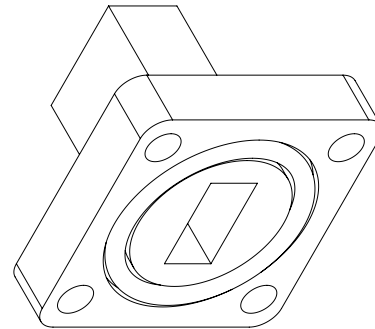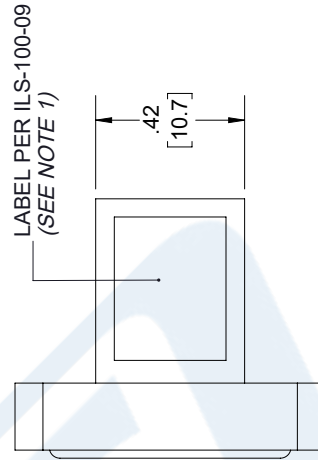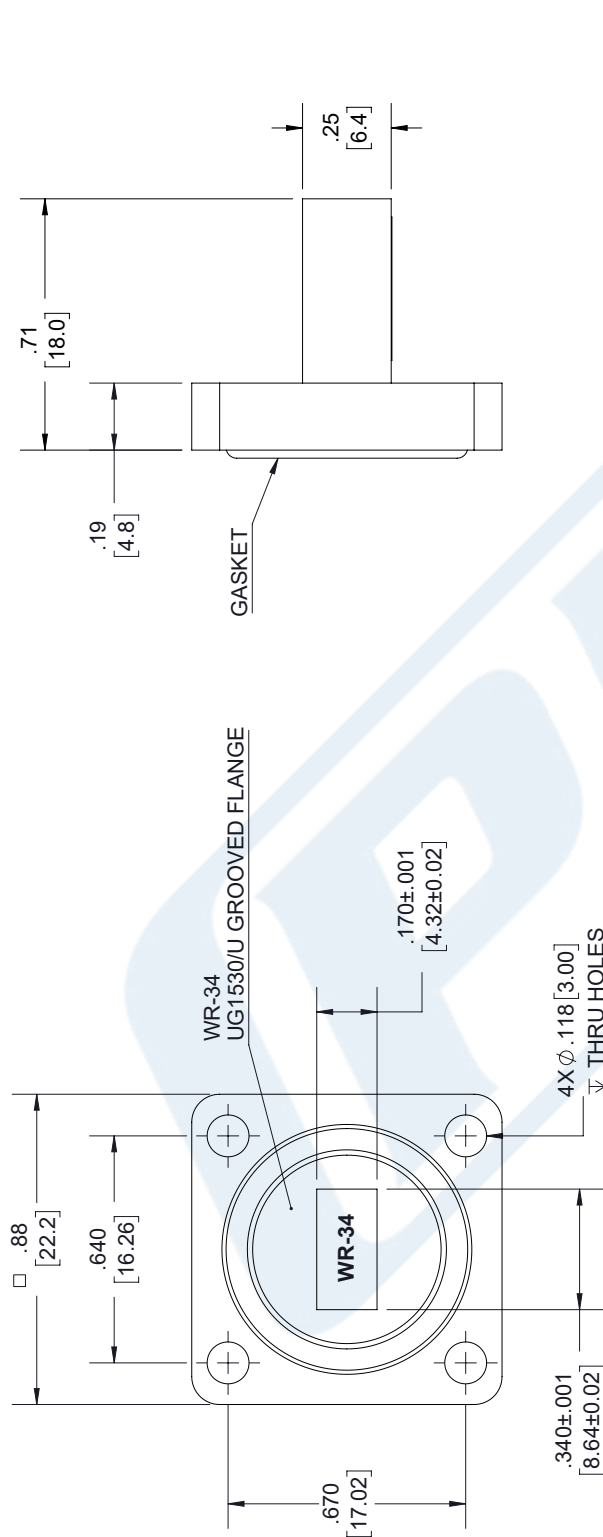

NOTES:

1. LABEL PER ILS-100-09. FOR INTERNAL USE ONLY.
LABEL LOCATION FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE PASTERNAK an INFINITI brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ± .005 [.13] CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5% / -0 ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	ITEM NO. A 53919 DRAWN BY K.DANG CAGE CODE PE-W34TR1001	REV A	