

# SMW15AC001-VM DATA SHEET

# WR-15 to 1.85mm Male Waveguide to Coax Adapter UG-385/U Round Cover Flange With 50 GHz to 65 GHz Frequency Range For V Band

The SMW15AC001-VM is a waveguide to coaxial adapter with a frequency range of 50 to 65 GHz, operating in the V Band. This adapter offers a precision tolerance UG-385/U flange and a WR-15 waveguide interface size. The SMW15AC001-VM is constructed of gold plated aluminum to ensure durability and repeatable RF performance.

# Configuration

Waveguide Size WR-15

Flange UG-385/U Round Cover

RF Connector 1.85mm Male Impedance 50 Ohms Body Geometry Right Angle

# **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	50		65	GHz
VSWR			1.44:1	
Insertion Loss			0.5	dB

## **Mechanical Specifications**

#### Size

 Length
 1.05 in [26.67 mm]

 Width
 0.75 in [19.05 mm]

 Height
 1.065 in [27.05 mm]

 Weight
 0.0038 lbs [1.72 g]

#### **RF Connector**

Connector Type 1.85mm Male Body Material and Plating Stainless Steel

#### **Waveguide Interface**

Waveguide Type

Flange Type

Flange Designation

Body Material and Plating

Plating Specification

WR-15

Round Cover

UG-385/U

Aluminum, Gold

ASTMB488

#### **Environmental Specifications**

**Temperature** 

Operating Range -40 to +85 deg C

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

Values at +25 °C, sea level unless stated otherwise



# Features:

- V Band, 50 to 65 GHz Frequency Range
- WR-15 Waveguide Interface with Precision Tolerance UG-385/U Flange
- 1.85 mm Male RF Interface
- Comprehensive waveguide offering also includes E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.


Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013


Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



# **Typical Performance Data**

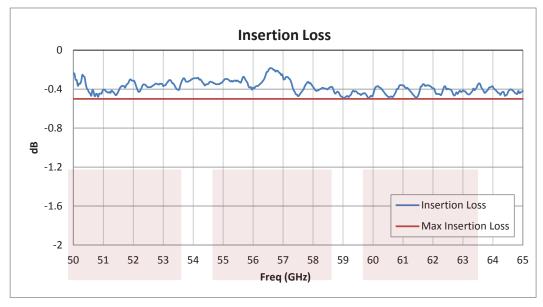

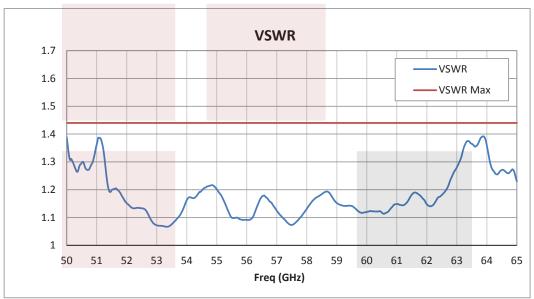






WR-15 to 1.85mm Male Waveguide to Coax Adapter UG-385/U Round Cover Flange With 50 GHz to 65 GHz Frequency Range For V Band from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: WR-15 to 1.85mm Male Waveguide to Coax Adapter UG-385/U Round Cover Flange With 50 GHz to 65 GHz Frequency Range For V Band SMW15AC001-VM


URL: https://www.fairviewmicrowave.com/wr-15-1.85mm-waveguide-coax-adapter-65-ghz-smw15ac001-vm-p.aspx








\* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

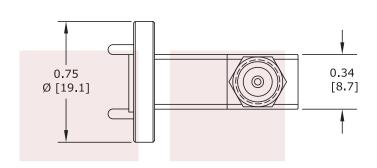

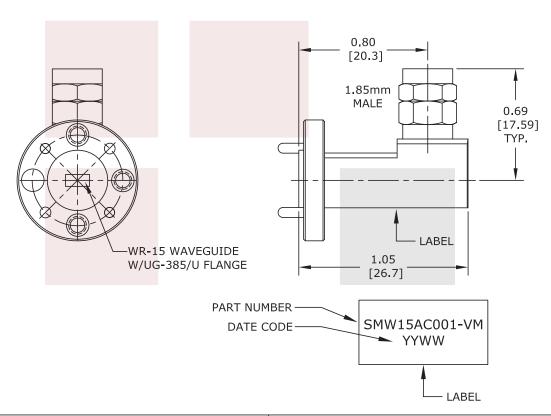

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].							
WR-15 to 1.85mm Male Waveguide to Coax Adapter UG-385/U Round Cover Flange With 50 GHz to 65 GHz Frequency Range For V Band	DWG NO SMW15AC001-VM			CAGE CODE 3FKR5				
	l	101915	SHEET	SCAL	E N/A	SIZE A	150	