



## BNC Female Connector Clamp Attachment for RG58

### RF Connectors Technical Data Sheet

**M39012/17-0101**

#### Configuration

- BNC Female Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: RG58

#### Features

- Max. Operating Frequency 4 GHz
- Excellent VSWR of 1.25:1
- Gold Plated Beryllium Copper Contact
- QPL Part

#### Applications

- General Purpose Test
- Custom Cable Assemblies

#### Description

Pasternack's M39012/17-0101 BNC male connector is part of our full line of RF components available for same-day shipping. Our BNC female connector operates up to a maximum frequency of 4 GHz and offers excellent VSWR of 1.25:1.

Our BNC female connector M39012/17-0101 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.25:1	
Impedance		50		Ohms
Dielectric Withstanding Voltage (AC)			1,500	Vrms

#### Mechanical Specifications

##### Size

Length	1.16 in [29.36 mm]
Width	0.56 in [14.27 mm]
Height	0.56 in [14.27 mm]
Weight	0.04 lbs [18.60 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Clamp Attachment for RG58 M39012/17-0101](#)



## BNC Female Connector Clamp Attachment for RG58

### RF Connectors Technical Data Sheet

**M39012/17-0101**

#### Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Brass	Silver
Body	Brass	Silver

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Clamp Attachment for RG58 M39012/17-0101](#)




## BNC Female Connector Clamp Attachment for RG58


### RF Connectors Technical Data Sheet

**M39012/17-0101**


#### Assembly Instruction

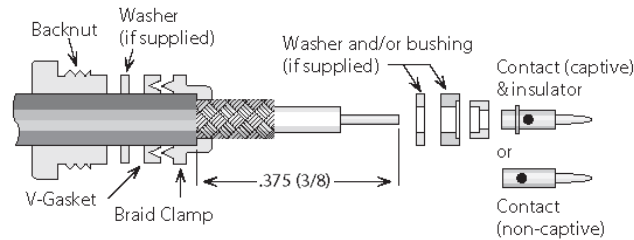


- 1) Trim cable jacket to dimension A. Slide backnut, washer, V-gasket, and braid clamp onto cable as shown. Cable jacket should bottom on step in braid clamp.

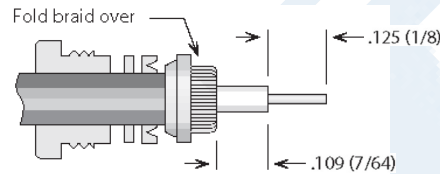

- 2) Comb braid wires out straight and fold back over front shoulder of braid clamp (braid wires should not overlap one another after folding). Trim braid wires flush with step of braid clamp. Trim cable dielectric and center conductor to dimensions B and C.

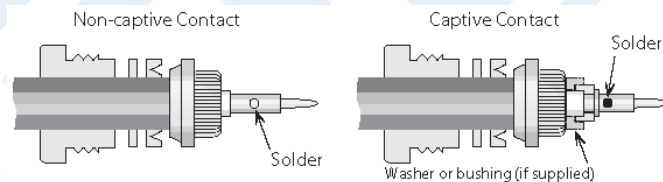

- 3) If support insulator is provided for RG-62 or 71 cable, insert into hollow in dielectric. Assemble rear bushing or washer (if supplied), rear insulator (if captive contact) and contact, and solder rear contact to center conductor. Rear of contact should be flush with cable dielectric end. For right angle connectors with access cap, omit this step entirely.

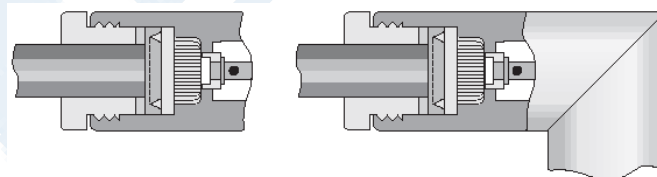

- 4) Insert prepared cable and hardware into body and tighten backnut. For right angle connectors with access cap, solder center conductor into slot in contact and tighten access cap.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Clamp Attachment for RG58 M39012/17-0101](#)



## BNC Female Connector Clamp Attachment for RG58

### RF Connectors Technical Data Sheet

**M39012/17-0101**

BNC Female Connector Clamp Attachment for RG58 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Clamp Attachment for RG58 M39012/17-0101](https://www.pasternack.com/bnc-female-rg58-connector-m39012-17-0101-p.aspx)

URL: <https://www.pasternack.com/bnc-female-rg58-connector-m39012-17-0101-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# M39012/17-0101 CAD Drawing

BNC Female Connector Clamp Attachment for RG58

