



## BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax

### RF Cable Assemblies Technical Data Sheet


PE38344-60

#### Configuration

- Connector 1: BNC Male
- Connector 2: BNC Female
- Cable Type: PE-C195

#### Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

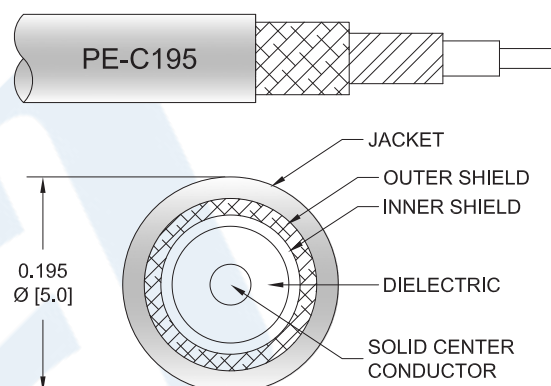

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE38344-60 BNC male to BNC female 60 inch cable using PE-C195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to female gender configuration with 50 ohm flexible PE-C195 coax. The PE38344-60 BNC male to BNC female cable assembly operates to 4 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax PE38344-60](#)



## BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax

### RF Cable Assemblies Technical Data Sheet

PE38344-60

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 4       | GHz          |
| VSWR                    |         |              | 1.4:1   |              |
| Velocity of Propagation |         | 80           |         | %            |
| RF Shielding            | 90      |              |         | dB           |
| Capacitance             |         | 25.4 [83.33] |         | pF/ft [pF/m] |
| Jacket Spark            |         |              | 5,000   | Vrms         |

#### Specifications by Frequency

| Description           | F1    | F2    | F3   | F4    | F5    | Units |
|-----------------------|-------|-------|------|-------|-------|-------|
| Frequency             | 0.15  | 0.45  | 1.5  | 2.5   | 4     | GHz   |
| Insertion Loss (Typ.) | 0.415 | 0.575 | 0.87 | 1.105 | 1.335 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

|          |                     |
|----------|---------------------|
| Length*  | 60 in [152.4 cm]    |
| Diameter | 0.571 in [14.5 mm]  |
| Weight   | 0.164 lbs [74.39 g] |

##### Cable

|                                      |                     |
|--------------------------------------|---------------------|
| Cable Type                           | PE-C195             |
| Impedance                            | 50 Ohms             |
| Inner Conductor Type                 | Solid               |
| Inner Conductor Material and Plating | Copper              |
| Dielectric Type                      | PE (F)              |
| Number of Shields                    | 2                   |
| Shield Layer 1                       | Aluminum Tape       |
| Shield Layer 2                       | Tinned Copper Braid |
| Jacket Material                      | PE, Black           |
| Jacket Diameter                      | 0.195 in [4.95 mm]  |

|                              |                  |
|------------------------------|------------------|
| One Time Minimum Bend Radius | 0.5 in [12.7 mm] |
| Repeated Minimum Bend Radius | 2 in [50.8 mm]   |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax PE38344-60](#)



BNC Male to BNC Female Cable 60 Inch  
Length Using PE-C195 Coax

RF Cable Assemblies Technical Data Sheet

PE38344-60

**Connectors**

| Description                   | Connector 1      | Connector 2   |
|-------------------------------|------------------|---------------|
| Type                          | BNC Male         | BNC Female    |
| Specification                 | MIL-STD-348A     | MIL-STD-348A  |
| Impedance                     | 50 Ohms          | 50 Ohms       |
| Contact Material and Plating  | Brass, Gold      | Brass, Gold   |
| Contact Plating Specification | 30μ in. minimum  |               |
| Dielectric Type               | Teflon           | Teflon        |
| Body Material and Plating     | Brass, Nickel    | Brass, Nickel |
| Body Plating Specification    | 100μ in. minimum |               |

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax PE38344-60](#)



## BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax

### RF Cable Assemblies Technical Data Sheet

PE38344-60

#### How to Order

Part Number Configuration:

PE38344

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE38344-12 = 12 inches long cable  
PE38344-100cm = 100 cm long cable

BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax PE38344-60](https://www.pasternack.com/bnc-male-bnc-female-pe-c195-cable-assembly-pe38344-60-p.aspx)


URL: <https://www.pasternack.com/bnc-male-bnc-female-pe-c195-cable-assembly-pe38344-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE38344-60 CAD Drawing

BNC Male to BNC Female Cable 60 Inch Length Using PE-C195 Coax

| REVISIONS |                      |          |          |
|-----------|----------------------|----------|----------|
| REV.      | DESCRIPTION          | DATE     | APPROVED |
| A         | PCR PE38344 20200821 | 09/15/20 | SRAUTUS  |

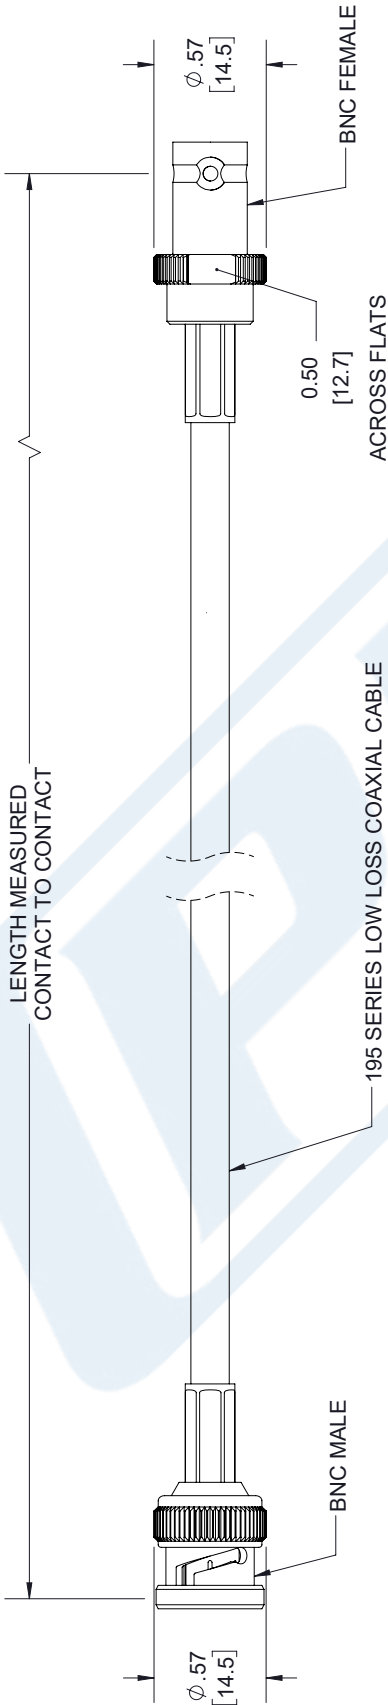

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

|               |       |             |
|---------------|-------|-------------|
| .X = ± .2     | [.08] | FRACTIONS   |
| .XX = ± .02   | [.51] | ± 1/32      |
| .XXX = ± .005 | [.13] | ANGLES ± 1° |

CABLE LENGTH (L) TOLERANCES:

|                             |                |
|-----------------------------|----------------|
| L ≤ 12 [305]                | ± 1 [25] / -0  |
| 12 [305] < L ≤ 60 [1524]    | ± 2 [51] / -0  |
| 60 [1524] < L ≤ 120 [3048]  | ± 4 [102] / -0 |
| 120 [3048] < L ≤ 300 [7620] | ± 6 [152] / -0 |
| 300 [7620] < L              | ± 5% / -0      |

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITE brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: [www.pasternack.com](http://www.pasternack.com)  
E-mail: [sales@pasternack.com](mailto:sales@pasternack.com)

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN CONTAINED  
HEREIN IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

|      |           |          |          |     |
|------|-----------|----------|----------|-----|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
| A    | 53919     | SLI      | PE38344  | A   |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.