



SMB Plug to BNC Male Cable 60 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3428LF-60

Configuration

- Connector 1: SMB Plug
- Connector 2: BNC Male
- Cable Type: RG188

Features

- Max Frequency 3 GHz
- PTFE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3428LF-60 SMB plug to BNC male 60 inch cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMB to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG188 coax. The PE3C3428LF-60 SMB plug to BNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3428LF-60](#)



SMB Plug to BNC Male Cable 60 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3428LF-60

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.45	0.83				dB
Insertion Loss (Typ.)	0.45	0.825				dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

Mechanical Specifications

Cable Assembly

Weight 0.094 lbs [42.64 g]

Cable

Cable Type RG188
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material PTFE, White
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3428LF-60](#)



SMB Plug to BNC Male Cable 60 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3428LF-60

Connectors

Description	Connector 1	Connector 2
Type	SMB Plug	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	50 μ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in. minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3428LF-60](#)



SMB Plug to BNC Male Cable 60 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3428LF-60

How to Order

Part Number Configuration:

PE3C3428LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3428LF-12 = 12 inches long cable
PE3C3428LF-100cm = 100 cm long cable

SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3428LF-60](#)

URL: <https://www.pasternack.com/smb-plug-bnc-male-rg188au-cable-assembly-pe3c3428lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3428LF-60 CAD Drawing

SMB Plug to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS

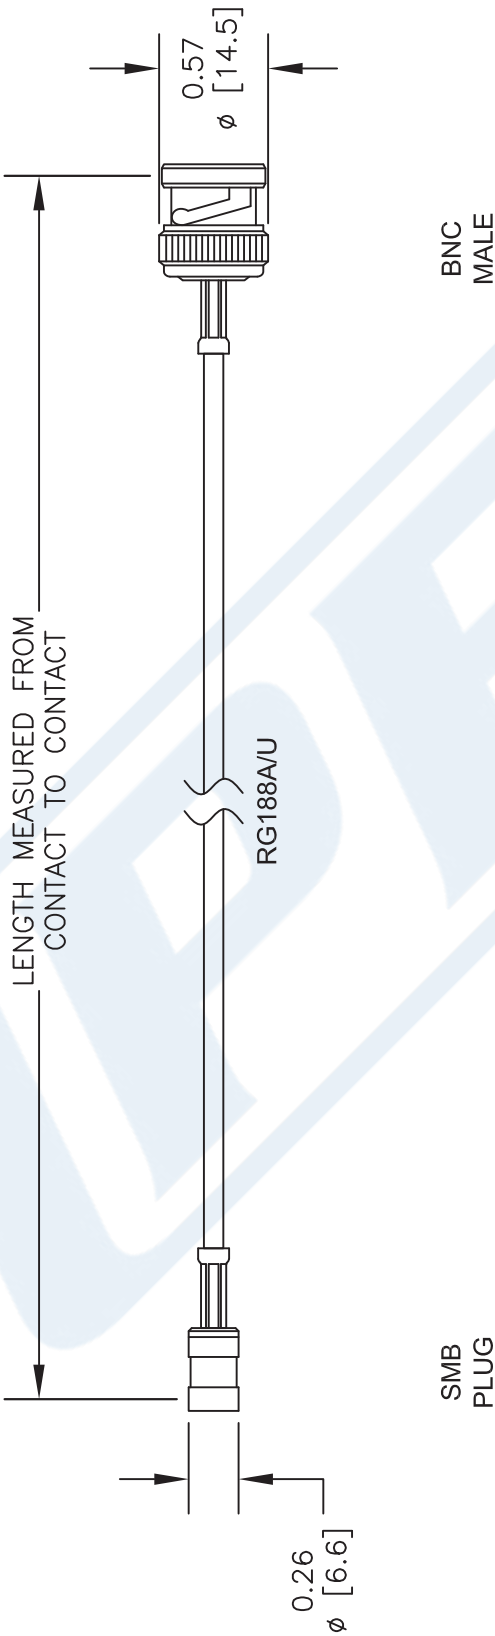

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - 3. DIMENSIONS ARE IN INCHES [mm].
 - 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3C3428LF

FSCM NO. 53919

CAD FILE 102116

SCALE N/A

SIZE A

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com