



10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6034

Features

- DC to 4 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 10 Watt (CW)
- BNC Male Coaxial Interface

Applications

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

Description

Pasternack's PE6034 is an RF termination (also called RF load or dummy load) that operates from DC to 4 GHz and handles up to 10 Watt (CW). Our BNC termination / load has a male gender. PE6034 BNC load termination offers 1.25:1 max VSWR. This Pasternack 10W BNC terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--|---------|---------|---------|-------|
| Frequency Range | DC | | 4 | GHz |
| Impedance | | 50 | | Ohms |
| VSWR | | | 1.25:1 | |
| Input Power (CW) derated linearly to 2W at +125°C | | | 10 | Watts |
| Input Power (Peak) 5µs pulse, 0.05% duty cycle | | | 500 | Watts |

Mechanical Specifications

| | |
|-------------|----------------------|
| Size | |
| Length | 1.84 in [46.74 mm] |
| Width | 1 in [25.4 mm] |
| Weight | 0.0795 lbs [36.06 g] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink PE6034](#)



10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6034

Configuration

| | |
|-------------------------|-------------|
| Connector | BNC Male |
| Connector Specification | MIL-STD-348 |

Material Specifications

| Description | Material | Plating |
|---------------------|----------------------------------|---------|
| Connector 1 Contact | Beryllium Copper | Gold |
| Insulation | PTFE | |
| Body | Brass | Nickel |
| Coupling Nut | Brass | Nickel |
| Housing | Black Anodized Aluminum Heatsink | |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -65 to +125 deg C |
|-----------------|-------------------|

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink PE6034](#)



URL: <https://www.pasternack.com/10-watts-bnc-male-rf-load-up-to-4-ghz-pe6034-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6034 CAD Drawing

10 Watt RF Load Up to 4 GHz With BNC Male Input Black Anodized Aluminum Heatsink

| REVISIONS | | | |
|-----------|-------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | PCR PE6034 | 12/15/2020 | S.PONG |

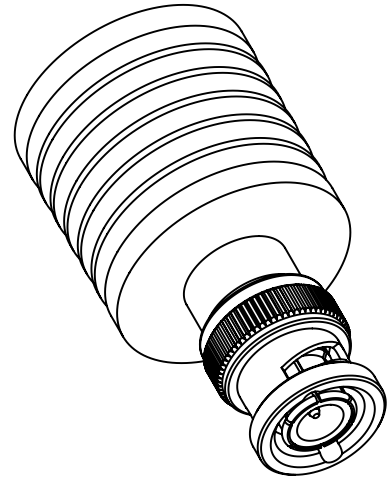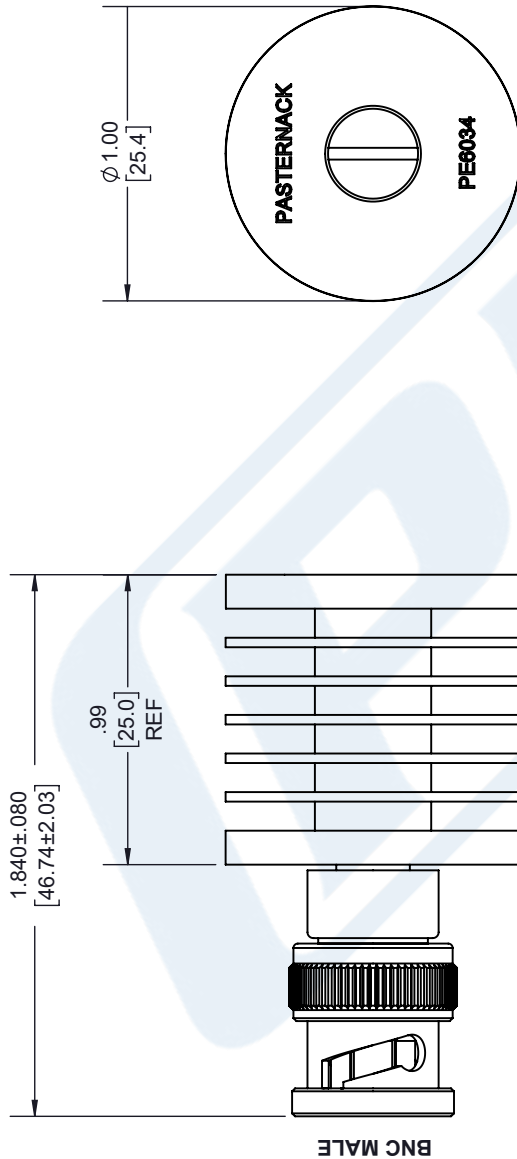

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ± .2 [5.08] FRACTIONS

.XX = ± .02 [.51] ± 1/32

.XXX = ± .005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0

12 [305] < L ≤ 60 [1524] = +2 [51] / -0

60 [1524] < L ≤ 120 [3048] = +4 [102] / -0

120 [3048] < L ≤ 300 [7620] = +6 [152] / -0

300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.

P.O. Box 16759, Irvine, CA 92623.

Phone: 1.949.261.1920 | 1.866.727.8376

Fax: 1.949.261.7451

Website: www.pasternack.com

E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.