



40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini
DIN Male Input Black Anodized Aluminum

RF Terminations Technical Data Sheet

PE6TR1026

Features

- IP67 Indoor/Outdoor Use (Totally dust tight and moisture protected from effects of prolonged immersion under pressure.)
- RF 50 Ohm Impedance
- 698 to 2,700 MHz Frequency Range
- VSWR 1.15:1
- Max Power 40 Watts (CW)
- Low PIM
- 4.1/9.5 Mini DIN Male Coaxial Interface
- DC Open

Applications

- Wireless
- SatCom
- Test and Measurement
- Commercial and Military Communication
- Base Station
- 4G/AWS/PCS

Description

Pasternack's PE6TR1026 is an RF cable termination (also called RF load or dummy load) that operates from 698 to 2,700 MHz and handles up to 40 Watts (CW). Our 4.1/9.5 Mini DIN termination / load is a 50 Ohm impedance and has a male gender. PE6TR1026 load termination offers 1.15:1 VSWR and low PIM (passive intermodulation) of 160 dBc. This Pasternack 40 Watts terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, hybrids, and combiners. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watts (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.698		2.7	GHz
Impedance		50		Ohms
VSWR		1.07:1	1.15:1	
Return Loss		30	23	dB
Passive Intermodulation	-160			dBc
Input Power (CW)			40	Watts

Mechanical Specifications

Size

Length	6.77 in [171.96 mm]
Width	1.75 in [44.45 mm]
Height	2.78 in [70.61 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN Male Input Black Anodized Aluminum PE6TR1026](#)



40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN Male Input Black Anodized Aluminum

RF Terminations Technical Data Sheet

PE6TR1026

Weight 1.503 lbs [681.75 g]

Configuration

Connector 4.1/9.5 Mini DIN Male

Material Specifications

Description	Material	Plating
Housing	Black Anodized Aluminum	

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant
REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

Typical Performance Data

Passive Intermodulation Test Data

Tone 1 Frequency (MHz)	Tone 2 Frequency (MHz)	IM3 Frequency (MHz)	PIM Minimum (dBc)
1945.0	1990.0	1900.0	-160.0
P1	P2	PIM	Result
43.0 dBm	43.0 dBm	-169.6 dBc	Pass


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN Male Input Black Anodized Aluminum PE6TR1026](#)



40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini
DIN Male Input Black Anodized Aluminum

RF Terminations Technical Data Sheet

PE6TR1026

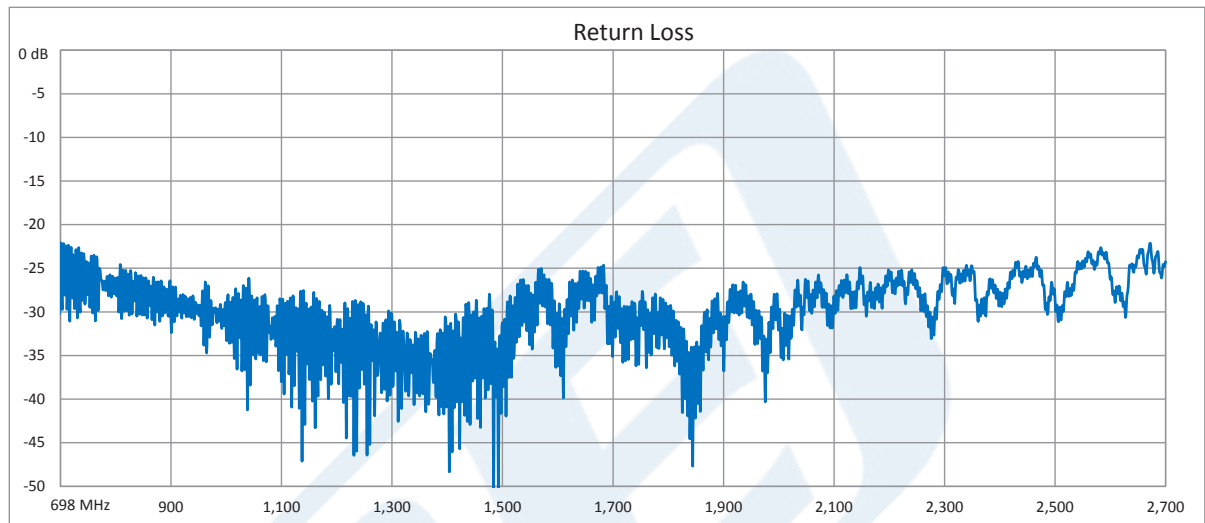

40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN Male Input Black Anodized Aluminum from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN Male Input Black Anodized Aluminum PE6TR1026](#)


URL: <https://www.pasternack.com/40-watts-4.1-9.5-mini-din-male-rf-load-up-to-2.7-ghz-low-pim-pe6tr1026-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6TR1026 CAD Drawing

40 Watt RF Load Up to 2.7 GHz With 4.1/9.5 Mini DIN

Male Input Black Anodized Aluminum

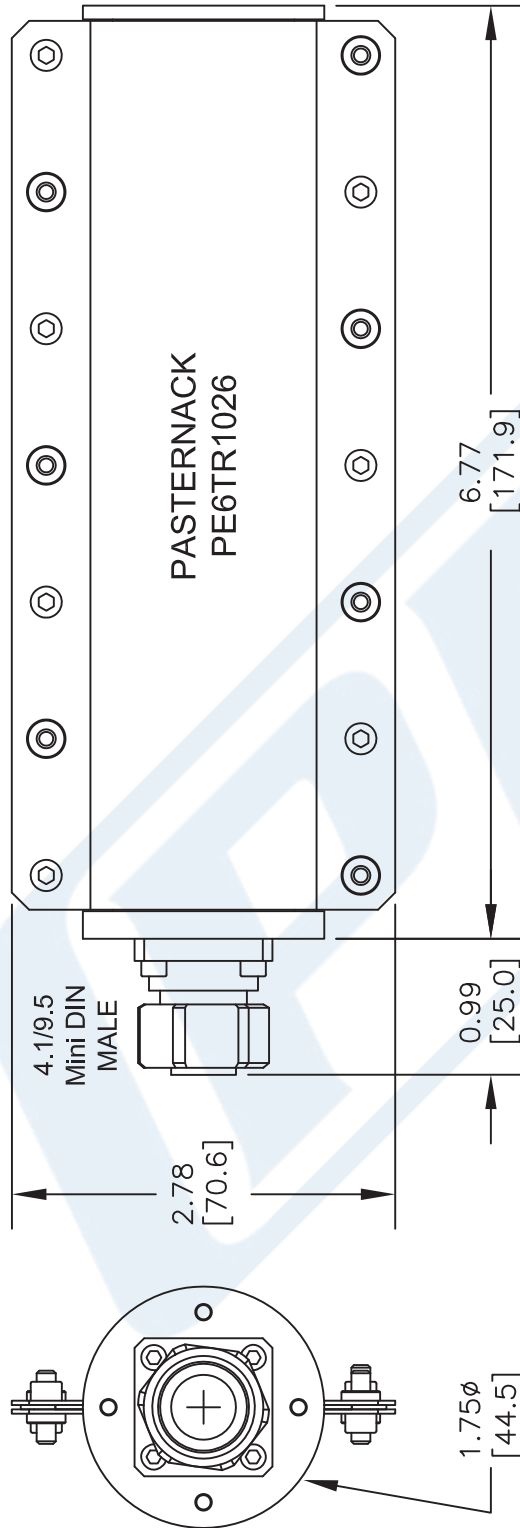

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: inches
TOLERANCES ARE: [mm]
HOLE TOLERANCE: X.XXX ± .003 [±.076]
LENGTH TOLERANCE: X.XXX ± .010 [±.254]
LENGTH TOLERANCE: X.XX ± .030 [±.762]

* THESE DIMENSIONS AND TOLERANCES
SUPERSEDE NOTE #1 ON TITLE BLOCK.

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE6TR1026

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

2233