



75 Ohm TNC Female to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9630

Configuration

- TNC Female Connector 1
- BNC Male Connector 2
- 75 Ohms
- Straight Body Geometry

Features

- Typical VSWR of 1.4:1 up to 1,000 MHz
- Gold Plated Brass Contact
- 50 µ-in min Gold Contact Plating

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Pasternack's PE9630 75 ohm TNC female to BNC male adapter is part of our full line of RF components available for same-day shipping. Our TNC to BNC adapter has a female to male gender configuration. PE9630 TNC female to BNC male adapter operates to 1,000 MHz.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR		1.4:1		

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	1.233 in [31.32 mm]
Width	0.57 in [14.48 mm]
Weight	0.041 lbs [18.6 g]

Description	Connector 1	Connector 2
Type	TNC Female	BNC Male
Polarity	Standard	Standard

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Female to BNC Male Adapter PE9630](#)



75 Ohm TNC Female to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9630

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	TNC Female		BNC Male	
Contact	Brass	Gold 50 µ-in minimum	Brass	Gold 50 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Nickel 100 µ-in minimum		
Body			Brass	Nickel 100 µ-in minimum
Gasket			Silicone	
Coupling Nut			Brass	Nickel 100 µ-in minimum

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Female to BNC Male Adapter PE9630](#)




75 Ohm TNC Female to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9630

Typical Performance Data

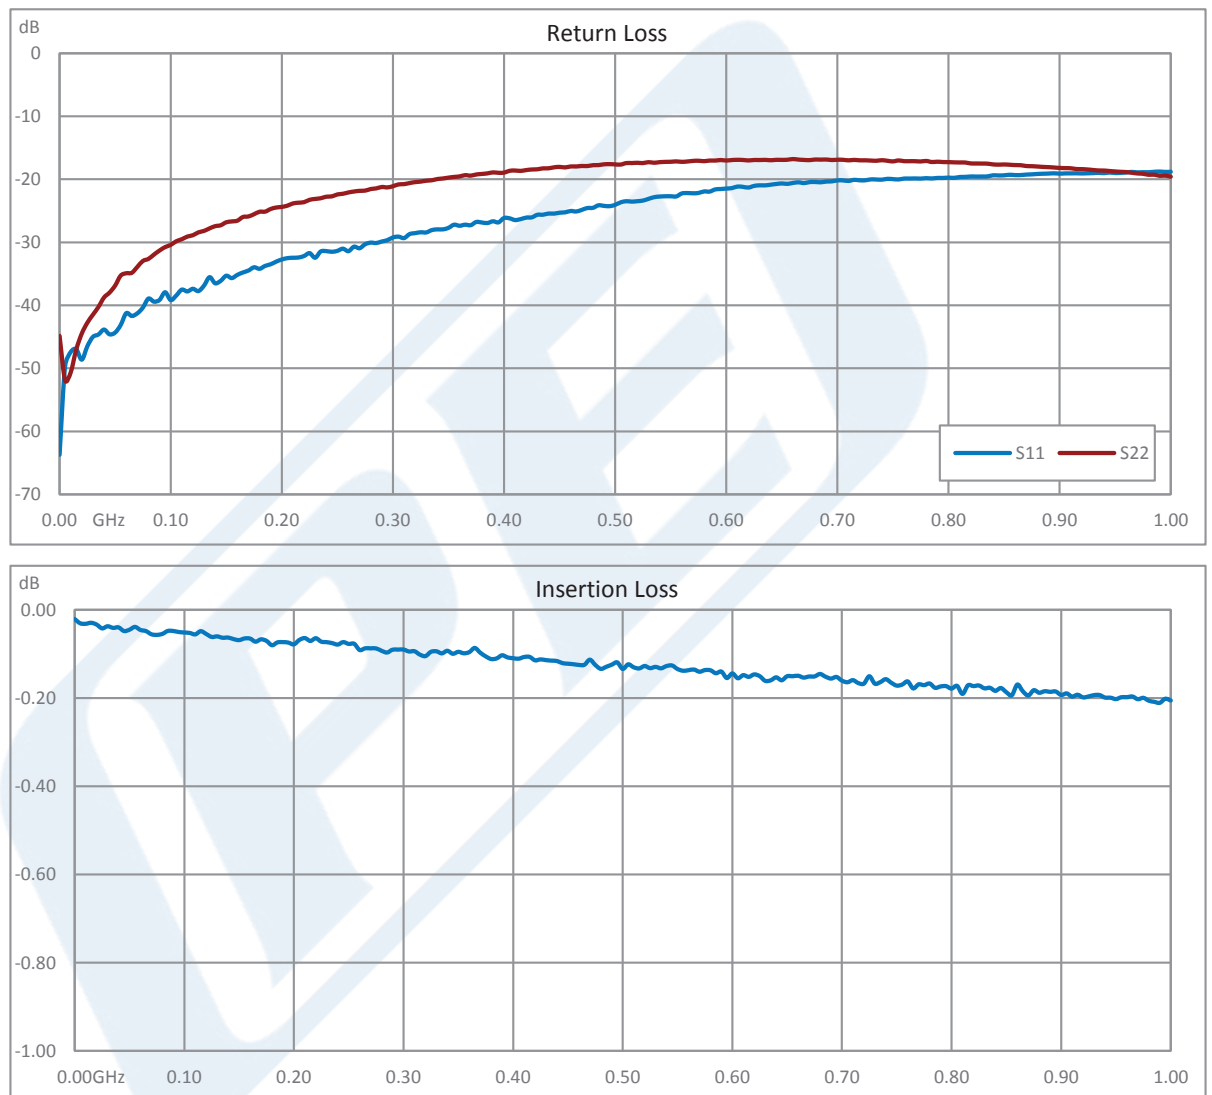

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Female to BNC Male Adapter PE9630](#)



75 Ohm TNC Female to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9630


75 Ohm TNC Female to BNC Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Female to BNC Male Adapter PE9630](https://www.pasternack.com/tnc-female-bnc-male-straight-adapter-pe9630-p.aspx)

URL: <https://www.pasternack.com/tnc-female-bnc-male-straight-adapter-pe9630-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9630 CAD Drawing
75 Ohm TNC Female to BNC Male Adapter

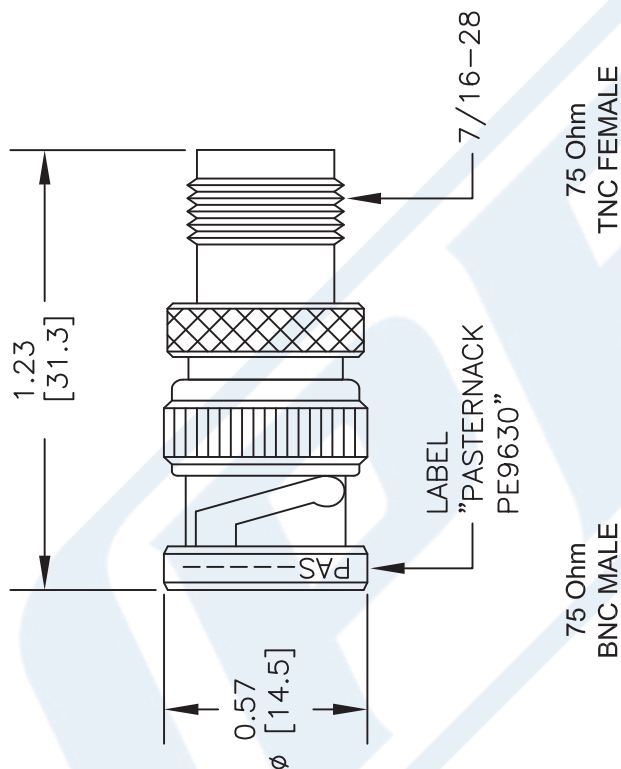

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE9630

FSCM NO. 53919

CAD FILE 061716

SCALE N/A

SIZE A

2233

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].