

# TPS2290x 3.6-V, 500-mA, 78-mΩ ON-Resistance Load Switch With Controlled Turnon

## 1 Features

- Integrated P-Channel Load Switch
- Low Input Voltage: 1 V to 3.6 V
- ON-Resistance (Typical Values)
  - $r_{ON} = 78 \text{ m}\Omega$  at  $V_{IN} = 3.6 \text{ V}$
  - $r_{ON} = 93 \text{ m}\Omega$  at  $V_{IN} = 2.5 \text{ V}$
  - $r_{ON} = 109 \text{ m}\Omega$  at  $V_{IN} = 1.8 \text{ V}$
  - $r_{ON} = 146 \text{ m}\Omega$  at  $V_{IN} = 1.2 \text{ V}$
- 500 mA Maximum Continuous Switch Current
- Quiescent Current: 82 nA at 1.8 V
- Shutdown Current: 44 nA at 1.8 V
- Low Control Input Thresholds Enable Use of 1.2-V, 1.8-V, 2.5-V, and 3.3-V Logic
- Controlled Slew Rate to Avoid Inrush Currents
  - $t_r = 40 \text{ }\mu\text{s}$  at  $V_{IN} = 1.8 \text{ V}$  (TPS22901/2)
  - $t_r = 220 \text{ }\mu\text{s}$  at  $V_{IN} = 1.8 \text{ V}$  (TPS22902B)
- Quick Output Discharge (TPS22902/2B)
- ESD Performance Tested Per JESD 22
  - 2000-V Human Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)
- Four-Pin Wafer-Chip-Scale DSBGA Package
  - 0.8-mm × 0.8-mm, 0.4-mm Pitch, 0.5-mm Height (YFP)

## 2 Applications

- Personal Digital Assistants (PDAs)
- Cellular Phones
- GPS Devices
- MP3 Players
- Digital Cameras
- Peripheral Ports
- Portable Instrumentation
- RF Modules

## 3 Description


The TPS22901, TPS22902, and TPS22902B are small, low ON-resistance ( $r_{ON}$ ) load switches with a controlled turnon. These devices contain a P-channel MOSFET that operates over an input voltage range of 1.0 V to 3.6 V. The switch is controlled by an on/off input (ON), which can interface directly with low-voltage control signals. In the TPS22902 and TPS22902B, an 88-Ω on-chip load resistor is added for output quick discharge when the switch is turned off.

The TPS22901, TPS22902, and TPS22902B are available in a space-saving 4-pin DSBGA (YFP) with 0.4-mm pitch. These devices are characterized for operation over the free-air temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

### Device Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | BODY SIZE (NOM)   |
|-------------|------------------------|-------------------|
| TPS22901    | DSBGA (4)              | 0.80 mm × 0.80 mm |
| TPS22902    |                        |                   |
| TPS22902B   |                        |                   |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

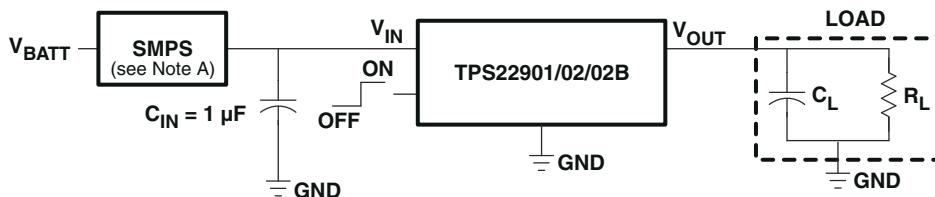

A. Switched-mode power supply

**Typical Application Schematic**



## Table of Contents

|                                                                 |           |                                                                  |           |
|-----------------------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                                         | <b>1</b>  | <b>9 Detailed Description</b> .....                              | <b>20</b> |
| <b>2 Applications</b> .....                                     | <b>1</b>  | 9.1 Overview.....                                                | 20        |
| <b>3 Description</b> .....                                      | <b>1</b>  | 9.2 Functional Block Diagram.....                                | 20        |
| <b>4 Revision History</b> .....                                 | <b>2</b>  | 9.3 Feature Description.....                                     | 20        |
| <b>5 Device Comparison Table</b> .....                          | <b>3</b>  | 9.4 Device Functional Modes.....                                 | 20        |
| <b>6 Pin Configuration and Functions</b> .....                  | <b>3</b>  | <b>10 Application and Implementation</b> .....                   | <b>21</b> |
| <b>7 Specifications</b> .....                                   | <b>4</b>  | 10.1 Application Information.....                                | 21        |
| 7.1 Absolute Maximum Ratings.....                               | 4         | 10.2 Typical Application.....                                    | 21        |
| 7.2 ESD Ratings.....                                            | 4         | <b>11 Power Supply Recommendations</b> .....                     | <b>24</b> |
| 7.3 Recommended Operating Conditions.....                       | 4         | <b>12 Layout</b> .....                                           | <b>24</b> |
| 7.4 Thermal Information.....                                    | 4         | 12.1 Layout Guidelines.....                                      | 24        |
| 7.5 Electrical Characteristics.....                             | 5         | 12.2 Layout Example.....                                         | 24        |
| 7.6 Switching Characteristics ( $V_{IN} = 1.1\text{ V}$ ).....  | 6         | <b>13 Device and Documentation Support</b> .....                 | <b>25</b> |
| 7.7 Switching Characteristics ( $V_{IN} = 1.2\text{ V}$ ).....  | 6         | 13.1 Related Links.....                                          | 25        |
| 7.8 Switching Characteristics ( $V_{IN} = 1.8\text{ V}$ ).....  | 7         | 13.2 Trademarks.....                                             | 25        |
| 7.9 Switching Characteristics ( $V_{IN} = 2.5\text{ V}$ ).....  | 7         | 13.3 Electrostatic Discharge Caution.....                        | 25        |
| 7.10 Switching Characteristics ( $V_{IN} = 3.0\text{ V}$ )..... | 8         | 13.4 Glossary.....                                               | 25        |
| 7.11 Switching Characteristics ( $V_{IN} = 3.6\text{ V}$ )..... | 8         | <b>14 Mechanical, Packaging, and Orderable Information</b> ..... | <b>25</b> |
| 7.12 Typical Characteristics.....                               | 9         |                                                                  |           |
| <b>8 Parameter Measurement Information</b> .....                | <b>19</b> |                                                                  |           |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


|                                                                                                                                                                                                                                                                                                                                                    |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>Changes from Revision D (January 2015) to Revision E (September 2020)</b> .....                                                                                                                                                                                                                                                                 | <b>Page</b> |
| • Updated the numbering format for tables, figures and cross-references throughout the document.....                                                                                                                                                                                                                                               | <b>1</b>    |
| <b>Changes from Revision C (December 2012) to Revision D (January 2015)</b> .....                                                                                                                                                                                                                                                                  | <b>Page</b> |
| • Added <i>ESD Rating</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section..... | <b>1</b>    |
| • Deleted the <i>ORDERING INFORMATION</i> table.....                                                                                                                                                                                                                                                                                               | <b>3</b>    |
| <b>Changes from Revision B (March 2009) to Revision C (December 2012)</b> .....                                                                                                                                                                                                                                                                    | <b>Page</b> |
| • Changed the <i>ORDERING INFORMATION</i> table.....                                                                                                                                                                                                                                                                                               | <b>3</b>    |

## 5 Device Comparison Table

|           | $R_{ON}$ at 1.8 V (TYP) | RISE TIME (TYP at 1.8 V) | QUICK OUTPUT DISCHARGE <sup>(1)</sup> | MAX OUTPUT CURRENT | ENABLE      |
|-----------|-------------------------|--------------------------|---------------------------------------|--------------------|-------------|
| TPS22901  | 109 mΩ                  | 40 μs                    | No                                    | 500 mA             | Active high |
| TPS22902  |                         |                          | Yes                                   |                    |             |
| TPS22902B |                         | 220 μs                   | Yes                                   |                    |             |

(1) This feature discharges the output of the switch to ground through an 88 Ω resistor, preventing the output from floating.

## 6 Pin Configuration and Functions



**Figure 6-1. YFP Package 4-Pin DSBGA**

### Pin Assignments

|          |          |           |
|----------|----------|-----------|
| <b>B</b> | ON       | GND       |
| <b>A</b> | $V_{IN}$ | $V_{OUT}$ |
|          | <b>2</b> | <b>1</b>  |

### Pin Functions

| PIN |           | I/O | DESCRIPTION                                                        |
|-----|-----------|-----|--------------------------------------------------------------------|
| NO. | NAME      |     |                                                                    |
| A1  | $V_{OUT}$ | O   | Switch output                                                      |
| A2  | $V_{IN}$  | I   | Switch input, bypass this input with a ceramic capacitor to ground |
| B1  | GND       | -   | Ground                                                             |
| B2  | ON        | I   | Switch control input, active high                                  |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                   |                                                | MIN  | MAX                   | UNIT |
|-------------------|------------------------------------------------|------|-----------------------|------|
| V <sub>IN</sub>   | Input voltage                                  | −0.3 | 4                     | V    |
| V <sub>OUT</sub>  | Output voltage                                 |      | V <sub>IN</sub> + 0.3 | V    |
| V <sub>ON</sub>   | Input voltage                                  | −0.3 | 4                     | V    |
| P                 | Power dissipation at T <sub>A</sub> = 25°C     |      | 0.48                  | W    |
| I <sub>MAX</sub>  | Maximum continuous switch current              |      | 500                   | mA   |
| T <sub>A</sub>    | Operating free-air temperature                 | −40  | 85                    | °C   |
| T <sub>lead</sub> | Maximum lead temperature (10-s soldering time) |      | 300                   | °C   |
| T <sub>stg</sub>  | Storage temperature                            | −65  | 150                   | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under [Section 7.3](#). Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |
|                    |                         |                                                                                | V     |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

|                  |                              | MIN                | MAX             | UNIT |
|------------------|------------------------------|--------------------|-----------------|------|
| V <sub>IN</sub>  | Input voltage                | 1                  | 3.6             | V    |
| V <sub>OUT</sub> | Output voltage               |                    | V <sub>IN</sub> | V    |
| V <sub>IH</sub>  | High-level input voltage, ON | 0.85               | 3.6             | V    |
| V <sub>IL</sub>  | Low-level input voltage, ON  |                    | 0.4             | V    |
| C <sub>IN</sub>  | Input capacitor              | See <sup>(1)</sup> |                 | μF   |

- (1) See [Section 10.1.1](#).

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS2290X    | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | YFP (DSBGA) |      |
|                               |                                              | 4 PINS      |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 192.1       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 2.3         |      |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 35.8        |      |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 11.8        |      |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 35.6        |      |

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

$V_{IN} = 1.0\text{ V}$  to  $3.6\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (unless otherwise noted). Typical values are for  $T_A = 25^\circ\text{C}$

| PARAMETER         |                            | TEST CONDITIONS                                                                                | $T_A$                   | MIN                | TYP | MAX | UNIT       |
|-------------------|----------------------------|------------------------------------------------------------------------------------------------|-------------------------|--------------------|-----|-----|------------|
| $I_Q$             | Quiescent current          | $I_{OUT} = 0$ , $V_{IN} = V_{ON}$                                                              | $V_{IN} = 1.1\text{ V}$ | Full               | 37  | 120 | nA         |
|                   |                            |                                                                                                | $V_{IN} = 1.8\text{ V}$ | Full               | 82  | 235 |            |
|                   |                            |                                                                                                | $V_{IN} = 3.6\text{ V}$ | Full               | 204 | 880 |            |
| $I_{IN(OFF)}$     | OFF-state supply current   | $V_{ON} = \text{GND}$ , $V_{OUT} = \text{Open}$                                                | $V_{IN} = 1.1\text{ V}$ | Full               | 22  | 210 | nA         |
|                   |                            |                                                                                                | $V_{IN} = 1.8\text{ V}$ | Full               | 44  | 260 |            |
|                   |                            |                                                                                                | $V_{IN} = 3.6\text{ V}$ | Full               | 137 | 700 |            |
| $I_{IN(LEAKAGE)}$ | OFF-state switch current   | $V_{ON} = \text{GND}$ , $V_{OUT} = 0\text{ V}$                                                 | $V_{IN} = 1.1\text{ V}$ | Full               | 22  | 140 | nA         |
|                   |                            |                                                                                                | $V_{IN} = 1.8\text{ V}$ | Full               | 45  | 230 |            |
|                   |                            |                                                                                                | $V_{IN} = 3.6\text{ V}$ | Full               | 137 | 610 |            |
| $r_{ON}$          | ON-state resistance        | $I_{OUT} = -200\text{ mA}$                                                                     | $V_{IN} = 3.6\text{ V}$ | $25^\circ\text{C}$ | 78  | 95  | m $\Omega$ |
|                   |                            |                                                                                                |                         | Full               |     | 95  |            |
|                   |                            |                                                                                                | $V_{IN} = 2.5\text{ V}$ | $25^\circ\text{C}$ | 93  | 110 |            |
|                   |                            |                                                                                                |                         | Full               |     | 110 |            |
|                   |                            |                                                                                                | $V_{IN} = 1.8\text{ V}$ | $25^\circ\text{C}$ | 109 | 130 |            |
|                   |                            |                                                                                                |                         | Full               |     | 130 |            |
|                   |                            |                                                                                                | $V_{IN} = 1.2\text{ V}$ | $25^\circ\text{C}$ | 146 | 200 |            |
|                   |                            |                                                                                                |                         | Full               |     | 200 |            |
| $r_{PD}$          | Output pulldown resistance | $V_{IN} = 3.3\text{ V}$ , $V_{ON} = 0$ , $I_{OUT} = 30\text{ mA}$<br>(TPS22902/TPS22902B only) | $25^\circ\text{C}$      |                    | 88  | 120 | $\Omega$   |
|                   |                            |                                                                                                |                         |                    |     |     |            |
| $I_{ON}$          | ON input leakage current   | $V_{ON} = 1.1\text{ V}$ to $3.6\text{ V}$ or GND                                               | Full                    |                    |     | 25  | nA         |

## 7.6 Switching Characteristics ( $V_{IN} = 1.1\text{ V}$ )

$V_{IN} = 1.1\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 108  |     |                         | 108 |     |                          | 531 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 131  |     |                         | 131 |     |                          | 596 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 153  |     |                         | 153 |     |                          | 659 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 39   |     |                         | 11  |     |                          | 11  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 317  |     |                         | 69  |     |                          | 67  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1105 |     |                         | 238 |     |                          | 225 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 70   |     |                         | 70  |     |                          | 365 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 78   |     |                         | 78  |     |                          | 367 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 92   |     |                         | 92  |     |                          | 395 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 107  |     |                         | 18  |     |                          | 21  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 966  |     |                         | 175 |     |                          | 189 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3532 |     |                         | 632 |     |                          | 565 |     |               |

(1) Quick Output Discharge

## 7.7 Switching Characteristics ( $V_{IN} = 1.2\text{ V}$ )

$V_{IN} = 1.2\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 96   |     |                         | 96  |     |                          | 471 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 116  |     |                         | 116 |     |                          | 527 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 135  |     |                         | 135 |     |                          | 587 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 39   |     |                         | 10  |     |                          | 10  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 317  |     |                         | 62  |     |                          | 61  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1110 |     |                         | 210 |     |                          | 199 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 62   |     |                         | 62  |     |                          | 324 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 69   |     |                         | 69  |     |                          | 325 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 81   |     |                         | 81  |     |                          | 350 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 109  |     |                         | 17  |     |                          | 20  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 995  |     |                         | 163 |     |                          | 175 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3650 |     |                         | 587 |     |                          | 523 |     |               |

(1) Quick Output Discharge

## 7.8 Switching Characteristics ( $V_{IN} = 1.8\text{ V}$ )

$V_{IN} = 1.8\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 61   |     |                         | 61  |     |                          | 302 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 72   |     |                         | 72  |     |                          | 335 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 83   |     |                         | 83  |     |                          | 367 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 38   |     |                         | 8   |     |                          | 8   |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 317  |     |                         | 49  |     |                          | 49  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1135 |     |                         | 169 |     |                          | 167 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 40   |     |                         | 40  |     |                          | 220 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 45   |     |                         | 45  |     |                          | 220 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 53   |     |                         | 53  |     |                          | 235 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 111  |     |                         | 15  |     |                          | 15  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 1020 |     |                         | 140 |     |                          | 159 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3700 |     |                         | 517 |     |                          | 481 |     |               |

(1) Quick Output Discharge

## 7.9 Switching Characteristics ( $V_{IN} = 2.5\text{ V}$ )

$V_{IN} = 2.5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 45   |     |                         | 45  |     |                          | 223 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 53   |     |                         | 53  |     |                          | 246 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 61   |     |                         | 61  |     |                          | 268 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 38   |     |                         | 7   |     |                          | 7   |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 314  |     |                         | 46  |     |                          | 47  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1140 |     |                         | 161 |     |                          | 158 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 32   |     |                         | 32  |     |                          | 175 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 35   |     |                         | 35  |     |                          | 175 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 41   |     |                         | 41  |     |                          | 187 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 113  |     |                         | 14  |     |                          | 18  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 1040 |     |                         | 139 |     |                          | 185 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3795 |     |                         | 516 |     |                          | 471 |     |               |

(1) Quick Output Discharge

## 7.10 Switching Characteristics ( $V_{IN} = 3.0\text{ V}$ )

$V_{IN} = 3.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 38   |     |                         | 38  |     |                          | 191 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 45   |     |                         | 45  |     |                          | 211 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 53   |     |                         | 53  |     |                          | 231 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 38   |     |                         | 7   |     |                          | 7   |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 320  |     |                         | 46  |     |                          | 46  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1145 |     |                         | 53  |     |                          | 156 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 28   |     |                         | 28  |     |                          | 159 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 31   |     |                         | 31  |     |                          | 160 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 37   |     |                         | 37  |     |                          | 170 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 114  |     |                         | 14  |     |                          | 17  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 1045 |     |                         | 139 |     |                          | 160 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3815 |     |                         | 509 |     |                          | 473 |     |               |

(1) Quick Output Discharge

## 7.11 Switching Characteristics ( $V_{IN} = 3.6\text{ V}$ )

$V_{IN} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)


| PARAMETER                 | TEST CONDITIONS     |                          | TPS22901 |      |     | TPS22902 <sup>(1)</sup> |     |     | TPS22902B <sup>(1)</sup> |     |     | UNIT          |
|---------------------------|---------------------|--------------------------|----------|------|-----|-------------------------|-----|-----|--------------------------|-----|-----|---------------|
|                           |                     |                          | MIN      | TYP  | MAX | MIN                     | TYP | MAX | MIN                      | TYP | MAX |               |
| $t_{ON}$ Turn-ON time     | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 33   |     |                         | 33  |     |                          | 166 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 39   |     |                         | 39  |     |                          | 183 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 46   |     |                         | 46  |     |                          | 201 |     |               |
| $t_{OFF}$ Turn-OFF time   | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 38   |     |                         | 7   |     |                          | 7   |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 322  |     |                         | 46  |     |                          | 45  |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 1145 |     |                         | 156 |     |                          | 155 |     |               |
| $t_r$ $V_{OUT}$ rise time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 25   |     |                         | 25  |     |                          | 146 |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 28   |     |                         | 28  |     |                          | 146 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 34   |     |                         | 34  |     |                          | 156 |     |               |
| $t_f$ $V_{OUT}$ fall time | $R_L = 500\ \Omega$ | $C_L = 0.1\ \mu\text{F}$ |          | 116  |     |                         | 14  |     |                          | 17  |     | $\mu\text{s}$ |
|                           |                     | $C_L = 1\ \mu\text{F}$   |          | 1060 |     |                         | 139 |     |                          | 161 |     |               |
|                           |                     | $C_L = 3.3\ \mu\text{F}$ |          | 3840 |     |                         | 512 |     |                          | 475 |     |               |

(1) Quick Output Discharge




## 7.12 Typical Characteristics


### 7.12.1 Typical DC Characteristics

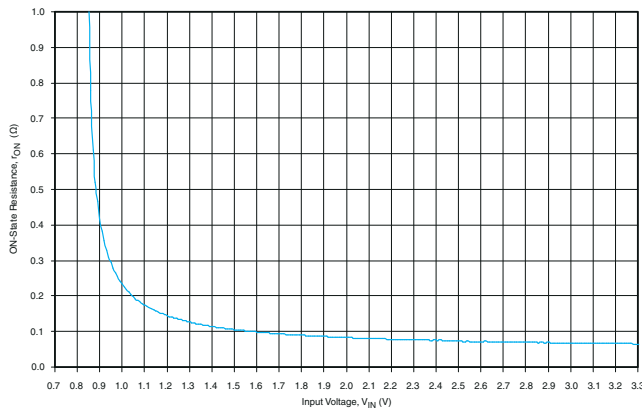


**Figure 7-1.  $r_{ON}$  vs  $V_{IN}$**

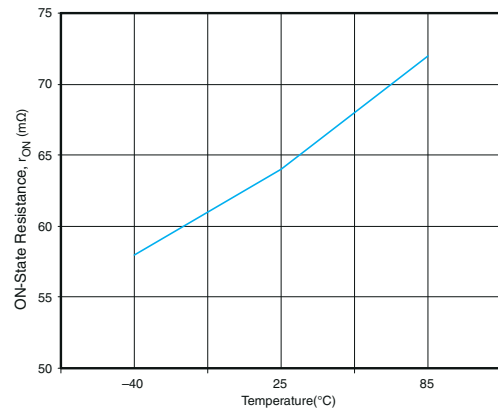


**Figure 7-2.  $r_{ON}$  vs Temperature ( $V_{IN} = 3.3\text{ V}$ )**

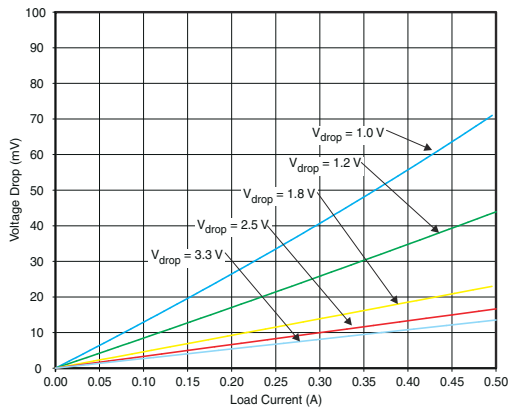


**Figure 7-3. Voltage Drop vs. Load Current**

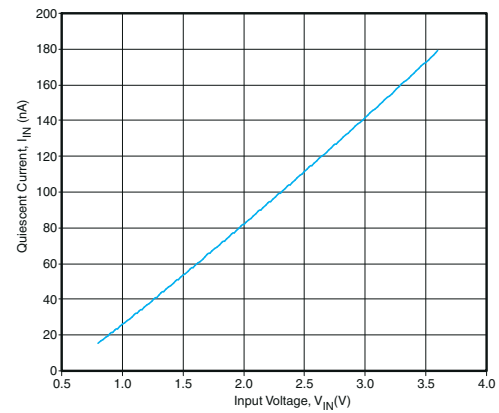


**Figure 7-4. Quiescent Current vs  $V_{IN}$  ( $V_{ON} = V_{IN}$ ,  $I_{OUT} = 0$ )**

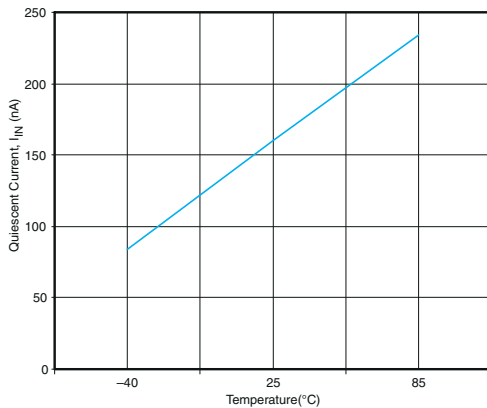


**Figure 7-5. Quiescent Current vs Temperature ( $V_{IN} = 3.3\text{ V}$ ,  $I_{OUT} = 0$ )**

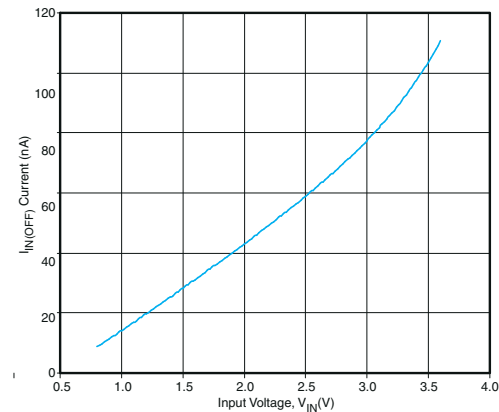


**Figure 7-6.  $I_{IN(OFF)}$  vs  $V_{IN}$  ( $V_{ON} = 0\text{ V}$ )**

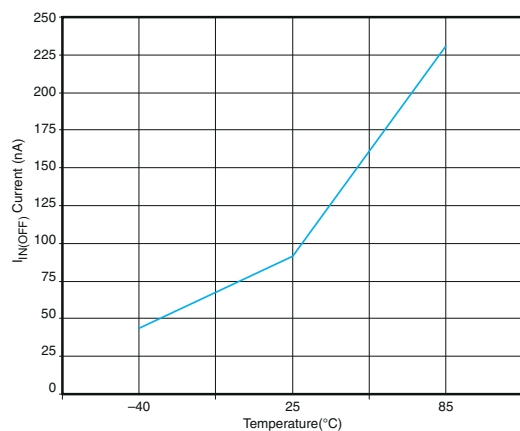


**Figure 7-7.  $I_{IN(OFF)}$  vs Temperature ( $V_{IN} = 3.3$  V)**

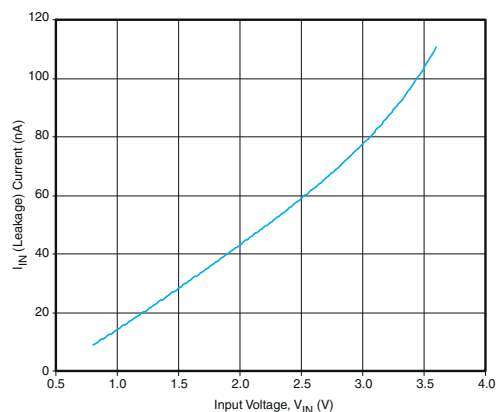

**Figure 7-8.  $I_{IN(Leakage)}$  vs  $V_{IN}$  ( $I_{OUT} = 0$ )**

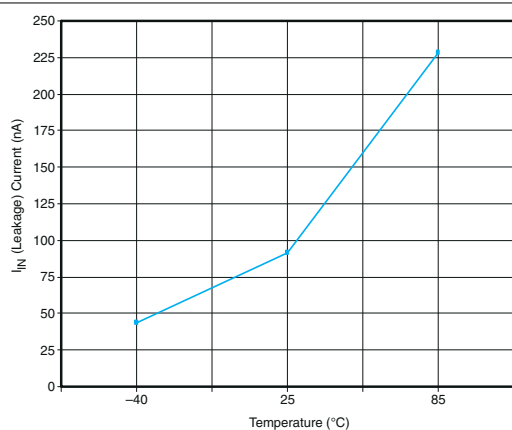


**Figure 7-9.  $I_{IN(Leakage)}$  vs Temperature ( $V_{IN} = 3.3$  V)**

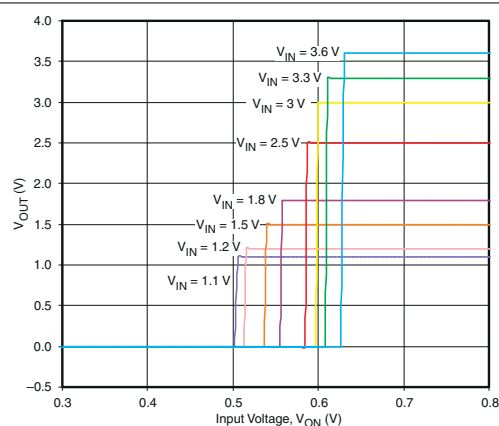


**Figure 7-10. ON-Input Threshold**

## 7.12.2 Typical AC Characteristics

### 7.12.2.1 TPS22901

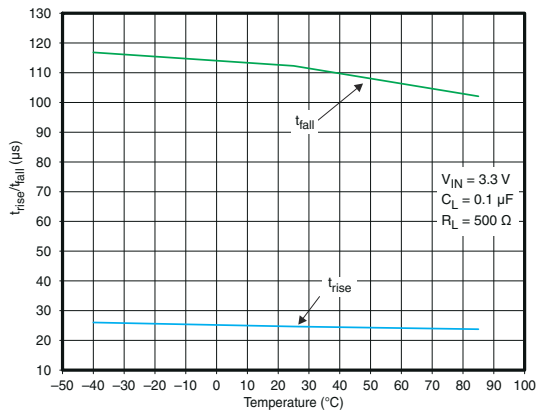


**Figure 7-11.  $t_{rise}/t_{fall}$  vs Temperature**

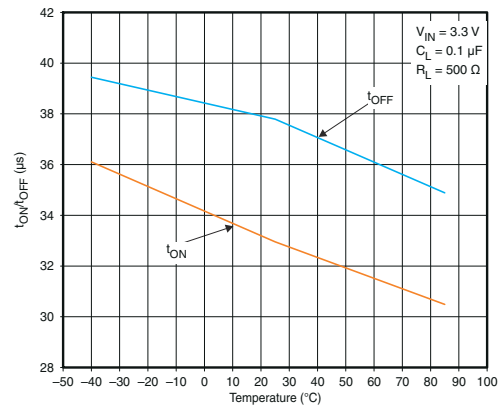


**Figure 7-12.  $t_{ON}/t_{OFF}$  vs Temperature**

### 7.12.2.2 TPS22902

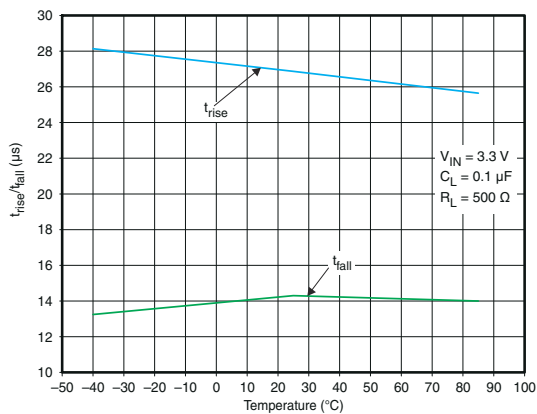


**Figure 7-13.  $t_{rise}/t_{fall}$  vs Temperature**

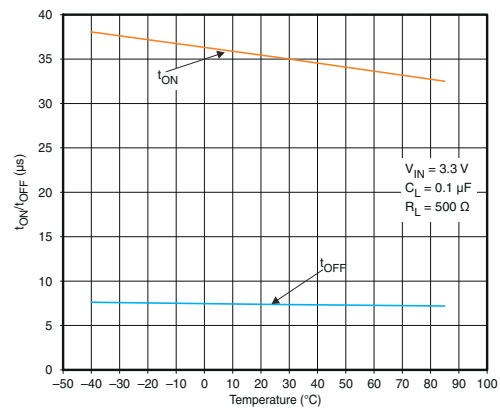


**Figure 7-14.  $t_{ON}/t_{OFF}$  vs Temperature**

### 7.12.2.3 TPS22902B

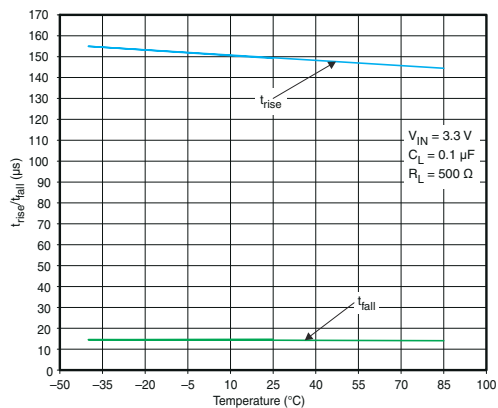

**Figure 7-15.  $t_{rise}/t_{fall}$  vs Temperature**

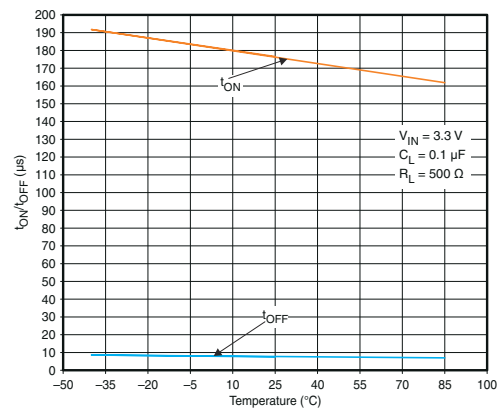

**Figure 7-16.  $t_{ON}/t_{OFF}$  vs Temperature**

### 7.12.2.4 TPS22901 and TPS22902

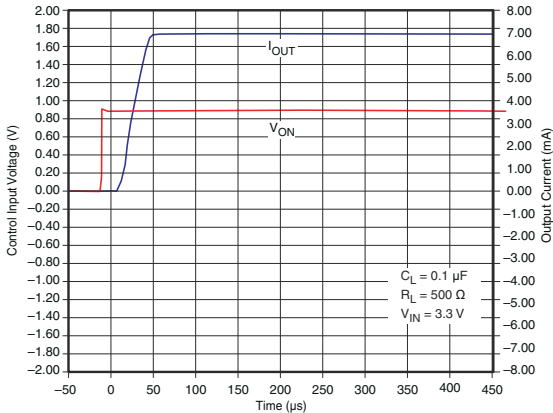


Figure 7-17.  $t_{ON}$  Response

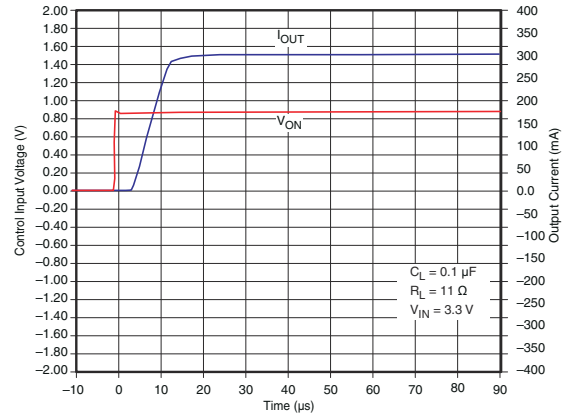


Figure 7-18.  $t_{ON}$  Response

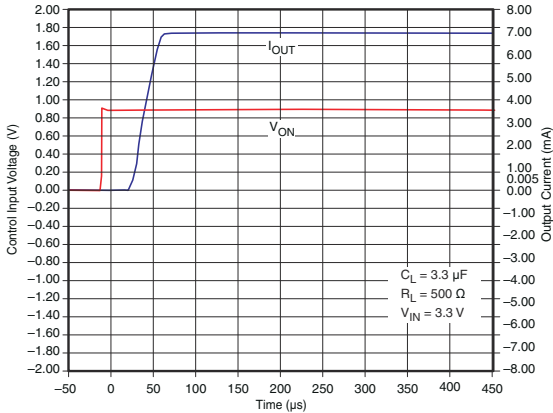


Figure 7-19.  $t_{ON}$  Response

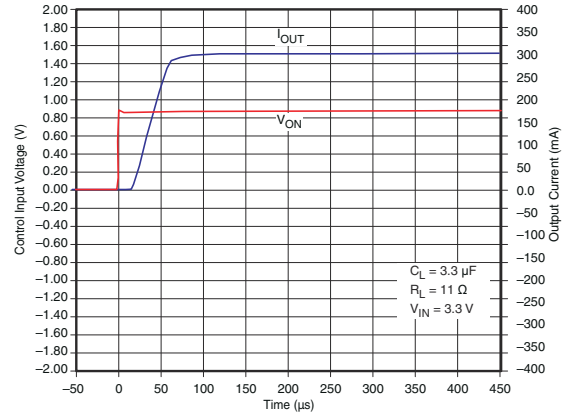


Figure 7-20.  $t_{ON}$  Response

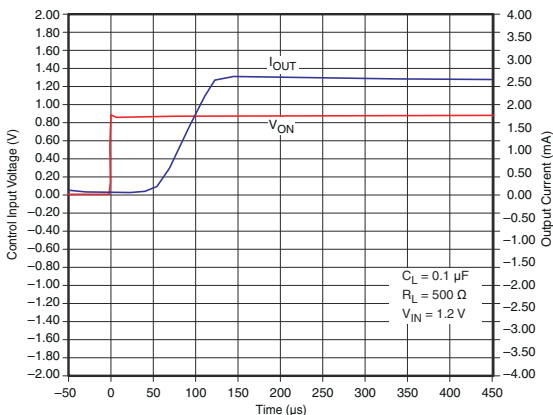


Figure 7-21.  $t_{ON}$  Response



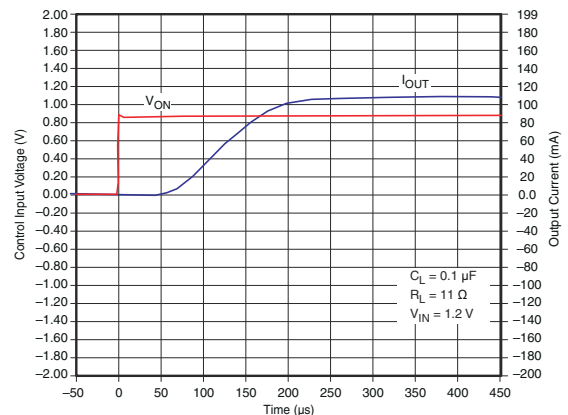


Figure 7-22.  $t_{ON}$  Response

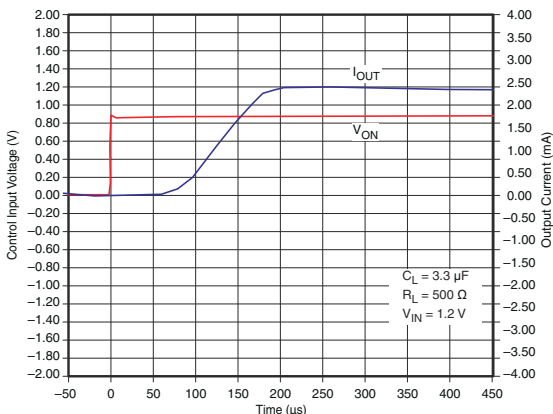


**Figure 7-23.  $t_{ON}$  Response**

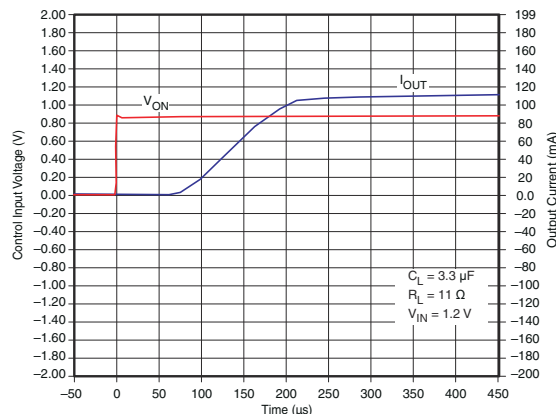


**Figure 7-24.  $t_{ON}$  Response**


### 7.12.2.5 TPS22901

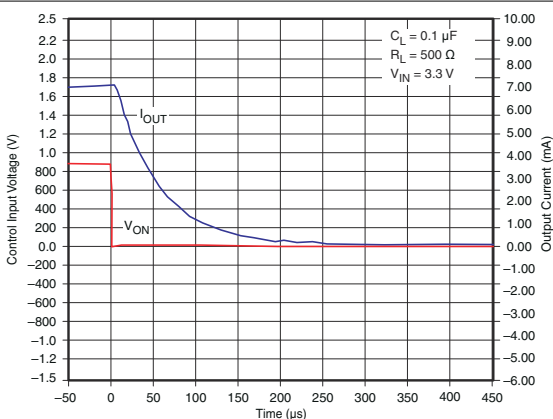


**Figure 7-25.  $t_{OFF}$  Response**

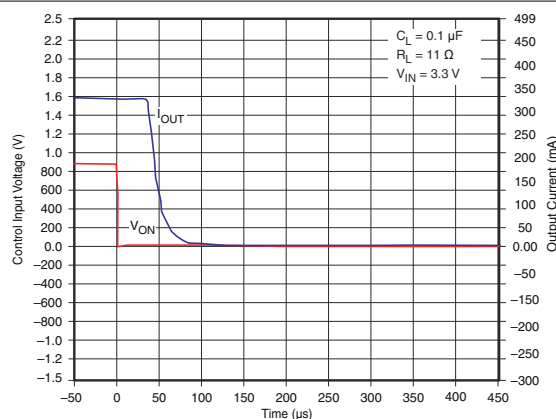

**Figure 7-26.  $t_{OFF}$  Response**

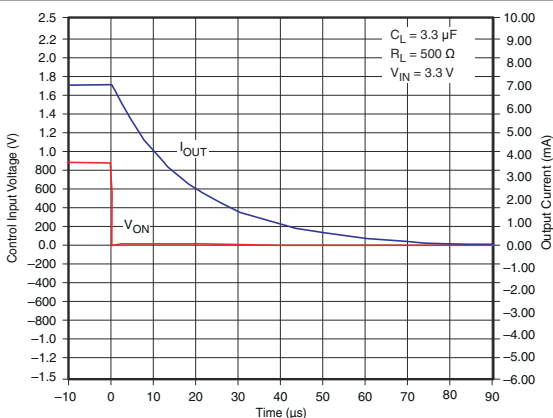


**Figure 7-27.  $t_{OFF}$  Response**

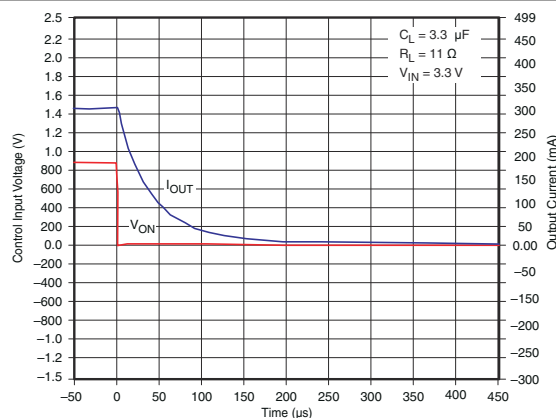


**Figure 7-28.  $t_{OFF}$  Response**

**TPS22901, TPS22902, TPS22902B**


SLVS803E – NOVEMBER 2008 – REVISED SEPTEMBER 2020

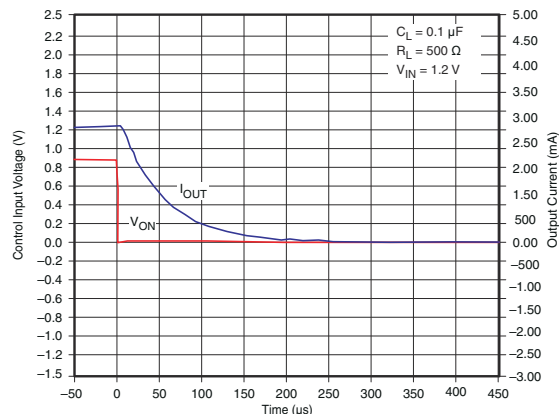


**Figure 7-29.  $t_{OFF}$  Response**

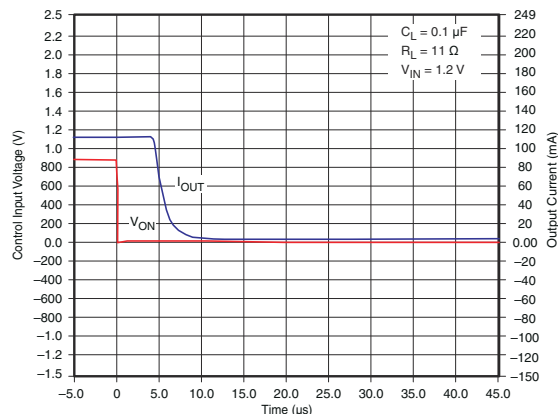

**Figure 7-30.  $t_{OFF}$  Response**

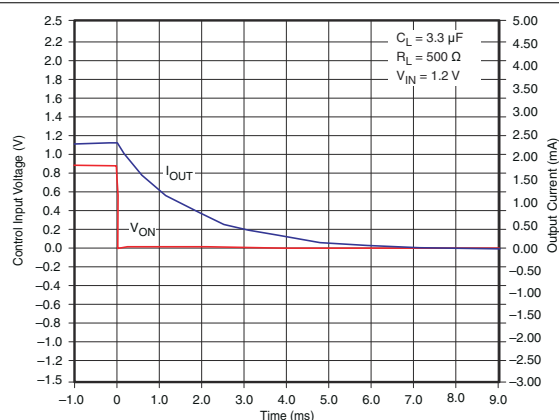


**Figure 7-31.  $t_{OFF}$  Response**

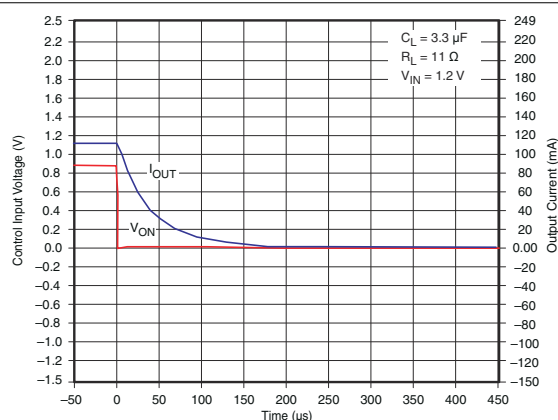


**Figure 7-32.  $t_{OFF}$  Response**


**7.12.2.6 TPS22902**

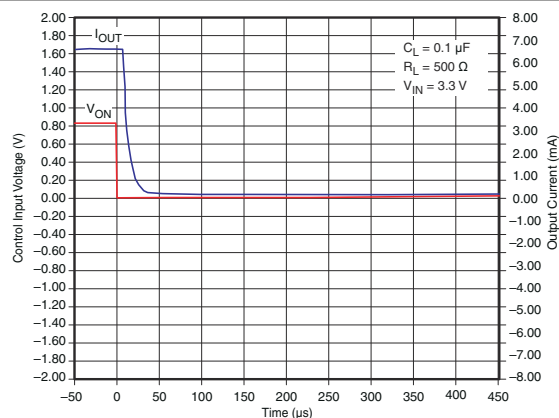


**Figure 7-33.  $t_{OFF}$  Response**

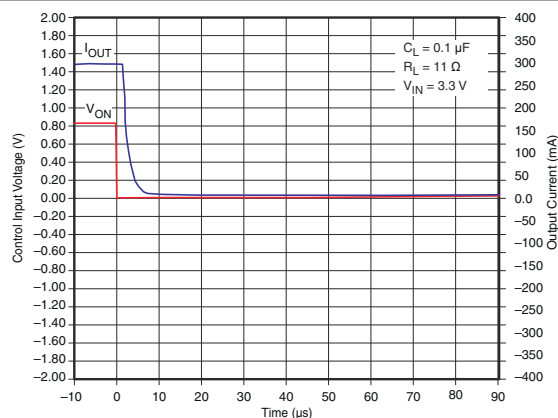


**Figure 7-34.  $t_{OFF}$  Response**

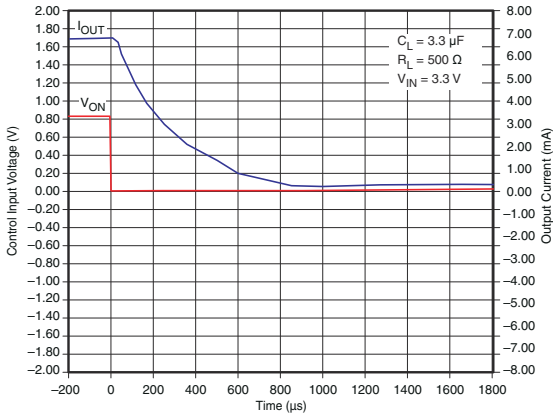


**Figure 7-35.  $t_{OFF}$  Response**

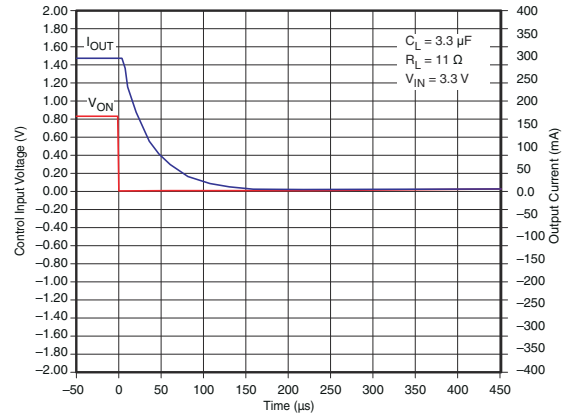


**Figure 7-36.  $t_{OFF}$  Response**

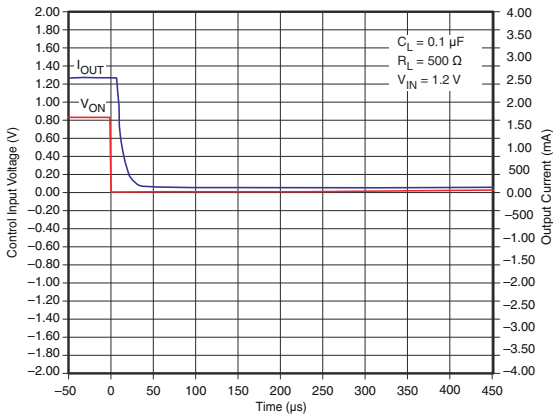


**Figure 7-37.  $t_{OFF}$  Response**

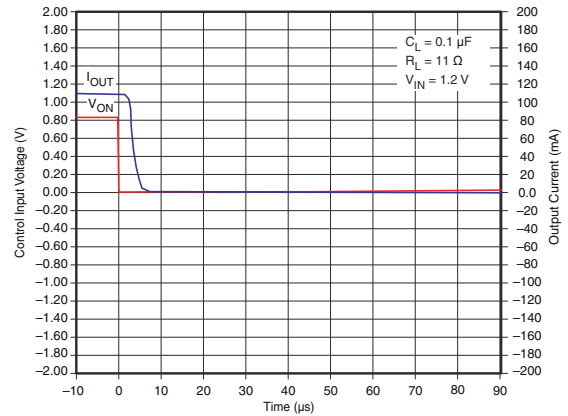

**Figure 7-38.  $t_{OFF}$  Response**

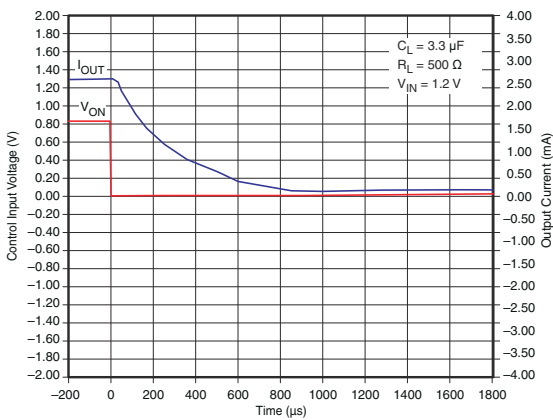

**Figure 7-39.  $t_{OFF}$  Response**

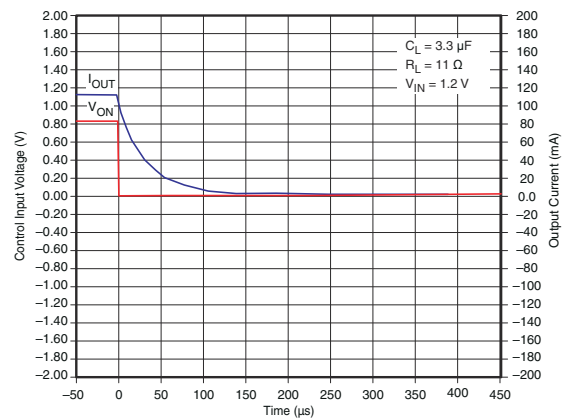

**Figure 7-40.  $t_{OFF}$  Response**

### 7.12.2.7 TPS22902B

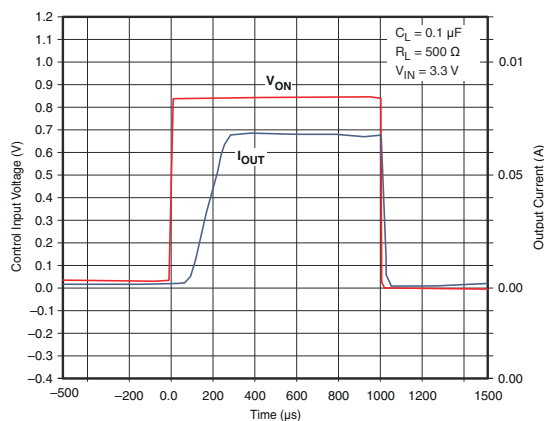


Figure 7-41.  $t_{ON}$  Response

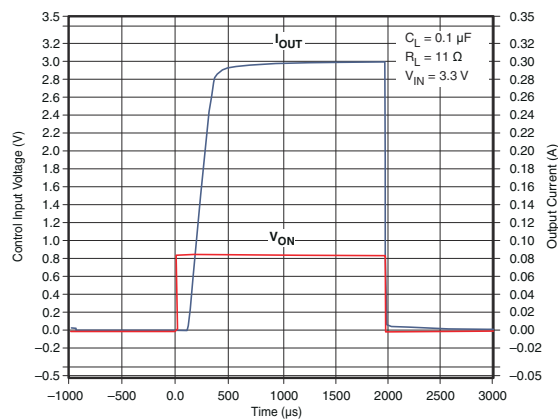


Figure 7-42.  $t_{ON}$  Response

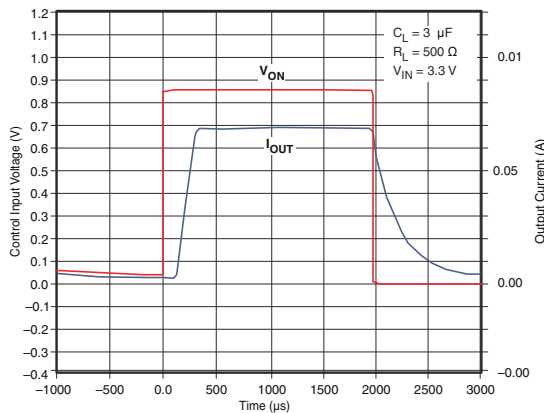


Figure 7-43.  $t_{ON}$  Response

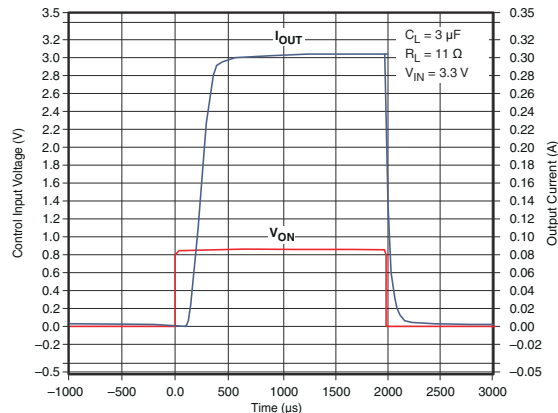


Figure 7-44.  $t_{ON}$  Response

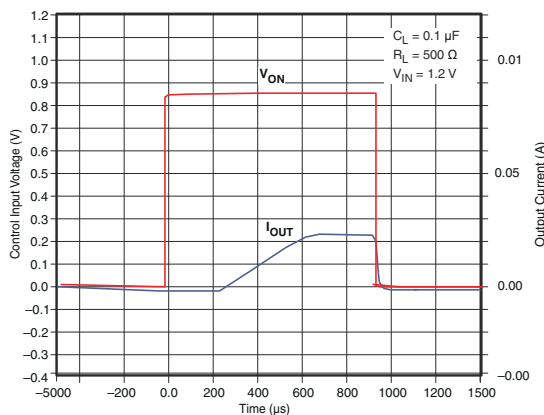


Figure 7-45.  $t_{ON}$  Response



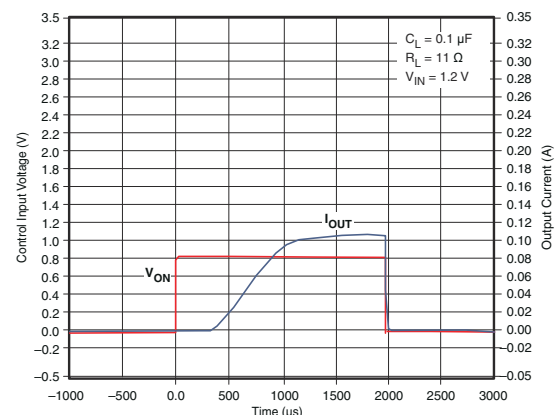


Figure 7-46.  $t_{ON}$  Response




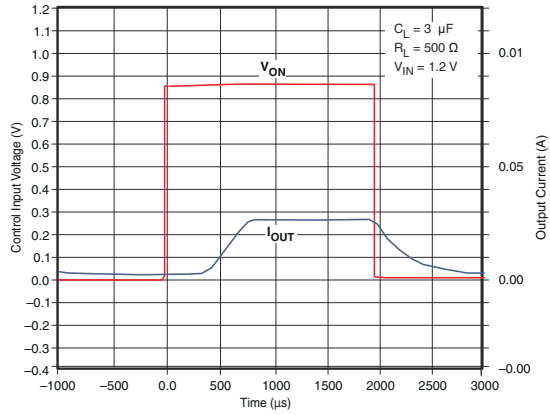


**Figure 7-47.  $t_{ON}$  Response**

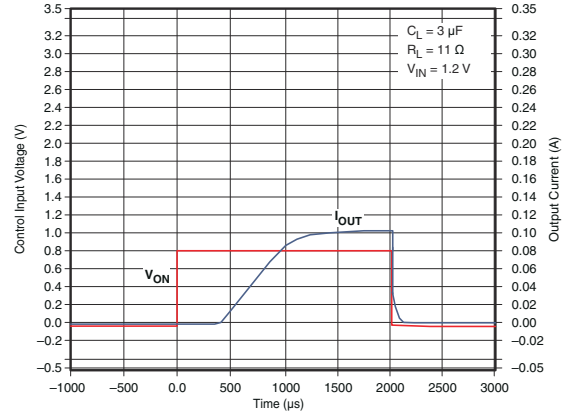


**Figure 7-48.  $t_{ON}$  Response**

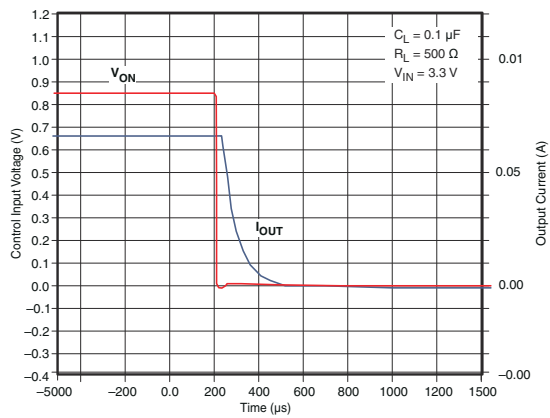


**Figure 7-49.  $t_{OFF}$  Response**

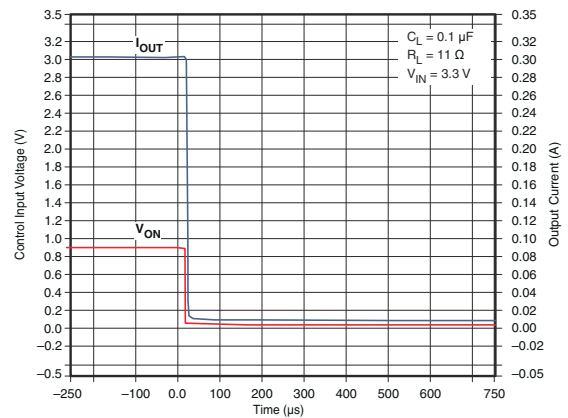

**Figure 7-50.  $t_{OFF}$  Response**

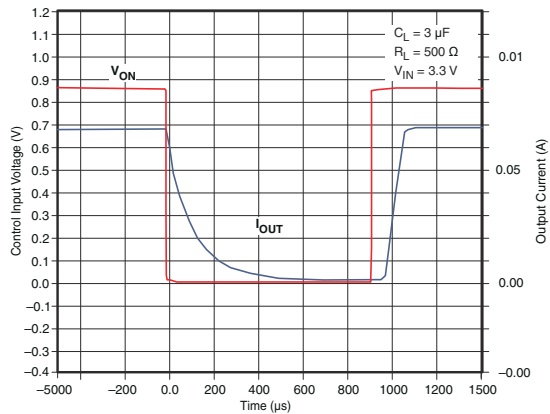

**Figure 7-51.  $t_{OFF}$  Response**

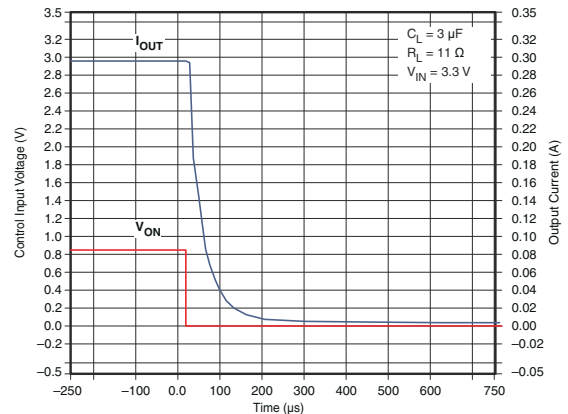

**Figure 7-52.  $t_{OFF}$  Response**

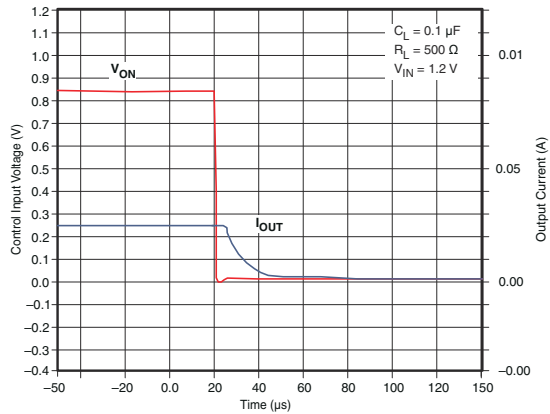


Figure 7-53.  $t_{OFF}$  Response

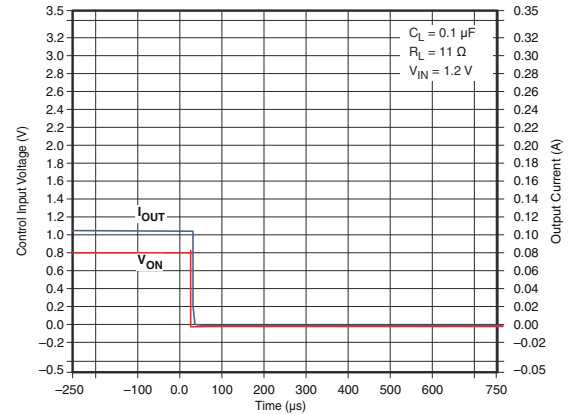


Figure 7-54.  $t_{OFF}$  Response

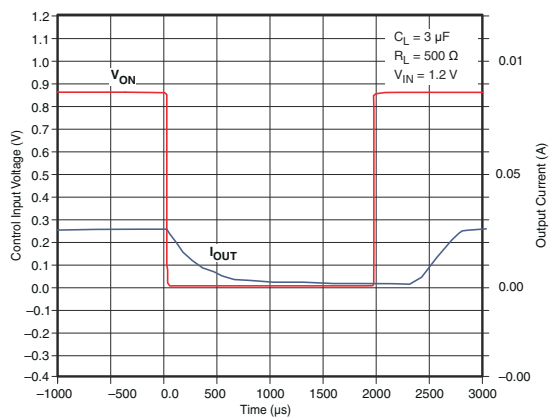


Figure 7-55.  $t_{OFF}$  Response


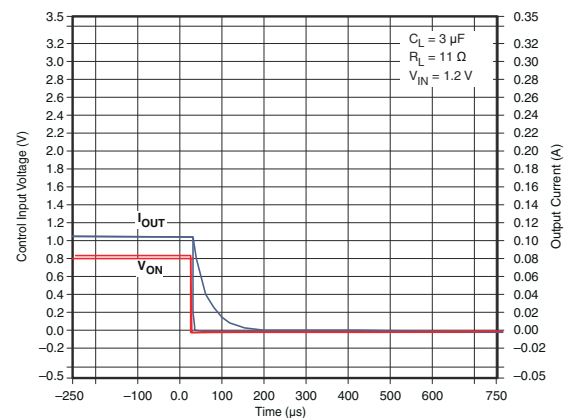


Figure 7-56.  $t_{OFF}$  Response

## 8 Parameter Measurement Information

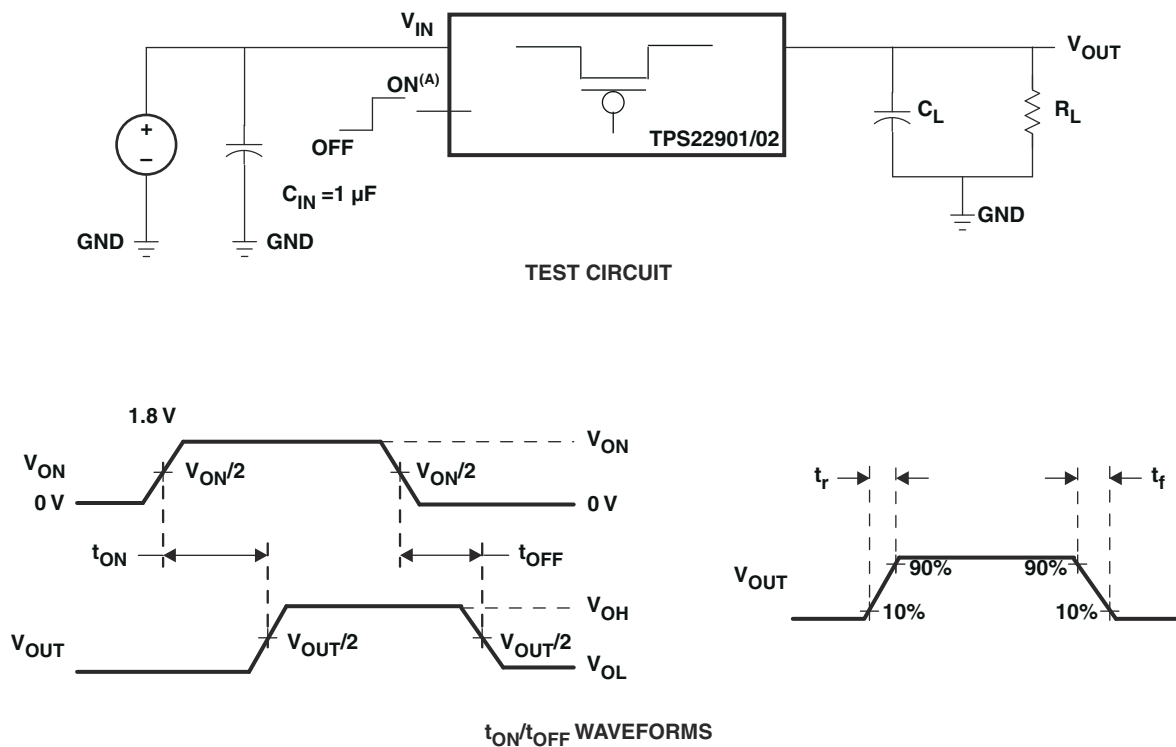

A.  $t_{rise}$  and  $t_{fall}$  of the control signal is 100 ns.


**Figure 8-1. Test Circuit and  $t_{ON}/t_{OFF}$  Waveforms**

## 9 Detailed Description

### 9.1 Overview

The TPS2290x and TPS22902B is a single channel, 500-mA load switch in a small, space-saving DSBGA-4 package. These devices implement a P-channel MOSFET to provide a low ON-resistance for a low voltage drop across the device. A controlled rise time is used in applications to limit the inrush current.

### 9.2 Functional Block Diagram

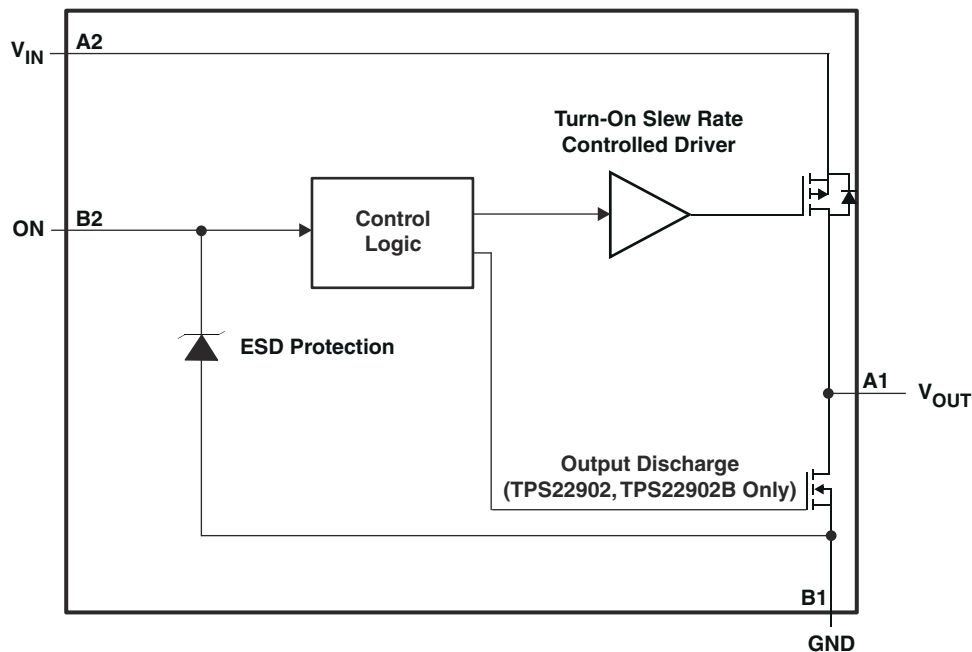

### 9.3 Feature Description

#### 9.3.1 ON/OFF Control

The ON pin controls the state of the switch. Activating ON continuously holds the switch in the on state. ON is active-high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold, and it can be used with any microcontroller with 1.2 V, 1.8 V, 2.5 V or 3.3 V GPIOs.

#### 9.3.2 Quick Output Discharge

The TPS2290x and TPS22902B includes the Quick Output Discharge (QOD) feature. When the switch is disabled, a discharge resistance with a typical value of 88  $\Omega$  is connected between the output and ground. This resistance pulls down the output and prevents it from floating when the device is disabled.

### 9.4 Device Functional Modes

Table 9-1 lists the VOUT pin connections for a particular device as determined by the ON pin.

**Table 9-1. VOUT Function Table**

| ON (Control Input) | TPS22901 | TPS22902/2B |
|--------------------|----------|-------------|
| L                  | Open     | GND         |
| H                  | VIN      | VIN         |

## 10 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information


#### 10.1.1 Input Capacitor (Optional)

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor, a capacitor needs to be placed between  $V_{IN}$  and GND. A 1- $\mu$ F ceramic capacitor,  $C_{IN}$ , placed close to the pins is usually sufficient. Higher values of  $C_{IN}$  can be used to further reduce the voltage drop during high current application. When switching heavy loads, TI recommends using an input capacitor about 10 times higher than the output capacitor in order to avoid excessive voltage drop.

#### 10.1.2 Output Capacitor (Optional)

Because of the integral body diode in the PMOS switch, a  $C_{IN}$  greater than  $C_L$  is highly recommended. A  $C_L$  greater than  $C_{IN}$  can cause  $V_{OUT}$  to exceed  $V_{IN}$  when the system supply is removed. This could result in current flow through the body diode from  $V_{OUT}$  to  $V_{IN}$ .

### 10.2 Typical Application

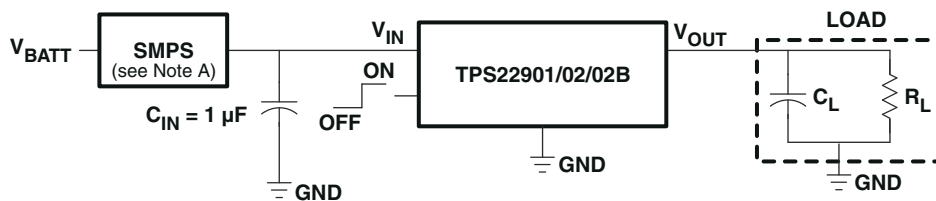

A. Switched-mode power supply

**Figure 10-1. Typical Application Schematic**

#### 10.2.1 Design Requirements

**Table 10-1. Design Parameters**

| DESIGN PARAMETER       | EXAMPLE VALUE |
|------------------------|---------------|
| $V_{IN}$               | 1.8 V         |
| $C_L$                  | 4.7 $\mu$ F   |
| Load current           | 500 mA        |
| Ambient Temperature    | 25 °C         |
| Maximum inrush current | 200 mA        |

## 10.2.2 Detailed Design Procedure

### 10.2.2.1 Managing Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to the set value (1.8 V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using the following equation:

$$I_{\text{INRUSH}} = C_L \times \frac{dV_{\text{OUT}}}{dt} \quad (1)$$

where:

- $C_L$  = Output capacitance
- $dV_{\text{OUT}}$  = Output voltage
- $dt$  = Rise time

The TPS2290x and TPS22902B offers a controlled rise time for minimizing inrush current. This device can be selected based upon the minimum acceptable rise time which can be calculated using the design requirements and the inrush current equation. An output capacitance of 4.7  $\mu\text{F}$  will be used since the amount of inrush current increases with output capacitance:

$$\begin{aligned} 200 \text{ mA} &= 4.7 \mu\text{F} \times 1.8 \text{ V} / dt \\ dt &= 42.3 \mu\text{s} \end{aligned} \quad (2)$$

To ensure an inrush current of less than 200 mA, a device with a rise time greater than 42.3  $\mu\text{s}$  must be used. The TPS22902B has a typical rise time of 220  $\mu\text{s}$  at 1.8 V which meets the above design requirements. The TPS22901/2 has a faster rise time of 40  $\mu\text{s}$  at 1.8 V, and this would result in an inrush current larger than desired.

### 10.2.2.2 VIN to VOUT Voltage Drop

The voltage drop from VIN to VOUT is determined by the ON-resistance of the device and the load current.  $R_{\text{ON}}$  can be found in [Section 7.5](#) and is dependent on temperature. When the value of  $R_{\text{ON}}$  is found, the following equation can be used to calculate the voltage drop across the device:

$$\Delta V = I_{\text{LOAD}} \times R_{\text{ON}} \quad (3)$$

where:

- $\Delta V$  = Voltage drop across the device
- $I_{\text{LOAD}}$  = Load current
- $R_{\text{ON}}$  = ON-resistance of the device


At  $V_{\text{IN}} = 1.8 \text{ V}$ , the TPS22901/2/2B has an  $R_{\text{ON}}$  value of 109 m $\Omega$ . Using this value and the defined load current, the above equation can be evaluated:

$$\begin{aligned} \Delta V &= 500 \text{ mA} \times 109 \text{ m}\Omega \\ \Delta V &= 54.5 \text{ mV} \end{aligned} \quad (4)$$

Therefore, the voltage drop across the device will be 54.5 mV.

### 10.2.3 Application Curve

Figure 10-2 shows the expected voltage drop across the device for different load currents and input voltages.

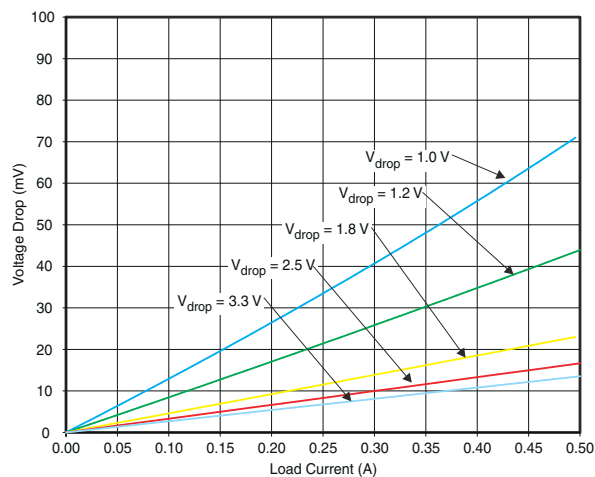

**Figure 10-2. Voltage Drop vs Load Current**

## 11 Power Supply Recommendations

The device is designed to operate with a  $V_{IN}$  range of 1 V to 3.6 V. This supply must be well regulated and placed as close to the device terminals as possible. It must also be able to withstand all transient and load currents, using a recommended input capacitance of 1  $\mu\text{F}$  if necessary. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10  $\mu\text{F}$  may be sufficient.

## 12 Layout

### 12.1 Layout Guidelines

For best performance,  $V_{IN}$ ,  $V_{OUT}$ , and GND traces should be as short and wide as possible to help minimize the parasitic electrical effects. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation.


For higher reliability, the maximum IC junction temperature,  $T_{J(max)}$ , should be restricted to 125°C under normal operating conditions. Junction temperature is directly proportional to power dissipation in the device and the two are related by

$$T_J = T_A + \theta_{JA} \times P_D \quad (5)$$

where:

- $T_J$  = Junction temperature of the device
- $T_A$  = Ambient temperature
- $P_D$  = Power dissipation inside the device
- $\theta_{JA}$  = Junction to ambient thermal resistance. See Thermal Information section of the datasheet. This parameter is highly dependent on board layout.

### 12.2 Layout Example

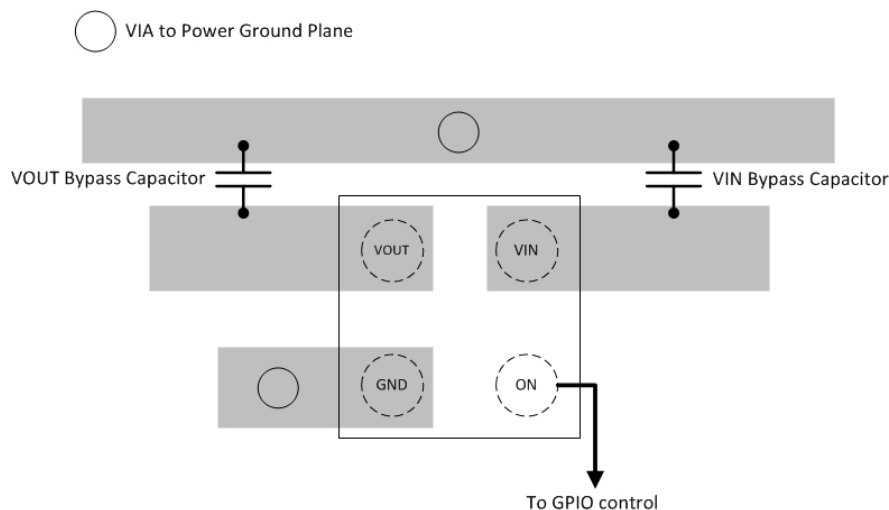

**Figure 12-1. Layout Example Schematic**



## 13 Device and Documentation Support

### 13.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 13-1. Related Links**

| PARTS     | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|-----------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| TPS22901  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS22902  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS22902B | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 13.2 Trademarks

All other trademarks are the property of their respective owners.

### 13.3 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 13.4 Glossary

**TI Glossary** This glossary lists and explains terms, acronyms, and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS22901YFPR     | ACTIVE        | DSBGA        | YFP                | 4    | 3000           | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 85    | 3P<br>(3, 5)            | <a href="#">Samples</a> |
| TPS22902BYFPR    | ACTIVE        | DSBGA        | YFP                | 4    | 3000           | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 85    | 3S<br>3                 | <a href="#">Samples</a> |
| TPS22902YFPR     | ACTIVE        | DSBGA        | YFP                | 4    | 3000           | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 85    | 3R                      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

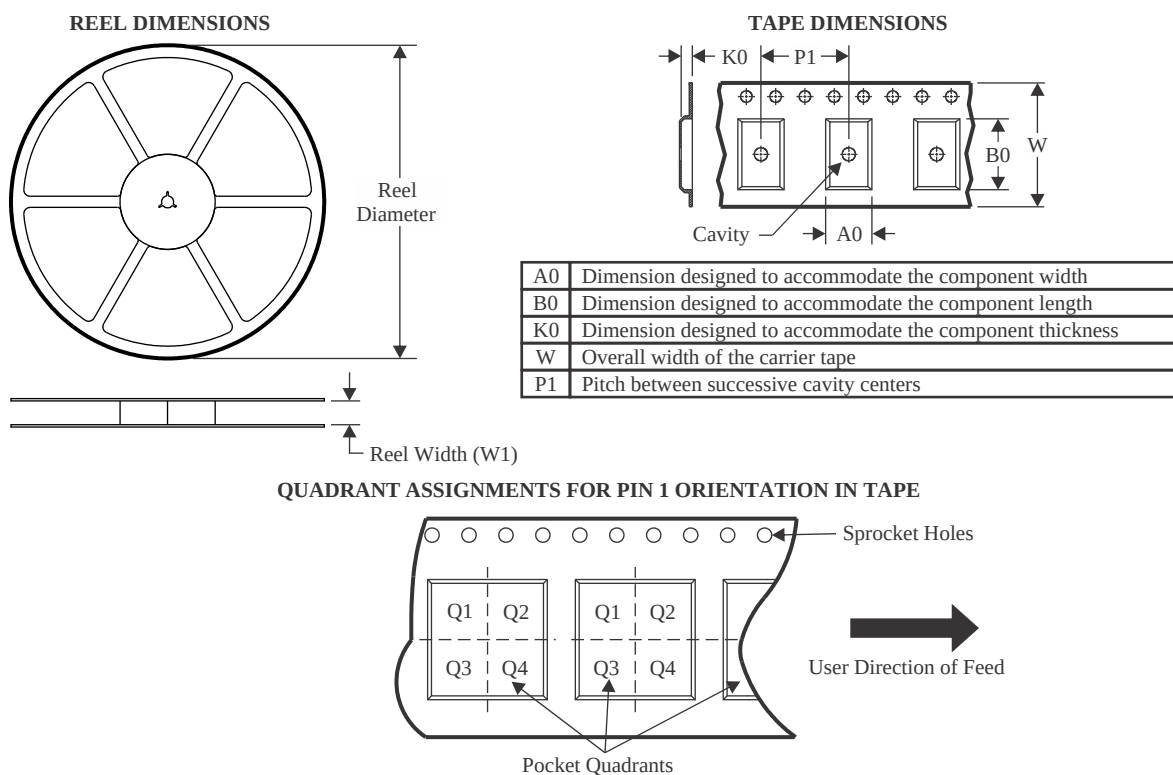

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS22901YFPR  | DSBGA        | YFP             | 4    | 3000 | 178.0              | 9.2                | 0.89    | 0.89    | 0.58    | 4.0     | 8.0    | Q1            |
| TPS22902BYFPR | DSBGA        | YFP             | 4    | 3000 | 180.0              | 8.4                | 0.89    | 0.89    | 0.58    | 4.0     | 8.0    | Q1            |
| TPS22902YFPR  | DSBGA        | YFP             | 4    | 3000 | 180.0              | 8.4                | 0.89    | 0.89    | 0.58    | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

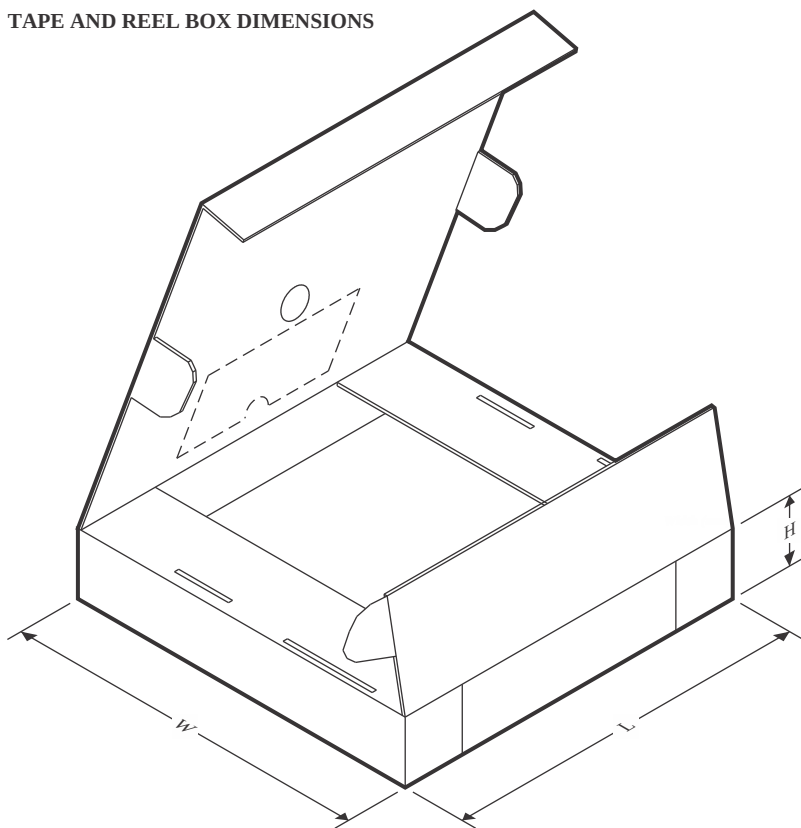

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS22901YFPR  | DSBGA        | YFP             | 4    | 3000 | 220.0       | 220.0      | 35.0        |
| TPS22902BYFPR | DSBGA        | YFP             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS22902YFPR  | DSBGA        | YFP             | 4    | 3000 | 182.0       | 182.0      | 20.0        |




YFP0004



# PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

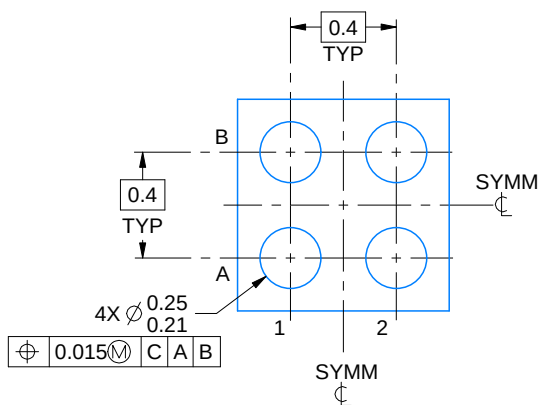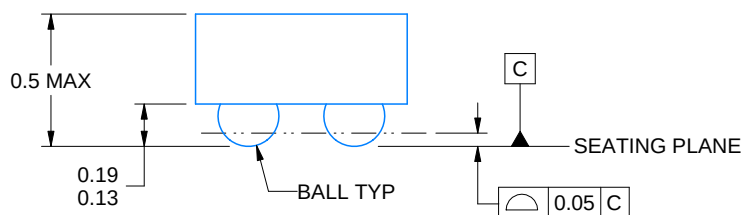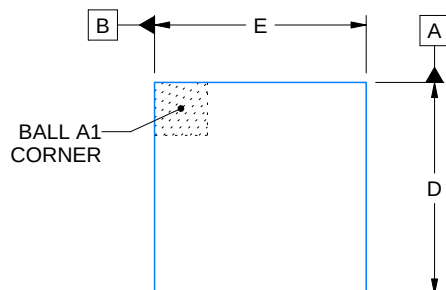


D: Max = 0.79 mm, Min = 0.73 mm

E: Max = 0.79 mm, Min = 0.73 mm


4223507/A 01/2017

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

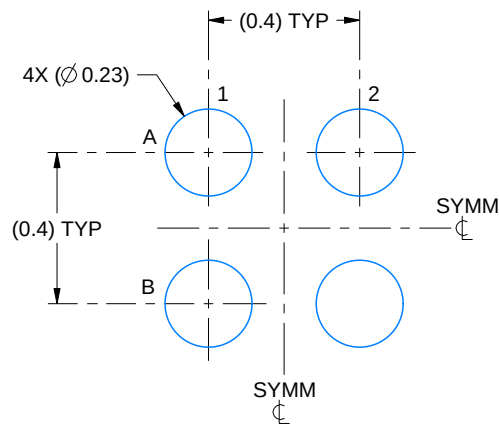

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:50X

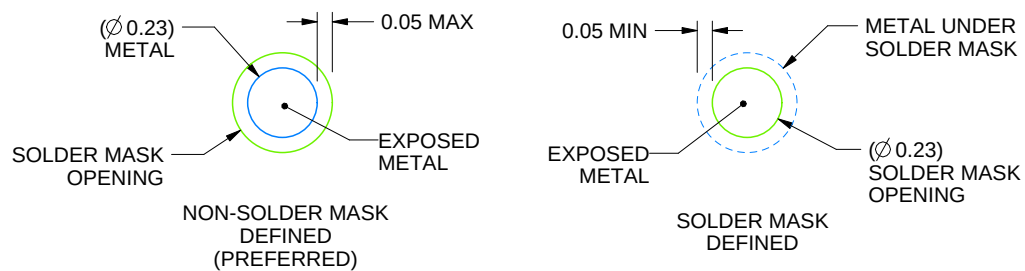


SOLDER MASK DETAILS  
NOT TO SCALE

4223507/A 01/2017

NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

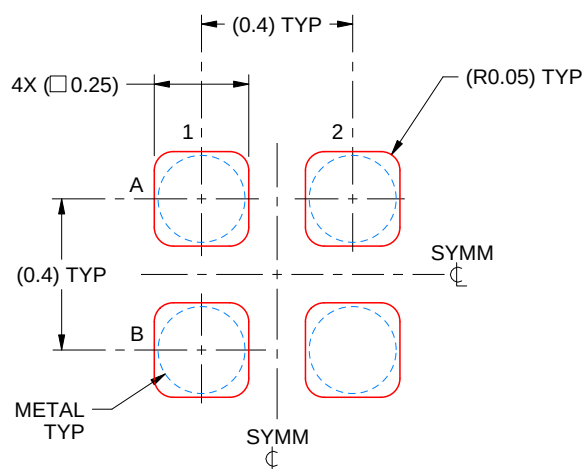

SOLDER PASTE EXAMPLE  
 BASED ON 0.1 mm THICK STENCIL  
 SCALE:50X

4223507/A 01/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated