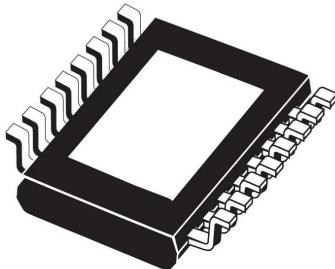


## Single channel high-side driver with current sense analog feedback for automotive applications



**PowerSSO-16**

### Features

Max. transient supply voltage	V <sub>CC</sub>	36 V
Operating voltage range	V <sub>CC</sub>	4 to 28 V
Typ. on-state resistance (per channel)	R <sub>ON</sub>	12 mΩ
Current limitation (typ.)	I <sub>LIMH</sub>	63 A
Standby current (max.)	I <sub>STBY</sub>	0.5 μA



- AEC-Q100 qualified
- Extreme low voltage operation for deep cold cranking applications (compliant with LV124, revision 2013)
- General
  - Single channel smart high-side driver with current sense analog feedback
  - Very low standby current
  - Compatible with 3 V and 5 V CMOS outputs
- Current sense diagnostic functions
  - Multiplexed analog feedback of load current with high precision proportional current mirror
  - Overload and short to ground (power limitation) indication
  - Thermal shutdown indication
  - OFF-state open-load detection (with external pull-up)
  - Output short to V<sub>CC</sub> detection
  - Sense enable/disable
- Protections
  - Undervoltage shutdown
  - Overvoltage clamp
  - Load current limitation
  - Self limiting of fast thermal transients
  - Configurable latch-off on overtemperature or power limitation with dedicated fault reset pin
  - Loss of ground and loss of V<sub>CC</sub>
  - Reverse battery through self turn-on
  - Electrostatic discharge protection

### Applications

- Automotive resistive, inductive and capacitive loads
- Protected supply for ADAS systems: radars and sensors

### Description

The VN9012AJ is a single channel high-side driver manufactured using ST proprietary VIPower M0-9 technology and housed in a PowerSSO-16 package. The device is designed to drive 12 V automotive grounded loads through a 3 V and 5 V CMOS-compatible interface, providing protection and diagnostics.

The device integrates advanced protective functions such as load current limitation, overload active management by power limitation and overtemperature shutdown with configurable latch-off.

A FaultRST pin unlatches the output in case of fault or disables the latch-off functionality.

A dedicated multifunction multiplexed analog output pin delivers sophisticated diagnostic functions including high precision proportional load current sense, supply voltage feedback and chip temperature sense, in addition to the detection of overload and short circuit to ground, short to  $V_{CC}$  and OFF-state open-load.

## 1 Block diagram and pin description

Figure 1. Block diagram

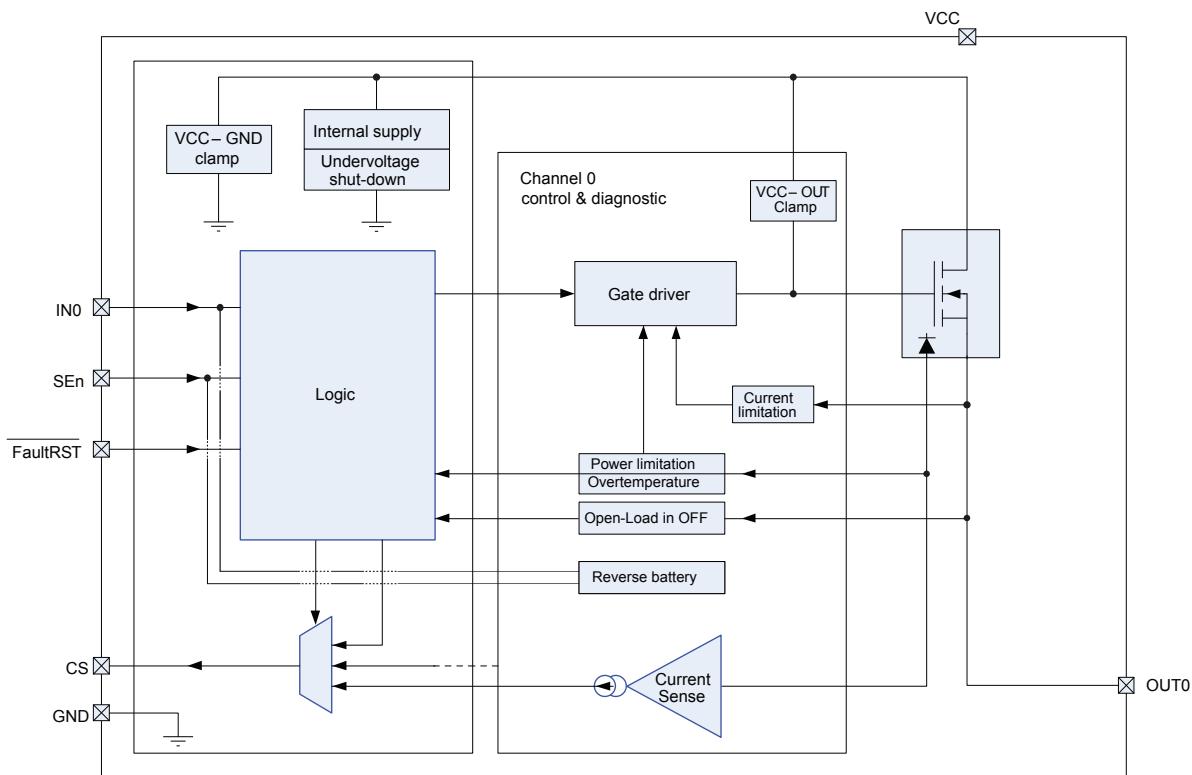
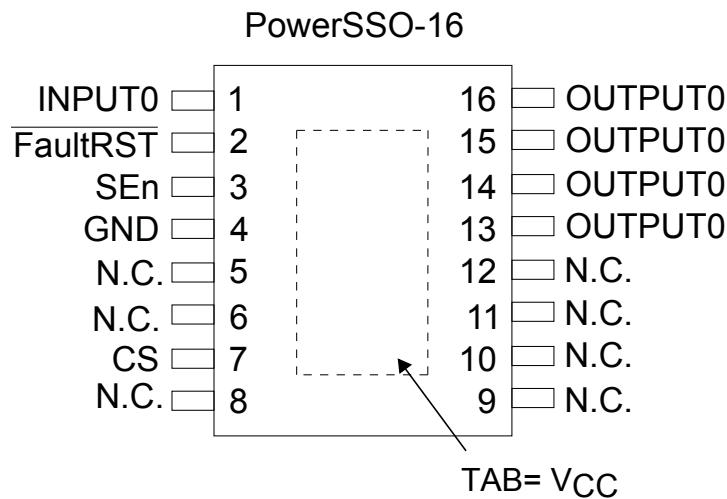


Table 1. Pin functions

Name	Function
V <sub>CC</sub>	Battery connection.
OUTPUT <sub>0</sub>	Power outputs.
GND	Ground connection. Must be reverse battery protected by an external diode / resistor network.
INPUT <sub>0</sub>	Voltage controlled input pin with hysteresis, compatible with 3 V and 5 V CMOS outputs. It controls output switch state.
CS	Multiplexed analog sense output pin; it delivers a current proportional to the selected load current.
SEn	Active high compatible with 3 V and 5 V CMOS outputs pin; it enables the CS diagnostic pin.
FaultRST	Active low compatible with 3 V and 5 V CMOS outputs pin; it unlatches the output in case of fault; If kept low, sets the outputs in auto-restart mode.


**Figure 2.** Configuration diagram (top view)**Table 2.** Suggested connections for unused and not connected pins

Connection/pin	CS	NC	Output	Input	SEn, $\overline{\text{FaultRST}}$
Floating	Not allowed	X <sup>(1)</sup>	X	X	X
To ground	Through 1 k $\Omega$ resistor	X	Not allowed	Through 15 k $\Omega$ resistor	Through 15 k $\Omega$ resistor

1. X: do not care.

## 2 Electrical specification

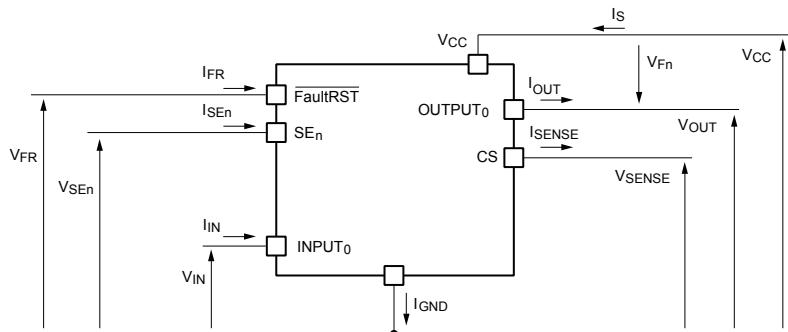Figure 3. Current and voltage conventions



Note:  $V_{Fn} = V_{OUTn} - V_{CC}$  during reverse battery condition.

### 2.1 Absolute maximum ratings

Stressing the device above the rating listed in Table 3. Absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to the conditions in the table below for extended periods may affect the device reliability.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_{CC}$	DC supply voltage	36	V
$-V_{CC}$	Reverse DC supply voltage	0.3	V
$V_{CCJS}$	Maximum jump start voltage for single pulse short circuit protection	28	V
$-I_{GND}$	DC reverse ground pin current	200	mA
$I_{OUT}$	OUTPUT <sub>0</sub> DC output current	Internally limited	A
$-I_{OUT}$	Reverse DC output current	13	A
$I_{IN}$	INPUT <sub>0</sub> DC input current	-1 to 10	mA
$I_{SEN}$	SEn DC input current	-1 to 3	mA
$I_{FR}$	FaultRST DC input current	-1 to 10	mA
$I_{SENSE}$	CS pin DC output current ( $V_{GND} = V_{CC}$ and $V_{SENSE} < 0$ V)	10	mA
	CS pin DC output current in reverse ( $V_{CC} < 0$ V)	-20	
$E_{MAX}$	Maximum switching energy single pulse ( $T_{Jstart} = 150$ °C)	25	mJ
$V_{ESD}$	INPUT <sub>0</sub>	2000	V
	CS	2000	
	SEn, FaultRST	2000	
	OUTPUT <sub>0</sub>	4000	
	$V_{CC}$	4000	
	Charge device model (CDM-AEC-Q100-011)	750	
$T_J$	Operating junction temperature range	-40 to 150	°C
$T_{stg}$	Storage temperature range	-55 to 150	°C

## 2.2 Thermal data

**Table 4. Thermal data**

Symbol	Parameter	Typ. value	Unit
$R_{thJB}$	Thermal resistance, junction-to-board (JEDEC JESD 51-8) <sup>(1)</sup>	6.9	°C/W
$R_{thJA}$	Thermal resistance, junction-to-ambient (JEDEC JESD 51-2) <sup>(2)</sup>	53.3	°C/W
	Thermal resistance, junction-to-ambient (JEDEC JESD 51-2) <sup>(1)</sup>	21.8	

1. Device mounted on four-layers 2s2p PCB.
2. Device mounted on two-layers 2s0p PCB with 2 cm<sup>2</sup> heatsink copper trace.

## 2.3 Main electrical characteristics

7 V <  $V_{CC}$  < 28 V; -40 °C <  $T_J$  < 150 °C, unless otherwise specified.

All typical values refer to  $V_{CC} = 13$  V;  $T_J = 25$  °C, unless otherwise specified.

**Table 5. Power section**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{CC}$	Operating supply voltage		4	13	28	V
$V_{USD}$	Undervoltage shutdown			2.1	2.7	V
$V_{USDReset}$	Undervoltage shutdown reset				4.5	V
$V_{USDhyst}$	Undervoltage shutdown hysteresis			0.15		V
$R_{ON}$	On-state resistance	$I_{OUT} = 4.75$ A; $T_J = 25$ °C		12		mΩ
		$I_{OUT} = 4.75$ A; $T_J = 150$ °C			26.4	
		$I_{OUT} = 4.75$ A; $V_{CC} = 4$ V; $T_J = 25$ °C			20.4	
		$I_{OUT} = 1$ A; $V_{CC} = 2.7$ V; $V_{CC}$ decreasing			72	
$R_{ON\_Rev}$	$R_{DSon}$ in reverse battery condition	$V_{CC} = -13$ V; $I_{OUT} = -4.75$ A; $T_J = 25$ °C		12		mΩ
$V_{clamp}$	Clamp voltage	$I_S = 20$ mA; 25 °C < $T_J$ < 150 °C	36	38	45	V
		$I_S = 20$ mA; $T_J = -40$ °C	36			
$I_{STBY}$	Supply current in standby at $V_{CC} = 13$ V <sup>(1)</sup>	$V_{CC} = 13$ V; $T_J = 25$ °C; $V_{IN} = V_{OUT} = V_{FR} = V_{SEn} = 0$ V;			0.5	μA
		$V_{CC} = 13$ V; $T_J = 85$ °C <sup>(2)</sup> $V_{IN} = V_{OUT} = V_{FR} = V_{SEn} = 0$ V;			0.5	
		$V_{CC} = 13$ V; $T_J = 125$ °C $V_{IN} = V_{OUT} = V_{FR} = V_{SEn} = 0$ V;			3	
$t_{D\_STBY}$	Standby mode blanking time	$V_{CC} = 13$ V; $V_{IN} = V_{OUT} = V_{FR} = 0$ V; $V_{SEn} = 5$ V to 0 V	60	260	550	μs
$I_{S(ON)}$	Supply current at $V_{CC} = 13$ V	$V_{CC} = 13$ V; $V_{SEn} = V_{FR} = 0$ V; $V_{IN0} = 5$ V; $I_{OUT0} = 0$ A		1.6	2.5	mA
$I_{GND(ON)}$	Control stage current consumption in ON-state. All channels active.	$V_{CC} = 13$ V; $V_{SEn} = 5$ V; $V_{FR} = 0$ V; $V_{IN0} = 5$ V; $I_{OUT0} = 4.75$ A			3	mA

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{L(\text{off})}$	Off-state output current at $V_{CC} = 13 \text{ V}^{(1)}$	$V_{IN} = V_{OUT} = 0 \text{ V}; V_{CC} = 13 \text{ V}; T_J = 25 \text{ }^\circ\text{C}$	0	0.01	0.5	$\mu\text{A}$
		$V_{IN} = V_{OUT} = 0 \text{ V}; V_{CC} = 13 \text{ V}; T_J = 125 \text{ }^\circ\text{C}$	0		3	
$V_F$	Output - $V_{CC}$ diode voltage at $T_J = 150 \text{ }^\circ\text{C}$	$I_{OUT} = -4.75 \text{ A}; T_J = 150 \text{ }^\circ\text{C}$			0.7	V

1. Power MOSFET leakage included.
2. Parameter specified by design, not tested in production.

**Table 6. Switching**

$V_{CC} = 13 \text{ V}; -40 \text{ }^\circ\text{C} < T_J < 150 \text{ }^\circ\text{C}$ , unless otherwise specified							
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
$t_{d(on)}^{(1)}$	Turn-on delay time at $T_J = 25 \text{ }^\circ\text{C}$	$R_L = 2.8 \Omega$	10	50	120	$\mu\text{s}$	
$t_{d(off)}^{(1)}$	Turn-off delay time at $T_J = 25 \text{ }^\circ\text{C}$		10	25	100		
$(dV_{OUT}/dt)_{on}^{(1)}$	Turn-on voltage slope at $T_J = 25 \text{ }^\circ\text{C}$	$R_L = 2.8 \Omega$	0.2	0.45	0.7	$\text{V}/\mu\text{s}$	
$(dV_{OUT}/dt)_{off}^{(1)}$	Turn-off voltage slope at $T_J = 25 \text{ }^\circ\text{C}$	$R_L = 2.8 \Omega$	0.2	0.5	0.7		
$W_{ON}$	Switching energy losses at turn-on ( $t_{won}$ )	$R_L = 2.8 \Omega$		0.5	1.9 <sup>(2)</sup>	$\text{mJ}$	
$W_{OFF}$	Switching energy losses at turn-off ( $t_{woff}$ )	$R_L = 2.8 \Omega$		0.4	1 <sup>(2)</sup>		
$t_{SKew}^{(1)}$	Differential Pulse skew ( $t_{PHL} - t_{PLH}$ )	$R_L = 2.8 \Omega$	-77	-27	23	$\mu\text{s}$	

1. See Figure 4. Switching time and pulse skew.
2. Parameter specified by design and evaluated by characterization, not tested in production.

**Table 7. Logic inputs**

$7 \text{ V} < V_{CC} < 28 \text{ V}; -40 \text{ }^\circ\text{C} < T_J < 150 \text{ }^\circ\text{C}$							
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
INPUT <sub>0</sub> characteristics							
$V_{IL}$	Input low level voltage				0.9	V	
$I_{IL}$	Low level input current	$V_{IN} = 0.9 \text{ V}$	1			$\mu\text{A}$	
$V_{IH}$	Input high level voltage		2.1			V	
$I_{IH}$	High level input current	$V_{IN} = 2.1 \text{ V}$			10	$\mu\text{A}$	
$V_{I(hyst)}$	Input hysteresis voltage		0.2			V	
$V_{ICL}$	Input clamp voltage	$I_{IN} = 1 \text{ mA}$	6		8.5	V	
		$I_{IN} = -1 \text{ mA}$			-0.7		
FaultRST characteristics							
$V_{FRL}$	Input low level voltage				0.9	V	
$I_{FRL}$	Low level input current	$V_{IN} = 0.9 \text{ V}$	1			$\mu\text{A}$	
$V_{FRH}$	Input high level voltage		2.1			V	
$I_{FRH}$	High level input current	$V_{IN} = 2.1 \text{ V}$			10	$\mu\text{A}$	
$V_{FR(hyst)}$	Input hysteresis voltage		0.2			V	
$V_{FRCL}$	Input clamp voltage	$I_{IN} = 1 \text{ mA}$	6		8.5	V	

7 V < V <sub>CC</sub> < 28 V; -40 °C < T <sub>J</sub> < 150 °C						
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V <sub>FRCL</sub>	Input clamp voltage	I <sub>IN</sub> = -1 mA		-0.7		V
SEn characteristics (7 V < V <sub>CC</sub> < 18 V)						
V <sub>SEnL</sub>	Input low level voltage				0.9	V
I <sub>SEnL</sub>	Low level input current	V <sub>IN</sub> = 0.9 V	1			µA
V <sub>SEnH</sub>	Input high level voltage		2.1			V
I <sub>SEnH</sub>	High level input current	V <sub>IN</sub> = 2.1 V			10	µA
V <sub>SEn(hyst)</sub>	Input hysteresis voltage		0.2			V
V <sub>SEnCL</sub>	Input clamp voltage	I <sub>SEn</sub> = 1 mA	9		12	V
		I <sub>SEn</sub> = -1 mA		-0.7		

**Table 8. Protections**

7 V < V <sub>CC</sub> < 18 V; -40 °C < T <sub>J</sub> < 150 °C							
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
I <sub>LIMH<sup>(1)</sup></sub>	DC short-circuit current	V <sub>CC</sub> = 16 V; T <sub>J</sub> = -40 °C	-15%	70	15%	A	
		V <sub>CC</sub> = 16 V; T <sub>J</sub> = 150 °C	-15%	53	15%		
I <sub>LIMH2<sup>(2)</sup></sub>		V <sub>CC</sub> = 19 V; T <sub>J</sub> = -40 °C	-15%	53	15%		
		V <sub>CC</sub> = 19 V; T <sub>J</sub> = 150 °C	-15%	40.5	15%		
I <sub>LIMH at 22 V</sub>		V <sub>CC</sub> = 22 V; T <sub>J</sub> = 25 °C		18			
T <sub>TSD</sub>	Shutdown temperature		150	175	210	°C	
	Shutdown temperature (V <sub>CC</sub> decreasing)	V <sub>CC</sub> = 2.7 V	140				
T <sub>RS</sub>	Thermal reset of fault diagnostic indication	V <sub>FR</sub> = 0 V; V <sub>SEn</sub> = 5 V	135			°C	
T <sub>HYST</sub>	Thermal hysteresis (T <sub>TSD</sub> - T <sub>RS</sub> ) <sup>(3)</sup>			7		°C	
ΔT <sub>J_SD</sub>	Dynamic temperature	V <sub>CC</sub> = 16 V		80		K	
		V <sub>CC</sub> = 19 V		55		K	
t <sub>LATCH_RST</sub>	Fault reset time for output unlatch <sup>(3)</sup>	V <sub>FR</sub> = 5 V to 0 V; V <sub>SEn</sub> = 5 V; V <sub>IN0</sub> = 5 V	3	10	20	µs	
t <sub>D_Restart</sub>	Latch-OFF delay time before automatic restart			50	75	ms	
V <sub>DEMAG</sub>	Turn-off output voltage clamp	I <sub>OUT</sub> = 1 A; L = 6 mH; T <sub>J</sub> = -40 °C	V <sub>CC</sub> - 36			V	
		I <sub>OUT</sub> = 1 A; L = 6 mH; T <sub>J</sub> = 25 °C to 150 °C	V <sub>CC</sub> - 36	V <sub>CC</sub> - 38	V <sub>CC</sub> - 45		

1. I<sub>LIMH</sub>, guaranteed between 7 V and 16 V, -40 °C < T<sub>J</sub> < 150 °C.

2. I<sub>LIMH2</sub>, guaranteed between 16 V and 19 V, -40 °C < T<sub>J</sub> < 150 °C.

3. Parameter guaranteed by design and characterization; not subject to production test.

**Table 9. Current sense**

7 V < V <sub>CC</sub> < 18 V; -40 °C < T <sub>J</sub> < 150 °C						
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V <sub>SENSE_CL</sub>	CS clamp voltage	V <sub>SEN</sub> = 0 V; I <sub>SENSE</sub> = 1 mA	-9	-8	-7	V
		V <sub>SEN</sub> = 0 V; I <sub>SENSE</sub> = -1 mA		7		
Current sense characteristics						
K <sub>LED</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 50 mA; V <sub>SENSE</sub> = 0.5 V; V <sub>SEN</sub> = 5 V	-35%	10400	+35%	
dK <sub>LED</sub> /K <sub>LED</sub> <sup>(1)</sup> <sup>(2)</sup>	Current sense ratio drift	I <sub>OUT</sub> = 50 mA; V <sub>SENSE</sub> = 0.5 V; V <sub>SEN</sub> = 5 V	-25		25	%
K <sub>0</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 0.25 A; V <sub>SENSE</sub> = 0.5 V; V <sub>SEN</sub> = 5 V	-20%	10400	20%	
dK <sub>0</sub> /K <sub>0</sub> <sup>(1)</sup> <sup>(2)</sup>	Current sense ratio drift	I <sub>OUT</sub> = 0.25 A; V <sub>SENSE</sub> = 0.5 V; V <sub>SEN</sub> = 5 V	-15		15	%
K <sub>1</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 0.95 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-15%	10400	15%	
dK <sub>1</sub> /K <sub>1</sub> <sup>(1)</sup> <sup>(2)</sup>	Current sense ratio drift	I <sub>OUT</sub> = 0.95 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-10		10	%
K <sub>2</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 4.75 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-7%	10400	7%	
dK <sub>2</sub> /K <sub>2</sub> <sup>(1)</sup> <sup>(2)</sup>	Current sense ratio drift	I <sub>OUT</sub> = 4.75 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-7		7	%
K <sub>3</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 14 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-5%	10400	5%	
dK <sub>3</sub> /K <sub>3</sub> <sup>(1)</sup> <sup>(2)</sup>	Current sense ratio drift	I <sub>OUT</sub> = 14 A; V <sub>SENSE</sub> = 3.5 V; V <sub>SEN</sub> = 5 V	-5		5	%
I <sub>SENSE0</sub>	Current sense leakage current	CS disabled: V <sub>SEN</sub> = 0 V	0		0.5	μA
		CS disabled: -1 V < V <sub>SENSE</sub> < 5 V <sup>(1)</sup>	-1		1	
		CS enabled: V <sub>SEN</sub> = 5 V; Channel ON; V <sub>IN0</sub> = 5 V; I <sub>OUT0</sub> = 0 A;	0		3	
		CS enabled: V <sub>SEN</sub> = 5 V; Channel OFF; V <sub>IN0</sub> = 0 V; I <sub>OUT0</sub> = 0 A	0		1	
V <sub>OUT_MSD</sub> <sup>(1)</sup>	Output voltage for CS shutdown	V <sub>SEN</sub> = 5 V; R <sub>SENSE</sub> = 2.7 kΩ; V <sub>IN0</sub> = 5 V; I <sub>OUT0</sub> = 4.75 A		5		V
V <sub>SENSE_SAT</sub>	CS saturation voltage	V <sub>CC</sub> = 7 V; R <sub>SENSE</sub> = 10 kΩ; V <sub>SEN</sub> = 5 V; V <sub>IN0</sub> = 5 V; I <sub>OUT0</sub> = 14 A; T <sub>J</sub> = -40 °C	4.8			V
I <sub>SENSE_SAT</sub> <sup>(1)</sup>	CS saturation current	V <sub>CC</sub> = 7 V; V <sub>SENSE</sub> = 3.5 V; V <sub>IN0</sub> = 5 V; V <sub>SEN</sub> = 5 V; T <sub>J</sub> = 150 °C	2			mA
I <sub>OUT_SAT</sub> <sup>(1)</sup>	Output saturation current	V <sub>CC</sub> = 7 V; V <sub>SENSE</sub> = 3.5 V; V <sub>IN0</sub> = 5 V; V <sub>SEN</sub> = 5 V; T <sub>J</sub> = 150 °C	29			A

7 V < V <sub>CC</sub> < 18 V; -40 °C < T <sub>J</sub> < 150 °C							
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
OFF-state diagnostic							
V <sub>OL</sub>	OFF-state open-load voltage detection threshold	V <sub>SEN</sub> = 5 V; Ch OFF; V <sub>IN0</sub> = 0 V;	2	3	4	V	
I <sub>L(off2)</sub>	OFF-state output sink current	V <sub>IN</sub> = 0 V; V <sub>OUT</sub> = V <sub>OL</sub> ; T <sub>J</sub> = -40 °C to 125 °C	-150	-40	-5	μA	
t <sub>DSTKON</sub>	OFF-state diagnostic delay time from falling edge of INPUT (see Figure 6. T <sub>DSTKON</sub> )	V <sub>SEN</sub> = 5 V; Ch ON to OFF transition; V <sub>IN0</sub> = 5 V to 0 V; I <sub>OUT0</sub> = 0 A; V <sub>OUT</sub> = 4 V	100	170	250	μs	
t <sub>D_OLV</sub>	Settling time for valid OFF-state open load diagnostic indication from rising edge of SEn	V <sub>IN</sub> = 0 V; V <sub>FR</sub> = 0 V; V <sub>OUT0</sub> = 4 V; V <sub>SEN</sub> = 0 V to 5 V			60	μs	
t <sub>D_VOL</sub>	OFF-state diagnostic delay time from rising edge of V <sub>OUT</sub>	V <sub>SEN</sub> = 5 V; Ch OFF; V <sub>IN0</sub> = 0 V; V <sub>OUT</sub> = 0 V to 4 V		5	30	μs	
Fault diagnostic feedback (see Table 10. Truth table)							
V <sub>SENSEH</sub>	Multisense output voltage in fault condition	13 V < V <sub>CC</sub> < 18 V; Ch0 in open load; R <sub>SENSE</sub> = 0.7 kΩ; V <sub>IN0</sub> = 0 V; V <sub>SEN</sub> = 5 V; I <sub>OUT0</sub> = 0 A; V <sub>OUT0</sub> = 4 V	5		7.5		V
		V <sub>CC</sub> = 7 V; Ch0 in open load; R <sub>SENSE</sub> = 0.7 kΩ; V <sub>IN0</sub> = 0 V; V <sub>SEN</sub> = 5 V; I <sub>OUT0</sub> = 0 A; V <sub>OUT0</sub> = 4 V	4.3				
I <sub>SENSEH</sub>	Current sense output current in fault condition	13 V < V <sub>CC</sub> < 18 V; V <sub>SENSE</sub> = 5 V; Ch0 in open load; V <sub>IN0</sub> = 0 V; V <sub>SEN</sub> = 5 V; I <sub>OUT0</sub> = 0 A; V <sub>OUT0</sub> = 4 V	7	8.6	12		mA
		V <sub>CC</sub> = 7 V; V <sub>SENSE</sub> = 5 V; Ch0 in open load; V <sub>IN0</sub> = 0 V; V <sub>SEN</sub> = 5 V; I <sub>OUT0</sub> = 0 A; V <sub>OUT0</sub> = 4 V	4.4				
Current sense timings (current sense mode - see Figure 5. Current sense timings (current sense mode)) <sup>(3)</sup>							
t <sub>DSENSE1H</sub>	Current sense settling time from rising edge of SEn	V <sub>IN</sub> = 5 V; V <sub>SEN</sub> = 0 V to 5 V; R <sub>SENSE</sub> = 1 kΩ; R <sub>L</sub> = 2.8 Ω			60	μs	
t <sub>DSENSE1L</sub>	Current sense disable delay time from falling edge of SEn	V <sub>IN</sub> = 5 V; V <sub>SEN</sub> = 5 V to 0 V; R <sub>SENSE</sub> = 1 kΩ; R <sub>L</sub> = 2.8 Ω		5	20	μs	
t <sub>DSENSE2H</sub>	Current sense settling time from rising edge of INPUT	V <sub>IN</sub> = 0 V to 5 V; V <sub>SEN</sub> = 5 V; R <sub>SENSE</sub> = 1 kΩ; R <sub>L</sub> = 2.8 Ω		100	200	μs	
Δt <sub>DSENSE2H</sub>	Current sense settling time from rising edge of I <sub>OUT</sub> (dynamic response to a step change of I <sub>OUT</sub> )	V <sub>IN</sub> = 5 V; V <sub>SEN</sub> = 5 V; R <sub>SENSE</sub> = 1 kΩ; R <sub>L</sub> = 2.8 Ω; I <sub>SENSE</sub> = 90% of I <sub>SENSEMAX</sub>			100	μs	
t <sub>DSENSE2L</sub>	Current sense turn-off delay time from falling edge of INPUT	V <sub>IN</sub> = 5 V to 0 V; V <sub>SEN</sub> = 5 V; R <sub>SENSE</sub> = 1 kΩ; R <sub>L</sub> = 2.8 Ω		70	250	μs	

7 V < V <sub>CC</sub> < 18 V; -40 °C < T <sub>J</sub> < 150 °C						
Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t <sub>DSENSE3H</sub>	Current sense latch-OFF filtering time		1.4	2.0	2.6	ms

1. Parameter specified by design, not tested in production.
2. All values refer to V<sub>CC</sub> = 13 V; T<sub>J</sub> = 25 °C, unless otherwise specified.
3. Transition delay is measured up to ±10% of final conditions.

Figure 4. Switching time and pulse skew

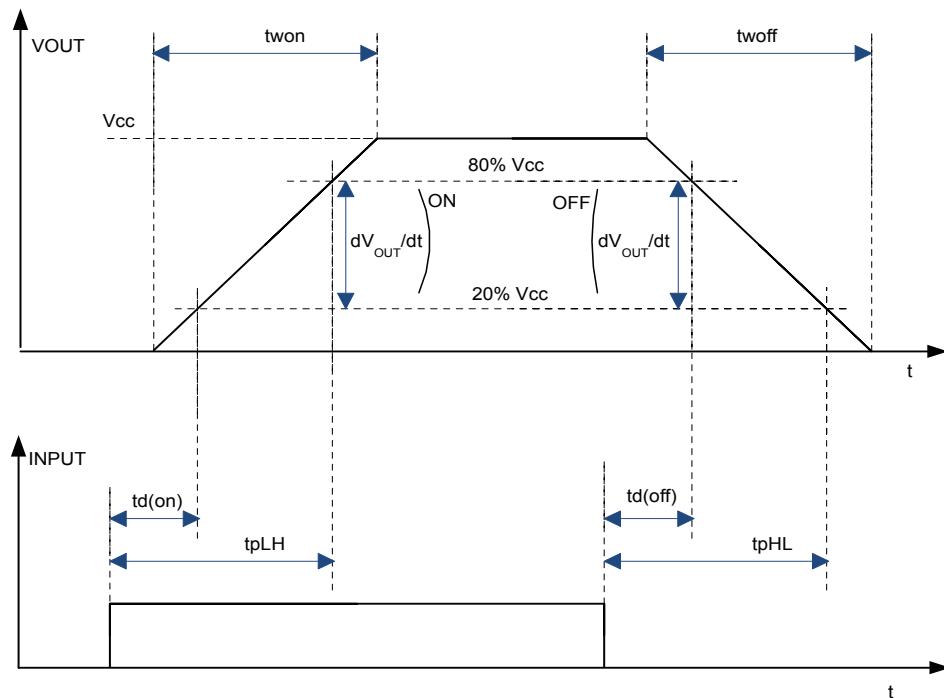


Figure 5. Current sense timings (current sense mode)

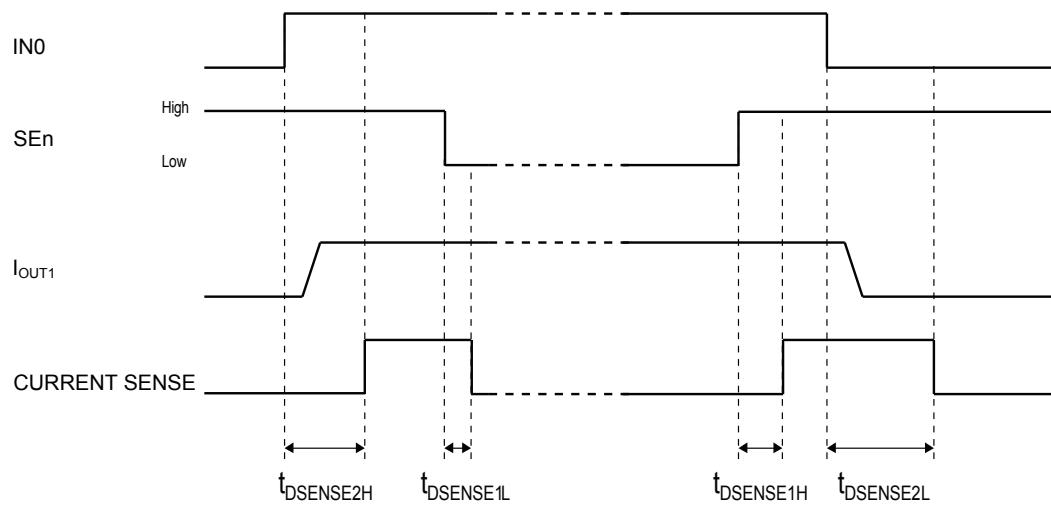


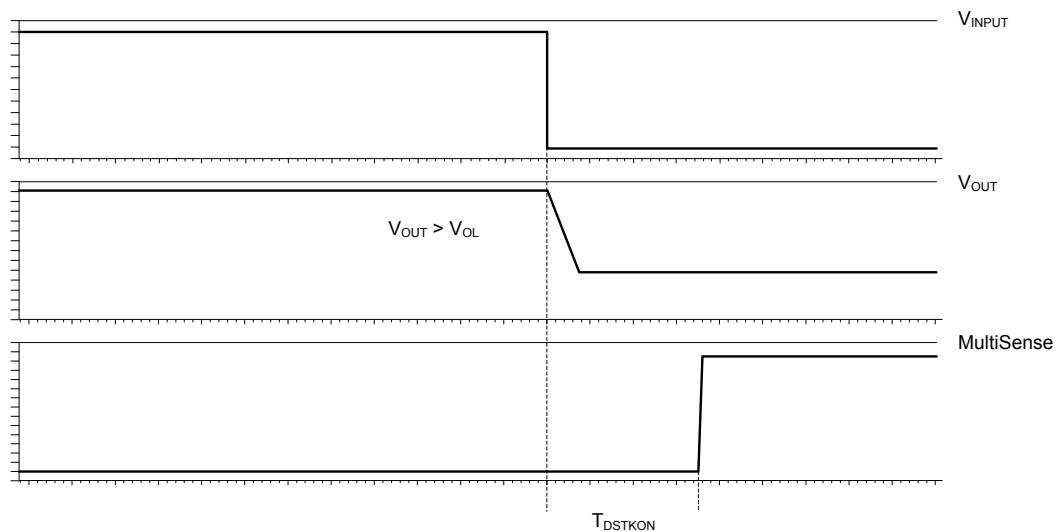
Figure 6.  $T_{DSTKON}$ 

Table 10. Truth table

Mode	Conditions	$IN_X$	FR	$SEn$	$OUT_X$	CS	Comments
Standby	All logic inputs low	L	L	L	L	Hi-Z	Low quiescent current consumption
Normal	Nominal load connected; $T_J < 150^\circ\text{C}$	L	X	See (1)	L	See (1)	
		H	L		H	See (1)	Outputs configured for auto-restart
		H	H		H	See (1)	Outputs configured for latch-off
Overload	Overload or short to GND causing: $T_J > T_{TSD}$ or $\Delta T_J > \Delta T_{J\_SD}$	L	X	See (1)	L	See (1)	
		H	L		H	See (1)	Output cycles with temperature hysteresis
		H	H		L	See (1)	Output latches-off
Undervoltage	$V_{CC} < V_{USD}$ (falling)	X	X	X	L	Hi-Z	Re-start when $V_{CC} > V_{USD} + V_{USDhyst}$ (rising)
OFF-state diagnostics	Short to $V_{CC}$	L	X	See (1)	H	See (1)	
	Open-load	L	X		H	See (1)	External pull-up
Negative output voltage	Inductive loads turn-off	L	X	See (1)	< 0 V	See (1)	


1. Refer to Table 11. Current sense multiplexer addressing

Table 11. Current sense multiplexer addressing


$SEn$	MUX channel	CS output			
		Normal mode	Overload	OFF-state diag.	Negative output
L		Hi-Z			
H	Channel 0 diagnostic	$I_{SENSE} = 1/K * I_{OUT0}$	$V_{SENSE} = V_{SENSEH}$	$V_{SENSE} = V_{SENSEH}$	Hi-Z

## 2.4 Waveforms


**Figure 7. Latch-off mode - Intermittent short circuit**

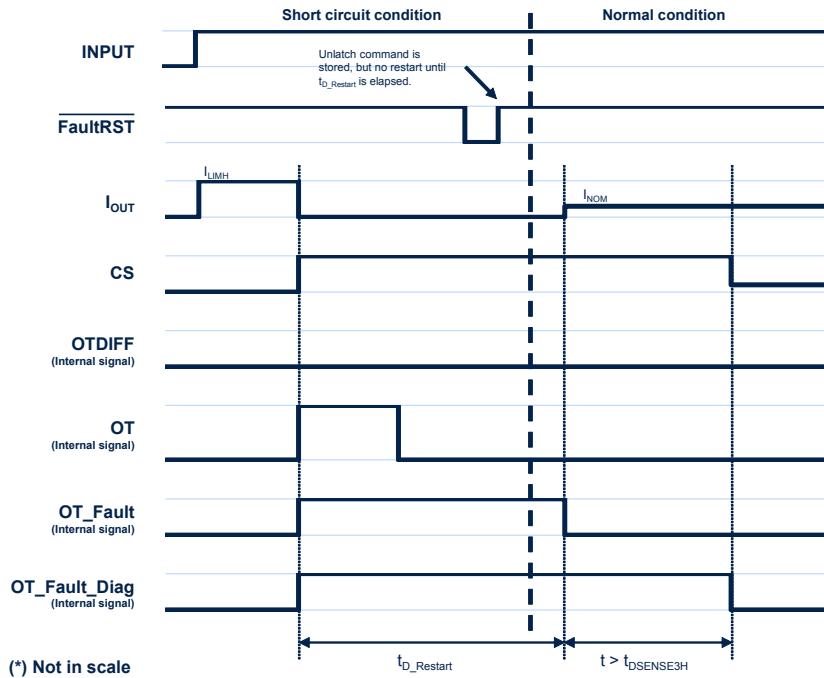


**Figure 8. Auto-restart mode - Intermittent short circuit**

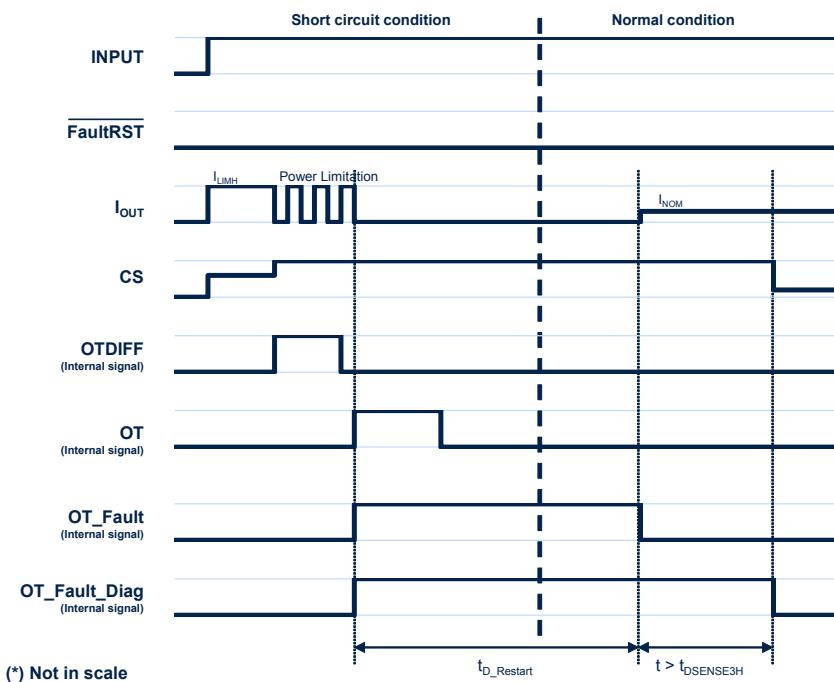


**Figure 9. Auto-restart mode - Permanent short circuit**

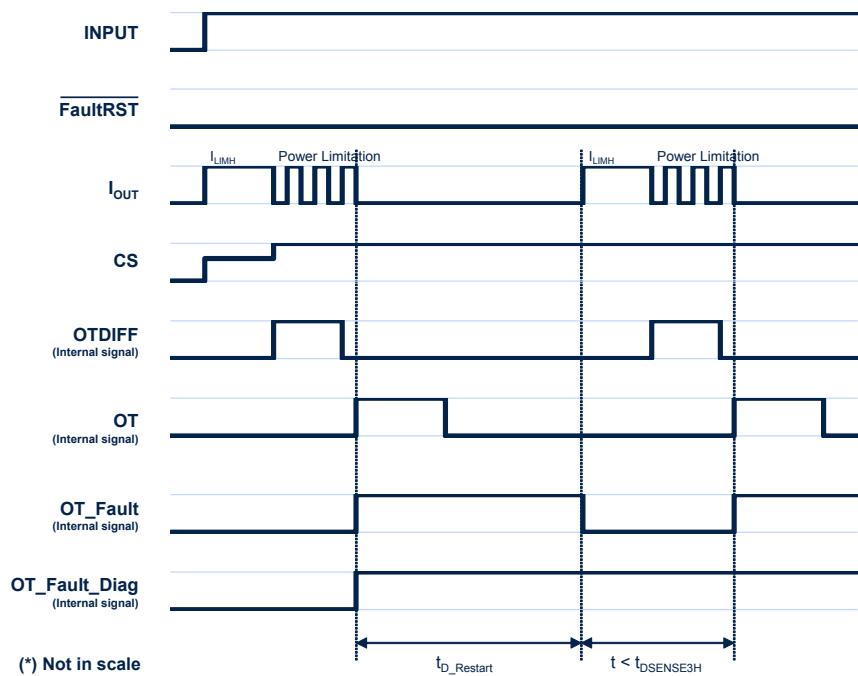

**Figure 10. Standby mode activation**

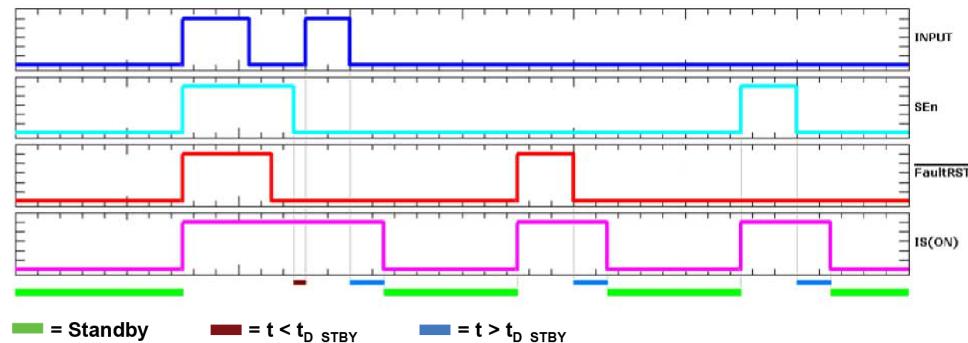


**Figure 11. Standby state diagram**

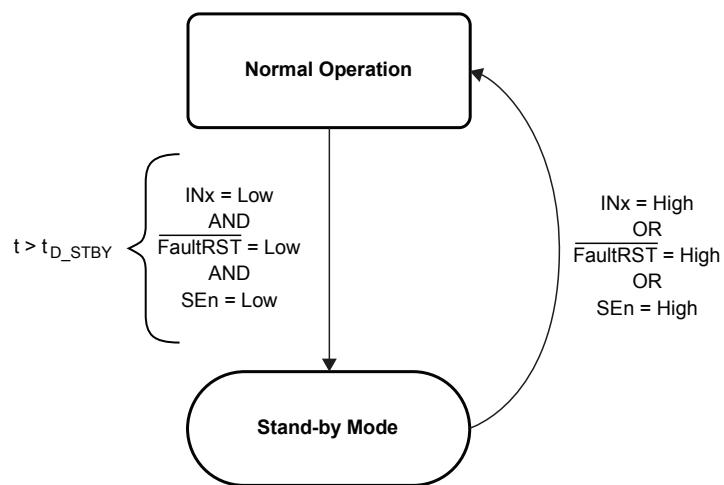


## 2.5 Electrical characteristics (curves)


**Figure 12. OFF-state output current**

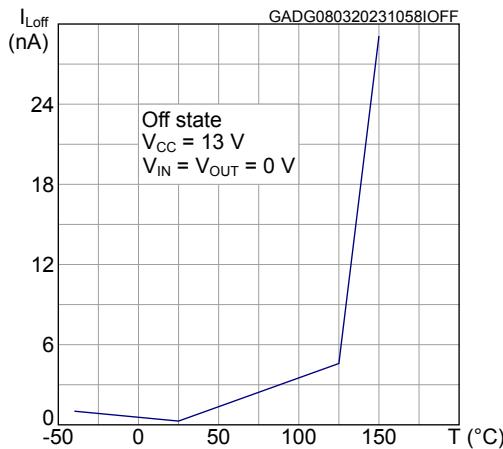


**Figure 13. Standby current**

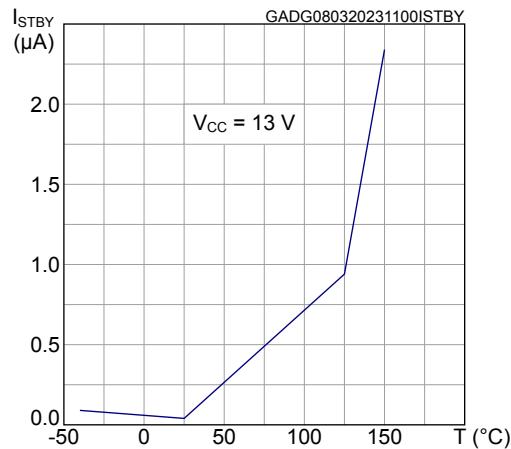


**Figure 14.  $I_{GND(ON)}$  vs  $T_C$**

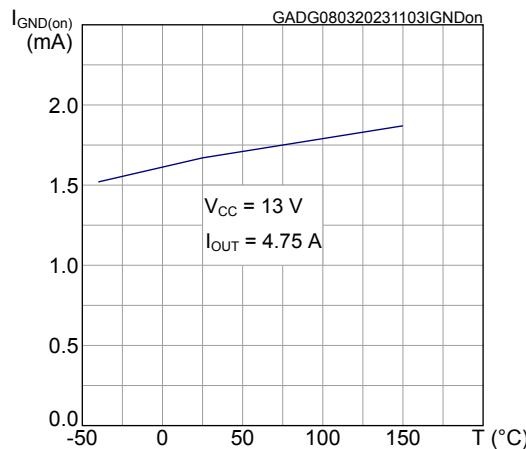

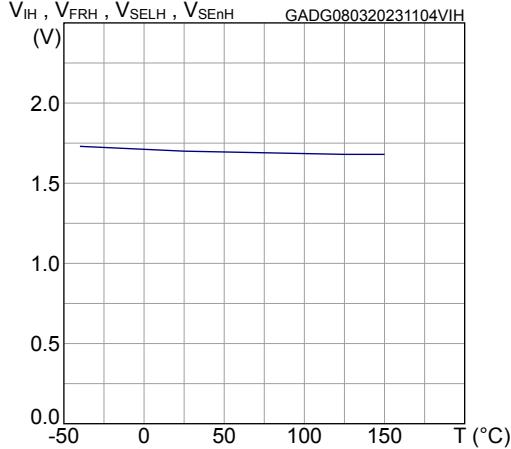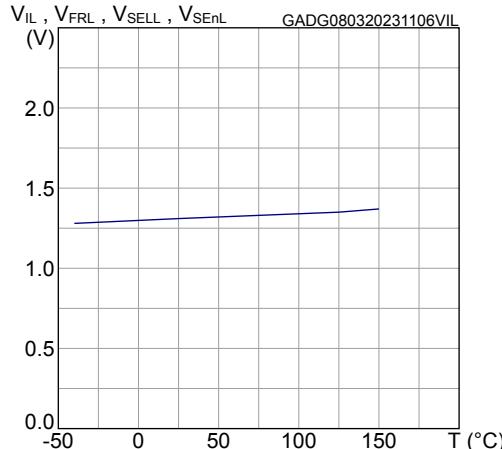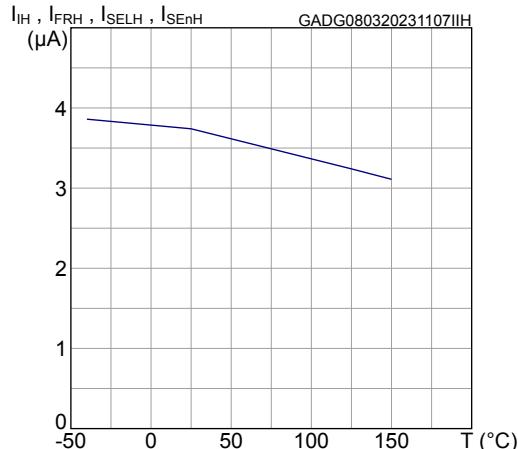
**Figure 15. Logic input high level voltage**

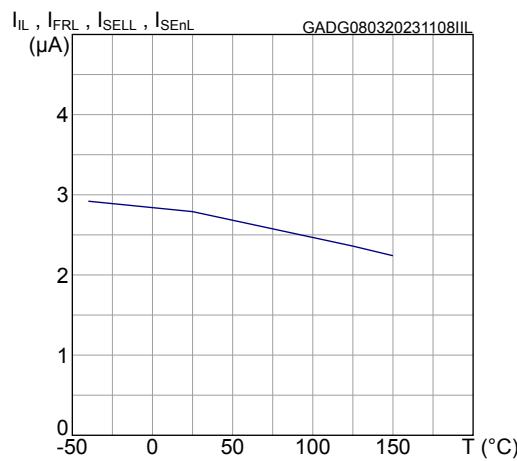
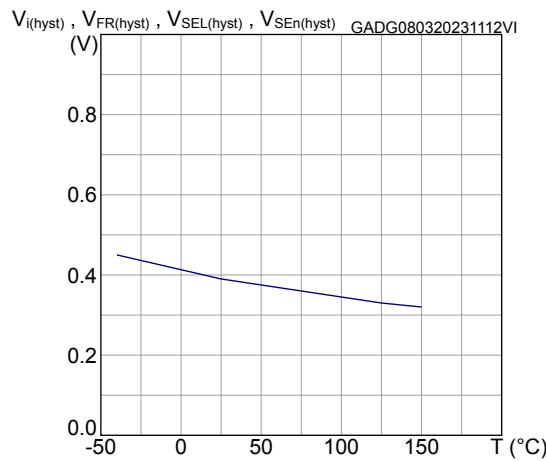
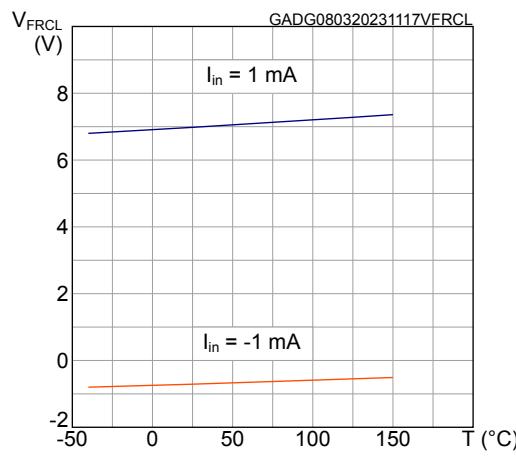
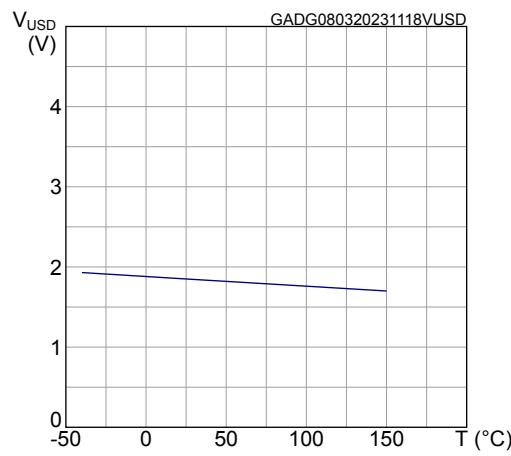
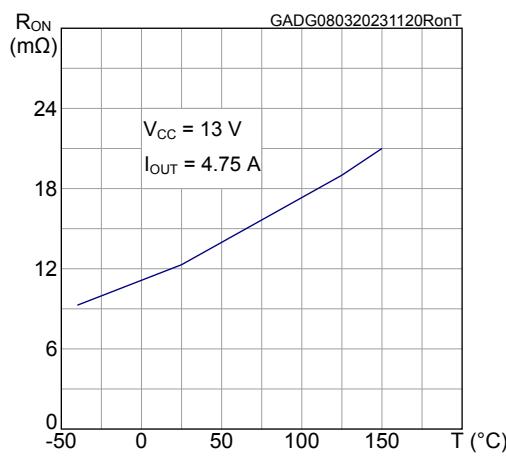
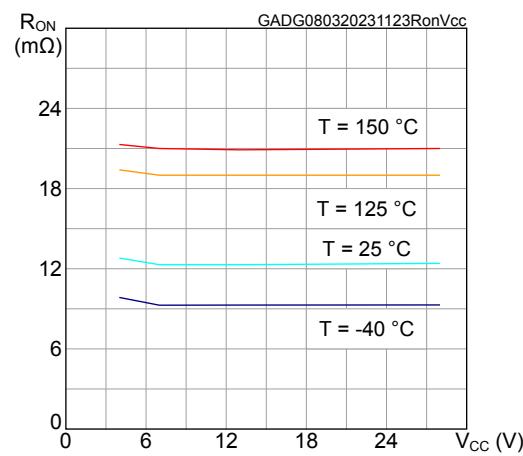


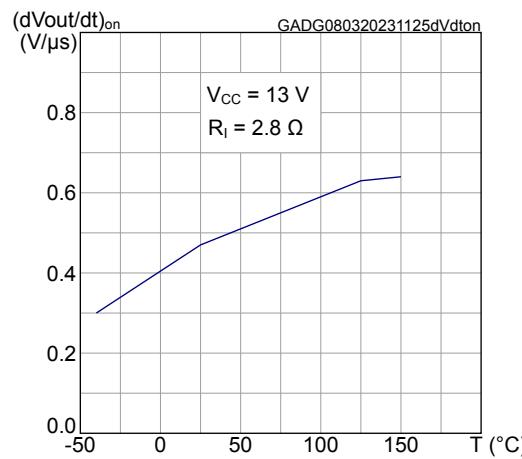
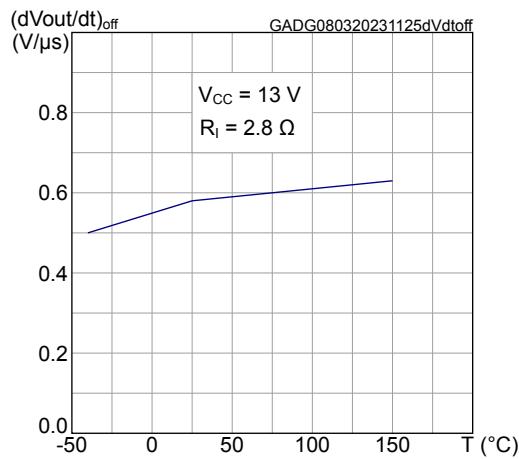
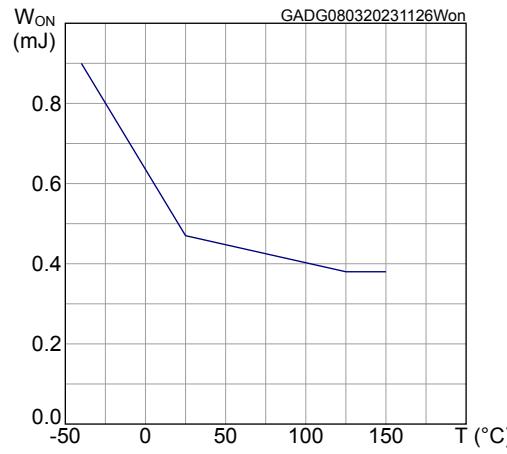
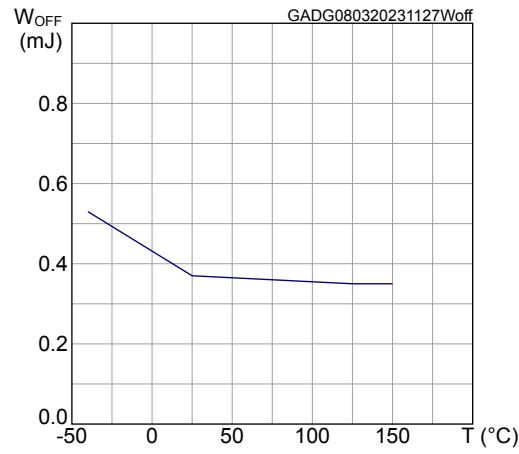
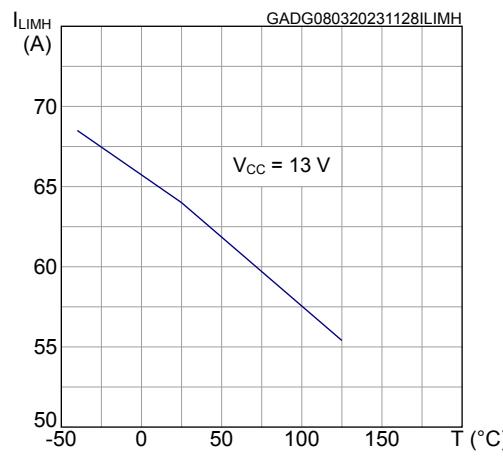
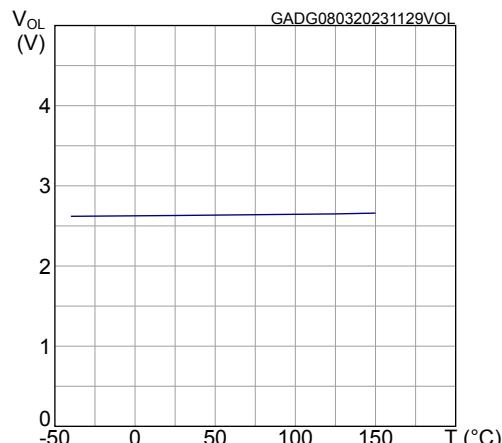
**Figure 16. Logic input low level voltage**


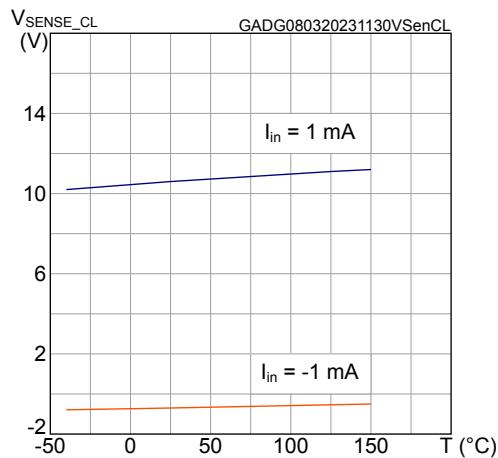


**Figure 17. High level logic input current**

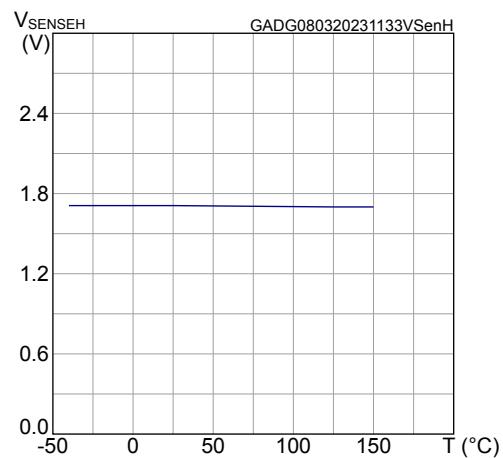

**Figure 18. Low level logic input current**

**Figure 19. Logic input hysteresis voltage**

**Figure 20. FaultRST input clamp voltage**

**Figure 21. Undervoltage shutdown**

**Figure 22. On-state resistance vs  $T_c$** 

**Figure 23. On-state resistance vs  $V_{CC}$** 


**Figure 24. Turn-on voltage slope**

**Figure 25. Turn-off voltage slope**

**Figure 26. W<sub>ON</sub> vs T<sub>c</sub>**

**Figure 27. W<sub>OFF</sub> vs T<sub>c</sub>**

**Figure 28. I<sub>LIMH</sub> vs T<sub>c</sub>**

**Figure 29. OFF-state open-load voltage detection threshold**


**Figure 30.  $V_{\text{Sense clamp}}$  vs  $T_c$** **Figure 31.  $V_{\text{senseh}}$  vs  $T_c$** 

## 3 Protections

### 3.1 Power limitation

The basic working principle of this protection consists of an indirect measurement of the junction temperature swing  $\Delta T_J$  through the direct measurement of the spatial temperature gradient on the device surface in order to automatically shut off the output MOSFET as soon as  $\Delta T_J$  exceeds the safety level of  $\Delta T_{J\_SD}$ . According to the voltage level on the FaultRST pin, the output MOSFET switches on and cycles with a thermal hysteresis according to the maximum instantaneous power which can be handled (FaultRST = Low) or remain off (FaultRST = High). The protection prevents fast thermal transient effects and, consequently, reduces thermo-mechanical fatigue.

### 3.2 Thermal shutdown

In case the junction temperature of the device exceeds the maximum allowed threshold (typically 175 °C), it automatically switches off and the diagnostic indication is triggered. According to the voltage level on the FaultRST pin, the device switches on again as soon as its junction temperature drops to  $T_R$  (FaultRST = Low) or remains off (FaultRST = High).

### 3.3 Current limitation


The device is equipped with an output current limiter in order to protect the silicon as well as the other components of the system (for example bonding wires, wiring harness, connectors, loads, etc.) from excessive current flow. Consequently, in case of short-circuit, overload or during load power-up, the output current is clamped to a safety level,  $I_{LIMH}$ , by operating the output power MOSFET in the active region.

### 3.4 Negative voltage clamp

In case the device drives inductive load, the output voltage reaches a negative value during turn off. A negative voltage clamp structure limits the maximum negative voltage to a certain value,  $V_{DEMAG}$ , allowing the inductor energy to be dissipated without damaging the device.

## 4 Application information

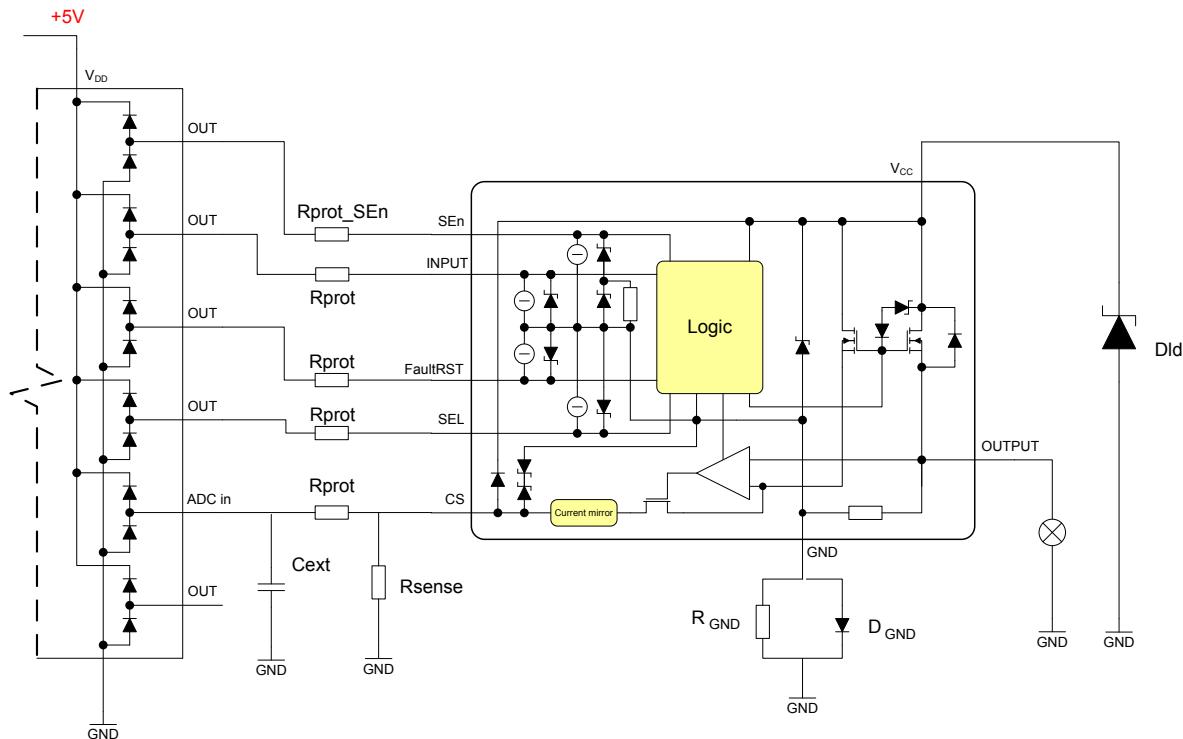
Figure 32. Application diagram



### 4.1

#### GND protection network against reverse battery

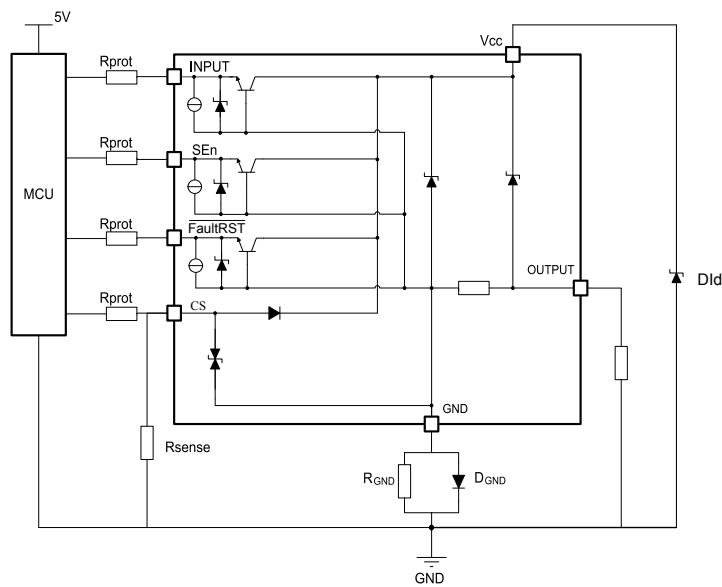Figure 33. Simplified internal structure



#### 4.1.1 Diode (DGND) in the ground line

A resistor (typ.  $R_{GND} = 4.7 \text{ k}\Omega$ ) should be inserted in parallel to  $D_{GND}$  if the device drives an inductive load.

This small signal diode can be safely shared amongst several different HSDs. Also in this case, the presence of the ground network produces a shift ( $\approx 600 \text{ mV}$ ) in the input threshold and in the status output values if the microprocessor ground is not common to the device ground. This shift does not vary if more than one HSD shares the same diode/resistor network.

### 4.2

#### Immunity against transient electrical disturbances

The immunity of the device against transient electrical emissions, conducted along the supply lines and injected into the  $V_{CC}$  pin, is tested in accordance with ISO7637-2:2011 (E) and ISO 16750-2:2010.

The related function performance status classification is shown in [Table 12. ISO 7637-2 - electrical transient conduction along supply line](#).

Test pulses are applied directly to DUT (device under test) both in ON and OFF-state and in accordance to ISO 7637-2:2011(E), chapter 4.

The DUT is intended as the current device only, with external components as shown in [Figure 34. M0-9 application schematic](#).

Status II is defined in ISO 7637-1 Function Performance Status Classification (FPSC) as follows: "The function does not perform as designed during the test but returns automatically to normal operation after the test".

**Table 12. ISO 7637-2 - electrical transient conduction along supply line**


Test Pulse 2011(E)	Test pulse severity level with Status II functional performance status		Minimum number of pulses or test time	Burst cycle / pulse repetition time		Pulse duration and pulse generator internal impedance
	Level	$U_S^{(1)}$		min	max	
1	III	-112 V	500 pulses	0.5 s		2 ms, 10 $\Omega$
2a	III	+55 V	500 pulses	0.2 s	5 s	50 $\mu\text{s}$ , 2 $\Omega$
3a	IV	-220 V	1h	90 ms	100 ms	0.1 $\mu\text{s}$ , 50 $\Omega$
3b	IV	+150 V	1h	90 ms	100 ms	0.1 $\mu\text{s}$ , 50 $\Omega$
4 <sup>(2)</sup>	IV	-7 V	1 pulse			100 ms, 0.01 $\Omega$
Load dump according to ISO 16750-2:2010						
Test B <sup>(3)</sup>		35 V	5 pulse	1 min		400 ms, 2 $\Omega$

1.  $U_S$  is the peak amplitude as defined for each test pulse in ISO 7637-2:2011(E), chapter 5.6.

2. Test pulse from ISO 7637-2:2004(E).

3. With 35 V external suppressor referred to ground ( $-40^\circ\text{C} < T_j < 150^\circ\text{C}$ ).

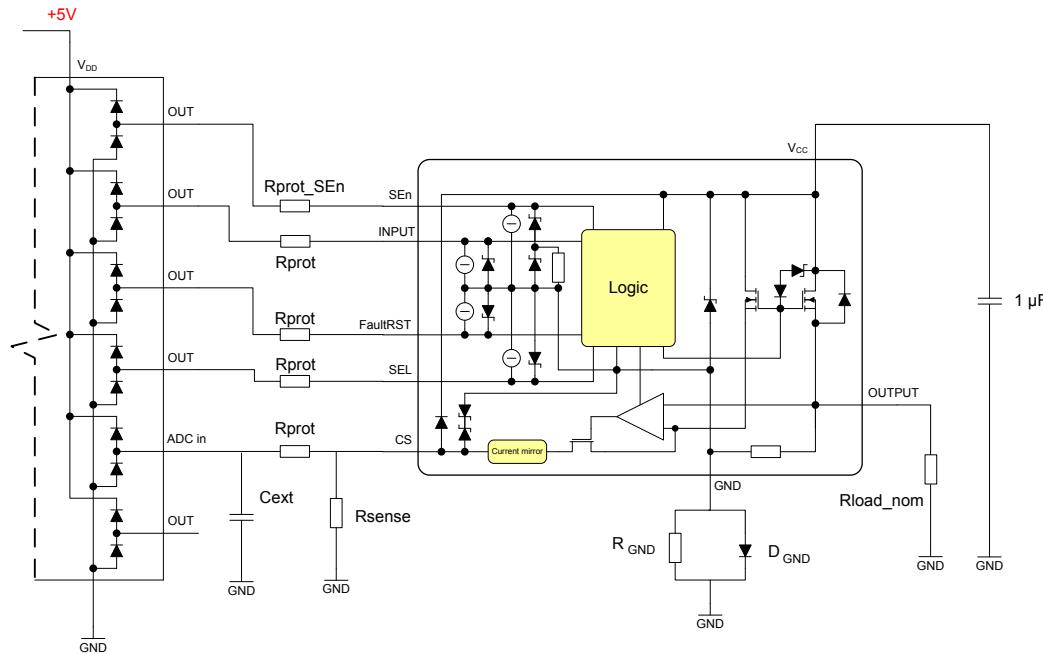Figure 34. M0-9 application schematic



#### 4.3

#### MCU I/Os protection

If a ground protection network is used and negative transients are present on the  $V_{CC}$  line, the control pins will be pulled negative. ST suggests to insert a resistor ( $R_{prot}$ ) in line both to prevent the microcontroller I/O pins from latching-up and to protect the HSD inputs.

The value of these resistors is a compromise between the leakage current of microcontroller and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of microcontroller I/Os.

#### Equation

$$\frac{V_{ccpeak}}{I_{latchup}} \leq R_{prot} \leq \frac{(V_{OH\mu C} - V_{IH} - V_{GND})}{I_{IHmax}} \quad (1)$$

Calculation example:

For  $V_{CCpeak} = -150$  V;  $I_{latchup} \geq 20$  mA;  $V_{OH\mu C} \geq 4.5$  V

$7.5 \text{ k}\Omega \leq R_{prot} \leq 140 \text{ k}\Omega$ .

Recommended values:  $R_{prot} = 15 \text{ k}\Omega$

#### 4.4

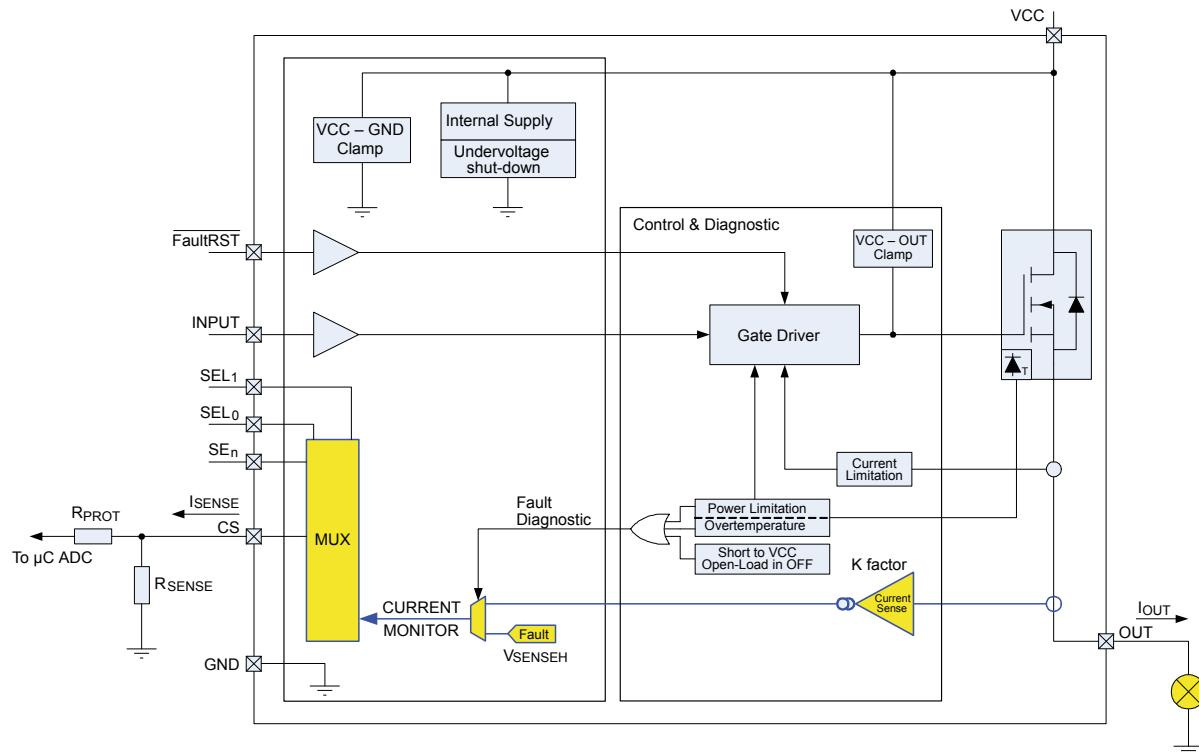
#### CS - analog current sense

Diagnostic information on device and load status are provided by an analog output pin (CS) delivering the following signals:

- Current monitor: current mirror of channel output current


Those signals are routed through an analog multiplexer which is configured and controlled by means of SELx and SEn pins, according to the address map in Table 11. Current sense multiplexer addressing.

### Figure 35. Current Sense and diagnostic – block diagram



#### 4.4.1 Principle of current sense signal generation

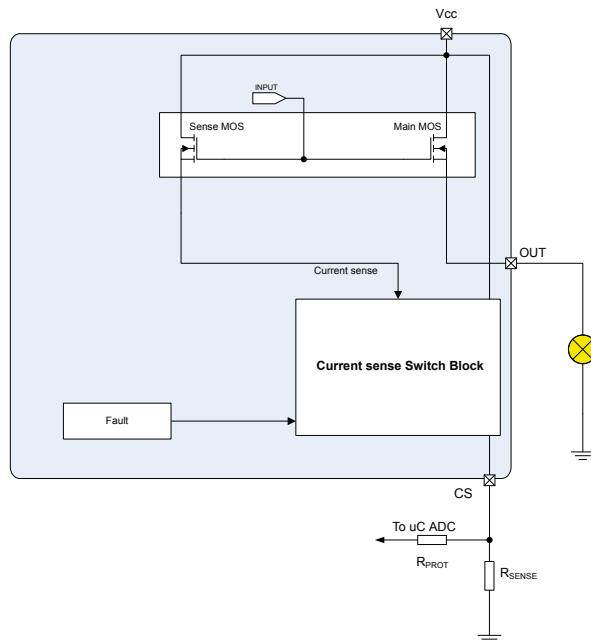**Figure 36. Current sense block diagram**



## Current sense

The output is capable of providing:

- Current mirror proportional to the load current in normal operation, delivering current proportional to the load according to a known ratio named K
  - Diagnostics flag in fault conditions delivering fixed voltage  $V_{SENSEH}$

The current delivered by the current sense circuit,  $I_{SENSE}$ , can be easily converted into a voltage  $V_{SENSE}$  by using an external sense resistor,  $R_{SENSE}$ , allowing continuous load monitoring and abnormal condition detection.

### Normal operation (channel ON, no fault, SEn active)

While the device is operating in normal conditions (no fault intervention),  $V_{SENSE}$  calculation can be done using simple equations.

Current provided by MultiSense output:  $I_{SENSE} = I_{OUT}/K$

Voltage on  $R_{SENSE}$ :  $V_{SENSE} = R_{SENSE} \cdot I_{SENSE} = R_{SENSE} \cdot I_{OUT}/K$

Where:

- $V_{SENSE}$  is the voltage measurable on the  $R_{SENSE}$  resistor
- $I_{SENSE}$  is the current provided from CurrentSense pin in current output mode
- $I_{OUT}$  is the current flowing through output
- K factor represents the ratio between PowerMOS cells and SenseMOS cells; its spread includes geometric factor spread, current sense amplifier offset and process parameters spread of overall circuitry specifying the ratio between  $I_{OUT}$  and  $I_{SENSE}$ .


### Failure flag indication

In case of power limitation/overtemperature, the fault is indicated by the CurrentSense pin, which is switched to a "current limited" voltage source,  $V_{SENSEH}$ .

In any case, the current sourced by the CurrentSense in this condition is limited to  $I_{SENSEH}$ .

The typical behavior in case of overload or hard short-circuit is shown in Waveforms.

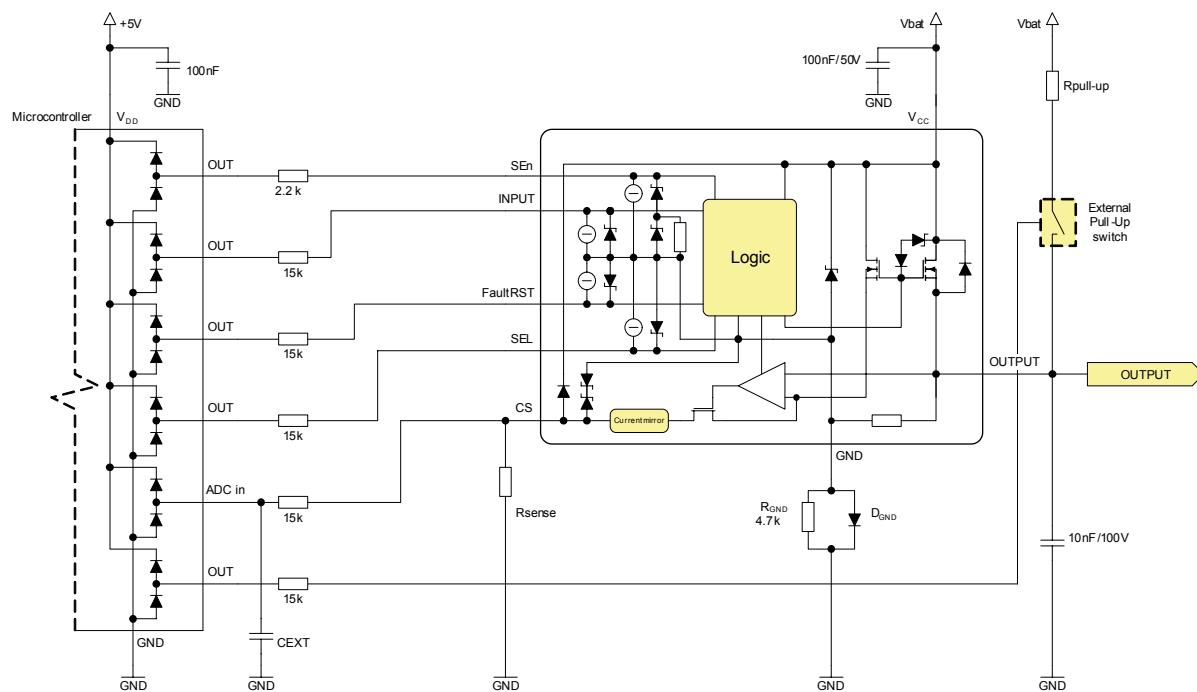**Figure 37. Analog HSD – open-load detection in off-state**



GAPG1201151432CFT

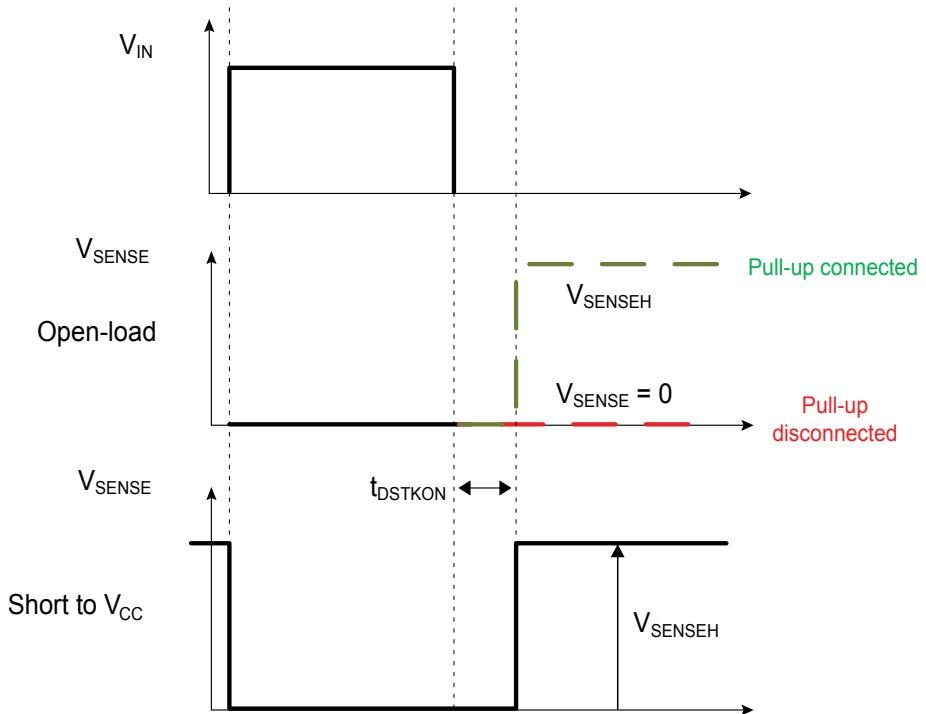
Figure 38. Open-load / short to V<sub>CC</sub> condition

Table 13. CS pin levels in off-state

Condition	Output	CS	SEn
Open-load	$V_{OUT} > V_{OL}$	Hi-Z	L
		$V_{SENSEH}$	H
	$V_{OUT} < V_{OL}$	Hi-Z	L
		0	H
Short to $V_{CC}$	$V_{OUT} > V_{OL}$	Hi-Z	L
		$V_{SENSEH}$	H
Nominal	$V_{OUT} < V_{OL}$	Hi-Z	L
		0	H

#### 4.4.2 Short to $V_{CC}$ and OFF-state open-load detection

##### Short to $V_{CC}$

A short circuit between  $V_{CC}$  and output is indicated by the relevant current sense pin set to  $V_{SENSEH}$  during the device off-state. Small or no current is delivered by the current sense during the on-state depending on the nature of the short-circuit.

##### OFF-state open-load with external circuitry

Detection of an open-load in off mode requires an external pull-up resistor  $R_{PU}$  connecting the output to a positive supply voltage  $V_{PU}$ .

It is preferable that  $V_{PU}$  is switched off during the module standby mode in order to avoid the overall standby current consumption to increase in normal conditions, i.e. when load is connected.

$R_{PU}$  must be selected in order to ensure  $V_{OUT} > V_{OLmax}$  in accordance with the following equation:

$$R_{PU} < \frac{V_{PU} - 4}{I_{L(off2)min@ 4V}} \quad (2)$$

## 5

Maximum demagnetization energy (V<sub>CC</sub> = 16 V)

Figure 39. Maximum turn off current versus inductance


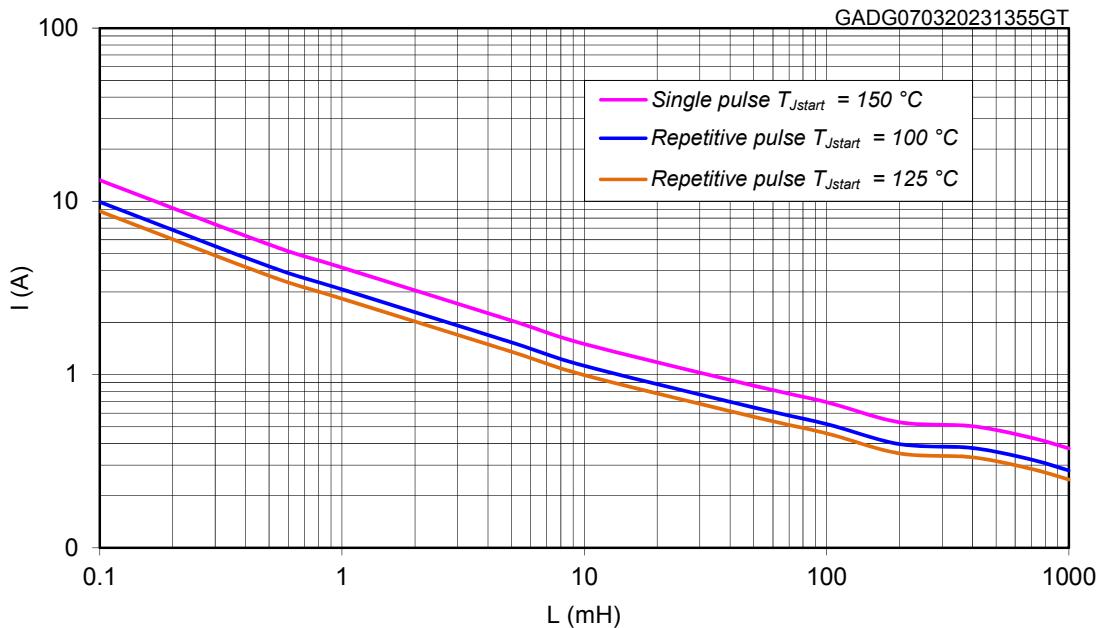


Figure 40. Maximum turn off energy versus inductance

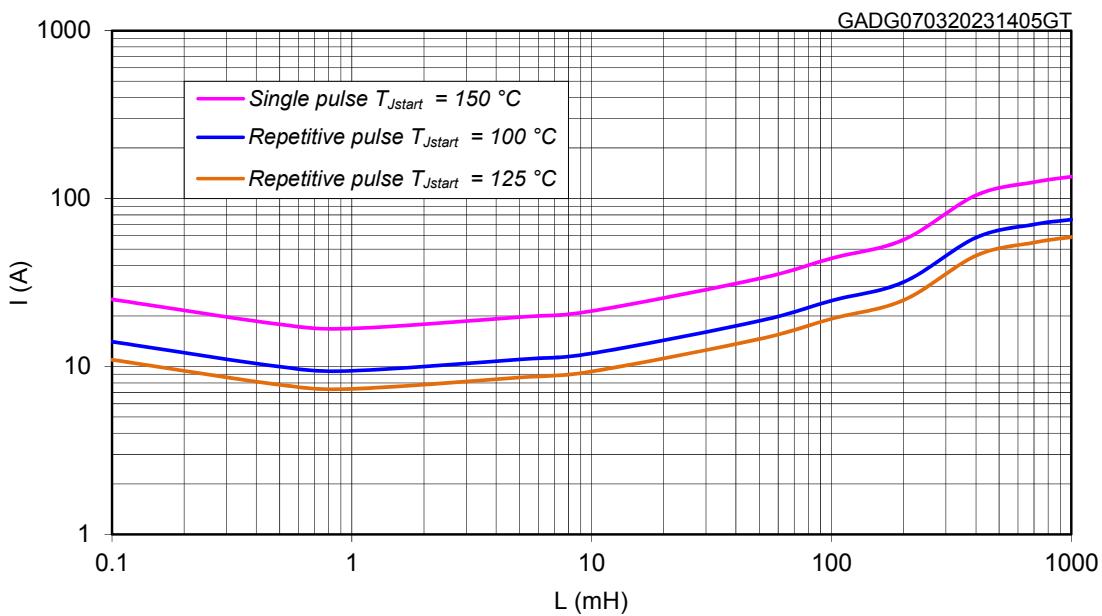

## 6 Package and PCB thermal data

### 6.1 PowerSSO-16 thermal data

Figure 41. PowerSSO-16 on two-layer PCB (2s0p to JEDEC JESD 51-5)

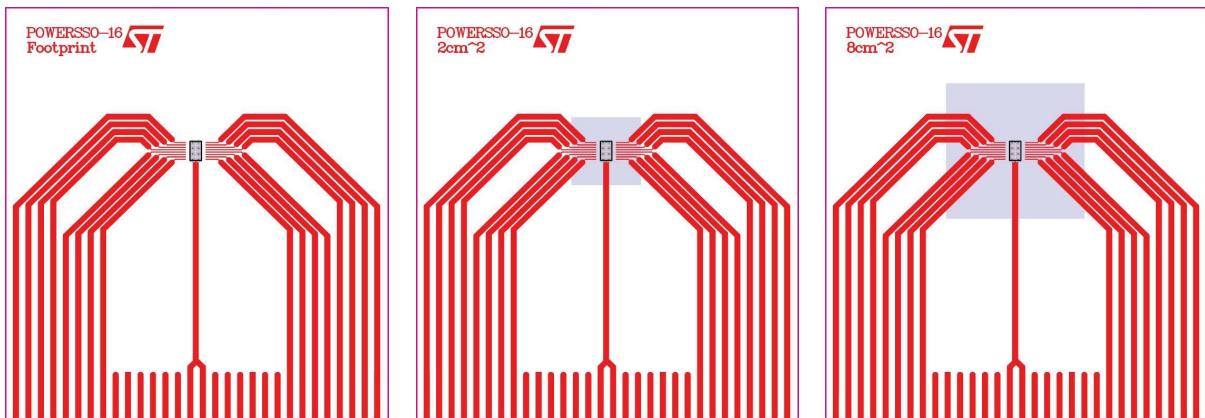


Figure 42. PowerSSO-16 on four-layer PCB (2s2p to JEDEC JESD 51-7)

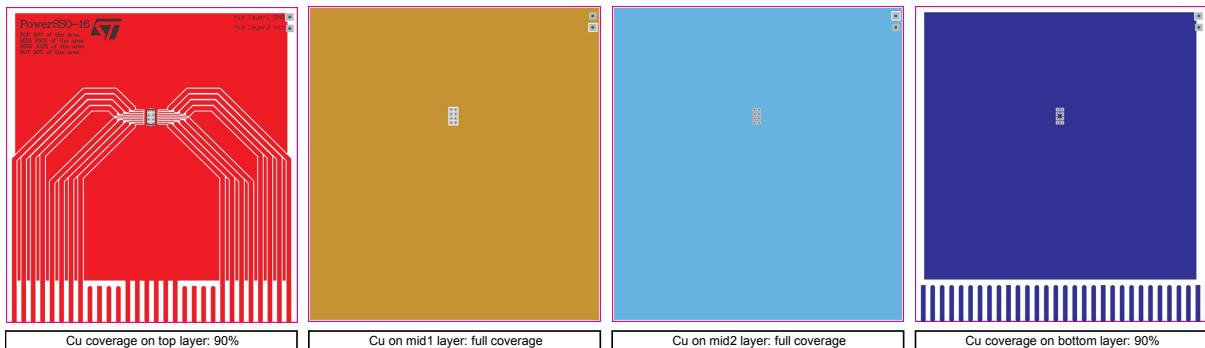
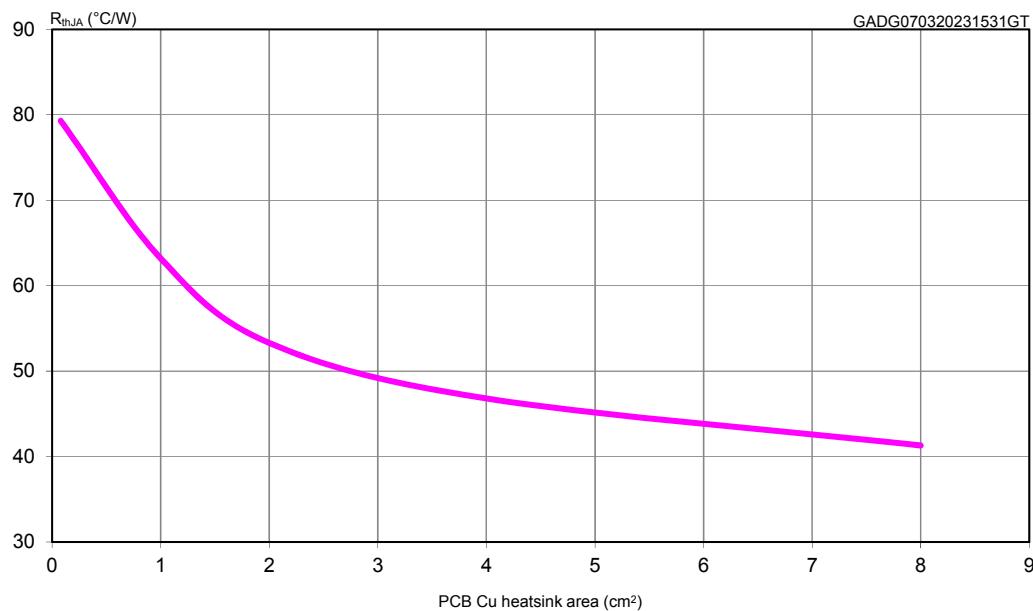
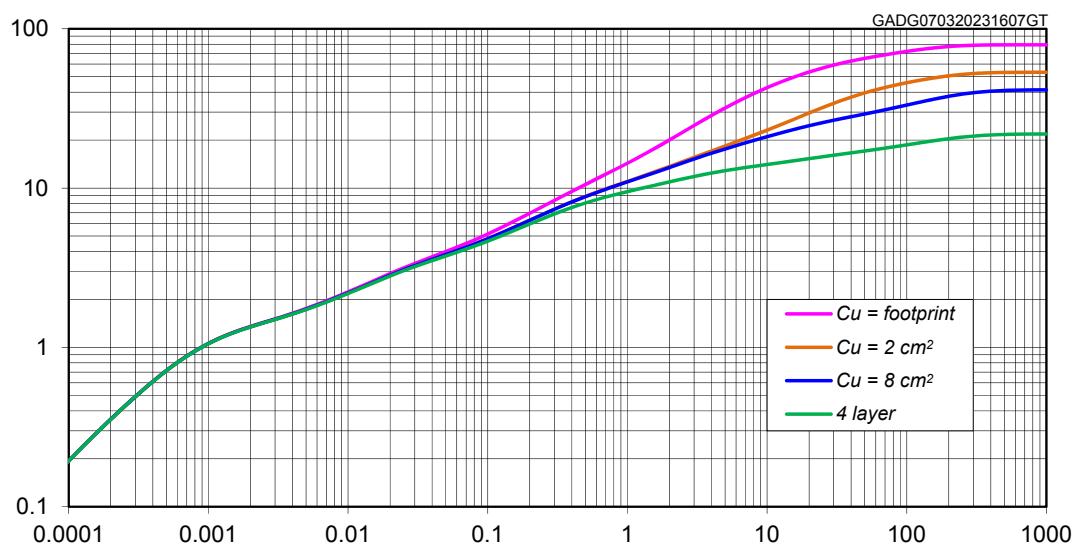


Table 14. PCB properties


Dimension	Value
Board finish thickness	1.6 mm ±10%
Board dimension	77 mm x 86 mm
Board Material	FR4
Copper thickness (top and bottom layers)	0.070 mm
Copper thickness (inner layers)	0.035 mm
Thermal vias separation	1.2 mm
Thermal via diameter	0.3 mm ±0.08 mm
Copper thickness on vias	0.025 mm
Footprint dimension (top layer)	2.2 mm x 3.9 mm
Heatsink copper area dimension (bottom layer)	Footprint, 2 cm <sup>2</sup> or 8 cm <sup>2</sup>

**Figure 43.**  $R_{thJA}$  vs PCB copper area in open box free air condition (one channel on)**Figure 44.** PowerSSO-16 thermal impedance junction ambient single pulse (one channel on)**Equation: pulse calculation formula**

$$Z_{Th\delta} = R_{Th} \cdot \delta + Z_{Th\text{tp}} (1 - \delta)$$

where  $\delta = t_p/T$

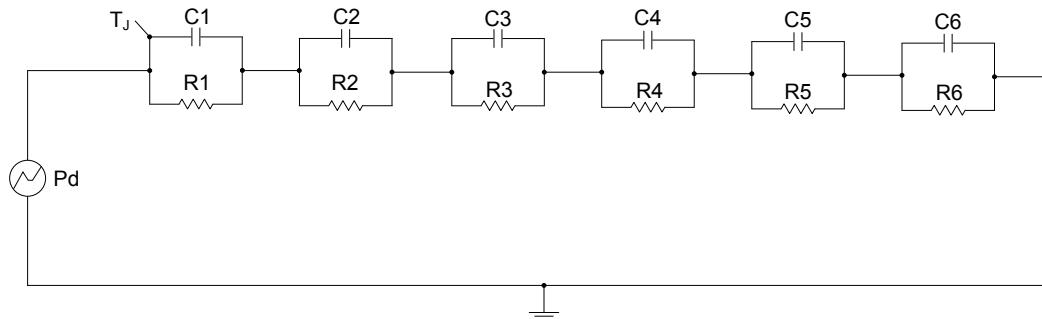Figure 45. Thermal fitting model of a double-channel HSD in PowerSSO-16



GAPGCFT00280

**Note:** the fitting model is a simplified thermal tool and is valid for transient evolutions where the embedded protections (power limitation or thermal cycling during thermal shutdown) are not triggered.

Table 15. Thermal parameters

Area/island (cm <sup>2</sup> )	FP	2	8	4L
R1 (°C/W)	1.1			
R2 (°C/W)	1.65			
R3 (°C/W)	4.6	4.6	4.6	4.6
R4 (°C/W)	16	6	6	4.5
R5 (°C/W)	30	20	20	3
R6 (°C/W)	26	20	18	7
C1 (W·s/°C)	0.0005			
C2 (W·s/°C)	0.008			
C3 (W·s/°C)	0.05	0.05	0.05	0.06
C4 (W·s/°C)	0.2	0.3	0.3	0.4
C5 (W·s/°C)	0.4	1	1	4
C6 (W·s/°C)	3	5	7	18

## 7 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 7.1 PowerSSO-16 package information

**Figure 46. PowerSSO-16 package dimensions**


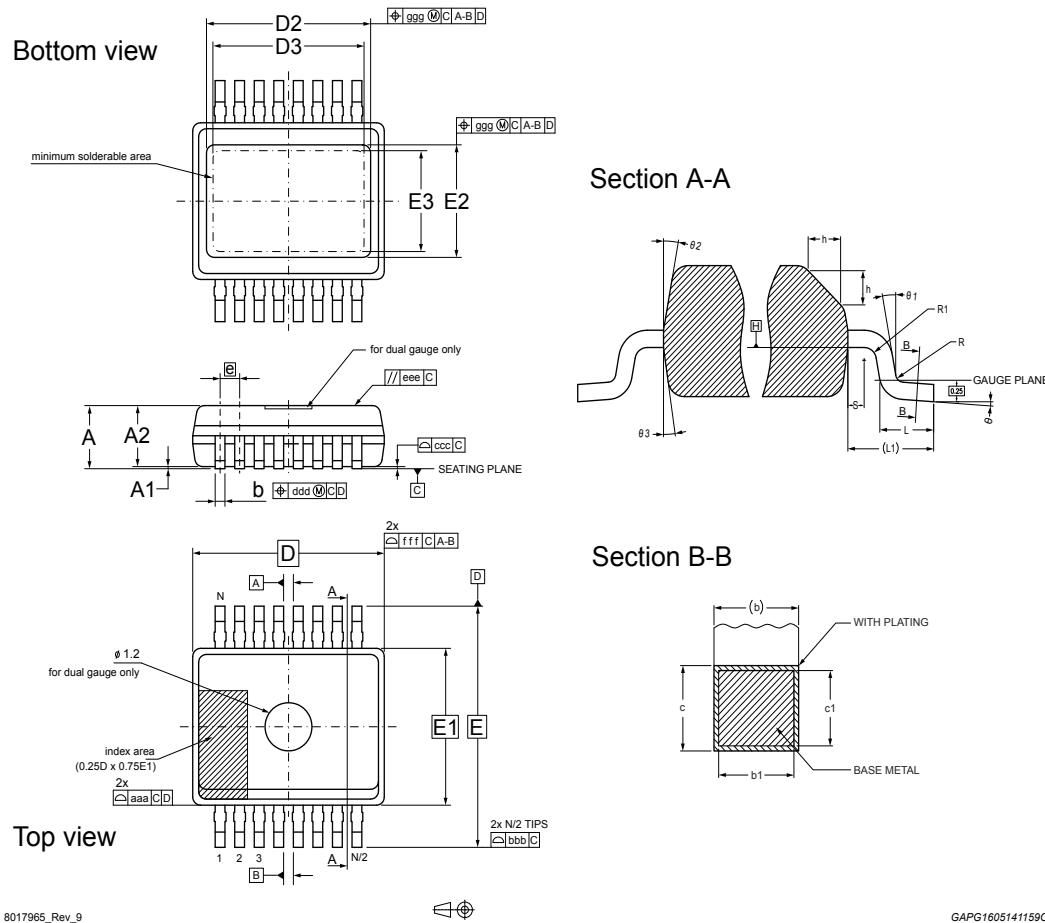


Table 16. PowerSSO-16 mechanical data

Symbol	Millimeters		
	Min.	Typ.	Max.
$\Theta$	0°		8°
$\Theta_1$	0°		
$\Theta_2$	5°		15°
$\Theta_3$	5°		15°
A			1.70
A1	0.00		0.10
A2	1.10		1.60
b	0.20		0.30
b1	0.20	0.25	0.28
c	0.19		0.25
c1	0.19	0.20	0.23
D		4.9 BSC	
D2	3.31		3.91
D3	2.61		
e		0.50 BSC	
E		6.00 BSC	
E1		3.90 BSC	
E2	2.20		2.80
E3	1.49		
h	0.25		0.50
L	0.40	0.60	0.85
L1		1.00 REF	
N		16	
R	0.07		
R1	0.07		
S	0.20		
Tolerance of form and position			
aaa		0.10	
bbb		0.10	
ccc		0.08	
ddd		0.08	
eee		0.10	
fff		0.10	
ggg		0.15	

## 7.2 PowerSSO-16 packing information

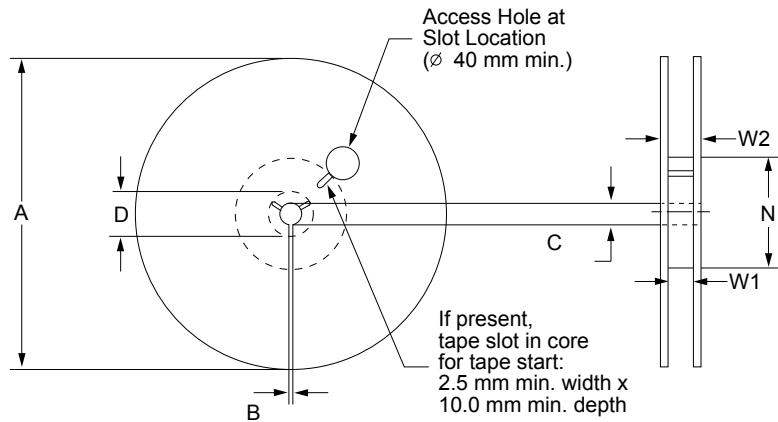Figure 47. PowerSSO-16 reel 13"




TAPG2004151655CFT

Table 17. Reel dimensions

Description	Value <sup>(1)</sup>
Base quantity	2500
Bulk quantity	2500
A (max)	330
B (min)	1.5
C (+0.5, -0.2)	13
D (min)	20.2
N	100
W1 (+2 /-0)	12.4
W2 (max)	18.4

1. All dimensions are in mm.

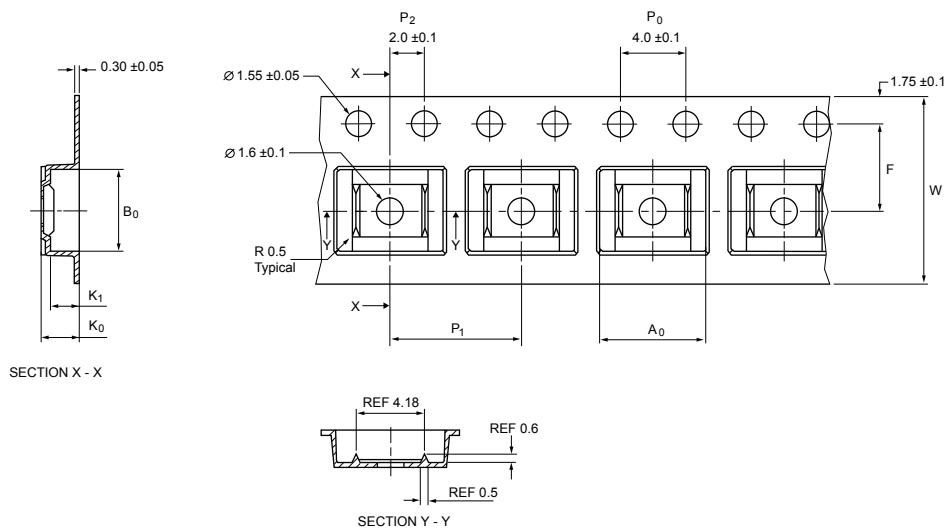Figure 48. PowerSSO-16 carrier tape




GAPG2204151242CFT

**Table 18. PowerSSO-16 carrier tape dimensions**

Description	Value <sup>(1)</sup>
A <sub>0</sub>	6.50 ± 0.1
B <sub>0</sub>	5.25 ± 0.1
K <sub>0</sub>	2.10 ± 0.1
K <sub>1</sub>	1.80 ± 0.1
F	5.50 ± 0.1
P <sub>1</sub>	8.00 ± 0.1
W	12.00 ± 0.3


1. All dimensions are in mm.

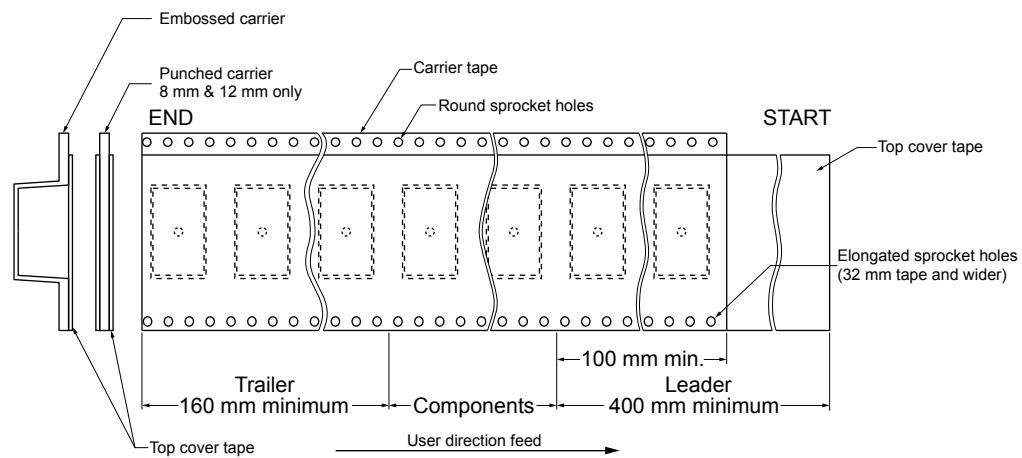**Figure 49. PowerSSO-16 schematic drawing of leader and trailer tape**

GAPG2004151511CFT

## 7.3 PowerSSO-16 marking information

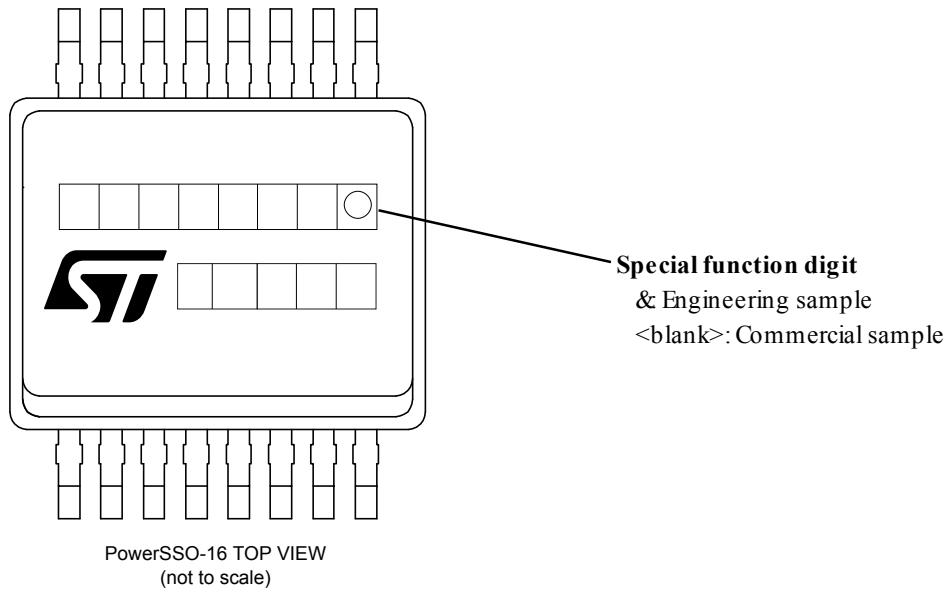Figure 50. PowerSSO-16 marking information



Parts marked as ‘&’ are not yet qualified and therefore not approved for use in production. ST is not responsible for any consequences resulting from such use. In no event will ST be liable for the customer using any of these engineering samples in production. ST’s Quality department must be contacted prior to any decision to use these engineering samples to run a qualification activity.

## Revision history

**Table 19. Document revision history**

Date	Revision	Changes
14-Sep-2018	1	Initial release.
18-May-2021	2	<p>Added:</p> <ul style="list-style-type: none"><li>• <i>Section 4 Application information;</i></li><li>• <i>Section 5 Package information.</i></li></ul> <p>Updated:</p> <ul style="list-style-type: none"><li>• <i>Figure 1. Block diagram;</i></li><li>• <i>Figure 2. Configuration diagram (top view);</i></li><li>• <i>Figure 3. Current and voltage conventions;</i></li><li>• <i>Table 3. Absolute maximum ratings;</i></li><li>• <i>Table 5. Power section;</i></li><li>• <i>Table 8. Protections;</i></li><li>• <i>Table 9. Current Sense;</i></li><li>• <i>Section Features;</i></li><li>• <i>Section 2.4 Waveforms.</i></li></ul> <p>Minor text changes in:</p> <ul style="list-style-type: none"><li>• <i>Table 1. Pin functions;</i></li><li>• <i>Table 7. Logic inputs.</i></li></ul>
13-Mar-2023	3	<p>Updated <i>Features and Applications.</i></p> <p>Updated <i>Table 2. Suggested connections for unused and not connected pins.</i></p> <p>Updated <i>Table 3. Absolute maximum ratings, Table 4. Thermal data, Table 6. Switching, Table 8. Protections and Table 9. Current sense.</i></p> <p>Updated <i>Figure 11. Standby state diagram.</i></p> <p>Added <i>Section 2.5 Electrical characteristics (curves),</i></p> <p><i>Section 5 Maximum demagnetization energy (VCC = 16 V) and Section 6 Package and PCB thermal data.</i></p> <p>Minor text changes.</p>
29-Jan-2025	4	<p>Updated <i>Figure 2. Configuration diagram (top view).</i></p> <p>Updated <i>Table 3. Absolute maximum ratings.</i></p> <p>Updated <i>Table 9. Current sense.</i></p> <p>Minor text changes .</p>

## Contents

<b>1</b>	<b>Block diagram and pin description</b>	<b>3</b>
<b>2</b>	<b>Electrical specification</b>	<b>5</b>
<b>2.1</b>	Absolute maximum ratings	5
<b>2.2</b>	Thermal data	6
<b>2.3</b>	Main electrical characteristics	6
<b>2.4</b>	Waveforms	13
<b>2.5</b>	Electrical characteristics (curves)	15
<b>3</b>	<b>Protections</b>	<b>19</b>
<b>3.1</b>	Power limitation	19
<b>3.2</b>	Thermal shutdown	19
<b>3.3</b>	Current limitation	19
<b>3.4</b>	Negative voltage clamp	19
<b>4</b>	<b>Application information</b>	<b>20</b>
<b>4.1</b>	GND protection network against reverse battery	20
<b>4.1.1</b>	Diode (DGND) in the ground line	21
<b>4.2</b>	Immunity against transient electrical disturbances	21
<b>4.3</b>	MCU I/Os protection	22
<b>4.4</b>	CS - analog current sense	22
<b>4.4.1</b>	Principle of current sense signal generation	23
<b>4.4.2</b>	Short to V <sub>CC</sub> and OFF-state open-load detection	25
<b>5</b>	<b>Maximum demagnetization energy (V<sub>CC</sub> = 16 V)</b>	<b>26</b>
<b>6</b>	<b>Package and PCB thermal data</b>	<b>27</b>
<b>6.1</b>	PowerSSO-16 thermal data	27
<b>7</b>	<b>Package information</b>	<b>30</b>
<b>7.1</b>	PowerSSO-16 package information	30
<b>7.2</b>	PowerSSO-16 packing information	32
<b>7.3</b>	PowerSSO-16 marking information	34
<b>Revision history</b>		<b>35</b>

## List of tables

<b>Table 1.</b>	Pin functions . . . . .	3
<b>Table 2.</b>	Suggested connections for unused and not connected pins . . . . .	4
<b>Table 3.</b>	Absolute maximum ratings . . . . .	5
<b>Table 4.</b>	Thermal data. . . . .	6
<b>Table 5.</b>	Power section . . . . .	6
<b>Table 6.</b>	Switching . . . . .	7
<b>Table 7.</b>	Logic inputs. . . . .	7
<b>Table 8.</b>	Protections . . . . .	8
<b>Table 9.</b>	Current sense . . . . .	9
<b>Table 10.</b>	Truth table . . . . .	12
<b>Table 11.</b>	Current sense multiplexer addressing. . . . .	12
<b>Table 12.</b>	ISO 7637-2 - electrical transient conduction along supply line . . . . .	21
<b>Table 13.</b>	CS pin levels in off-state . . . . .	25
<b>Table 14.</b>	PCB properties . . . . .	27
<b>Table 15.</b>	Thermal parameters. . . . .	29
<b>Table 16.</b>	PowerSSO-16 mechanical data . . . . .	31
<b>Table 17.</b>	Reel dimensions . . . . .	32
<b>Table 18.</b>	PowerSSO-16 carrier tape dimensions . . . . .	33
<b>Table 19.</b>	Document revision history . . . . .	35

## List of figures

<b>Figure 1.</b>	Block diagram . . . . .	3
<b>Figure 2.</b>	Configuration diagram (top view) . . . . .	4
<b>Figure 3.</b>	Current and voltage conventions . . . . .	5
<b>Figure 4.</b>	Switching time and pulse skew . . . . .	11
<b>Figure 5.</b>	Current sense timings (current sense mode) . . . . .	11
<b>Figure 6.</b>	T <sub>DSTKON</sub> . . . . .	12
<b>Figure 7.</b>	Latch-off mode - Intermittent short circuit . . . . .	13
<b>Figure 8.</b>	Auto-restart mode - Intermittent short circuit . . . . .	13
<b>Figure 9.</b>	Auto-restart mode - Permanent short circuit . . . . .	14
<b>Figure 10.</b>	Standby mode activation . . . . .	14
<b>Figure 11.</b>	Standby state diagram . . . . .	14
<b>Figure 12.</b>	OFF-state output current . . . . .	15
<b>Figure 13.</b>	Standby current . . . . .	15
<b>Figure 14.</b>	I <sub>GND(ON)</sub> vs T <sub>C</sub> . . . . .	15
<b>Figure 15.</b>	Logic input high level voltage . . . . .	15
<b>Figure 16.</b>	Logic input low level voltage . . . . .	15
<b>Figure 17.</b>	High level logic input current . . . . .	15
<b>Figure 18.</b>	Low level logic input current . . . . .	16
<b>Figure 19.</b>	Logic input hysteresis voltage . . . . .	16
<b>Figure 20.</b>	FaultRST input clamp voltage . . . . .	16
<b>Figure 21.</b>	Undervoltage shutdown . . . . .	16
<b>Figure 22.</b>	On-state resistance vs T <sub>C</sub> . . . . .	16
<b>Figure 23.</b>	On-state resistance vs V <sub>CC</sub> . . . . .	16
<b>Figure 24.</b>	Turn-on voltage slope . . . . .	17
<b>Figure 25.</b>	Turn-off voltage slope . . . . .	17
<b>Figure 26.</b>	W <sub>ON</sub> vs T <sub>C</sub> . . . . .	17
<b>Figure 27.</b>	W <sub>OFF</sub> vs T <sub>C</sub> . . . . .	17
<b>Figure 28.</b>	I <sub>LIMH</sub> vs T <sub>C</sub> . . . . .	17
<b>Figure 29.</b>	OFF-state open-load voltage detection threshold . . . . .	17
<b>Figure 30.</b>	V <sub>Sense</sub> clamp vs T <sub>C</sub> . . . . .	18
<b>Figure 31.</b>	V <sub>senseh</sub> vs T <sub>C</sub> . . . . .	18
<b>Figure 32.</b>	Application diagram . . . . .	20
<b>Figure 33.</b>	Simplified internal structure . . . . .	20
<b>Figure 34.</b>	M0-9 application schematic . . . . .	22
<b>Figure 35.</b>	Current Sense and diagnostic – block diagram . . . . .	23
<b>Figure 36.</b>	Current sense block diagram . . . . .	23
<b>Figure 37.</b>	Analog HSD – open-load detection in off-state . . . . .	24
<b>Figure 38.</b>	Open-load / short to V <sub>CC</sub> condition . . . . .	25
<b>Figure 39.</b>	Maximum turn off current versus inductance . . . . .	26
<b>Figure 40.</b>	Maximum turn off energy versus inductance . . . . .	26
<b>Figure 41.</b>	PowerSSO-16 on two-layer PCB (2s0p to JEDEC JESD 51-5) . . . . .	27
<b>Figure 42.</b>	PowerSSO-16 on four-layer PCB (2s2p to JEDEC JESD 51-7) . . . . .	27
<b>Figure 43.</b>	R <sub>thJA</sub> vs PCB copper area in open box free air condition (one channel on) . . . . .	28
<b>Figure 44.</b>	PowerSSO-16 thermal impedance junction ambient single pulse (one channel on) . . . . .	28
<b>Figure 45.</b>	Thermal fitting model of a double-channel HSD in PowerSSO-16 . . . . .	29
<b>Figure 46.</b>	PowerSSO-16 package dimensions . . . . .	30
<b>Figure 47.</b>	PowerSSO-16 reel 13" . . . . .	32
<b>Figure 48.</b>	PowerSSO-16 carrier tape . . . . .	32
<b>Figure 49.</b>	PowerSSO-16 schematic drawing of leader and trailer tape . . . . .	33
<b>Figure 50.</b>	PowerSSO-16 marking information . . . . .	34

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved