

# MFHA

## SMD current sensing resistor-metal film



### Applications

- Switched-mode power supply (SMPS)
- Voltage regulator module
- Power management
- Stepper motor drives


### Environmental compliance



### Product features

- Low sensing resistance
- 1206 (3216 metric) to 2512 (6432 metric)
- High power dissipation
- AEC-Q200 compliant
- Moisture sensitivity level (MSL): 1


Table 1. Part numbering configuration scheme

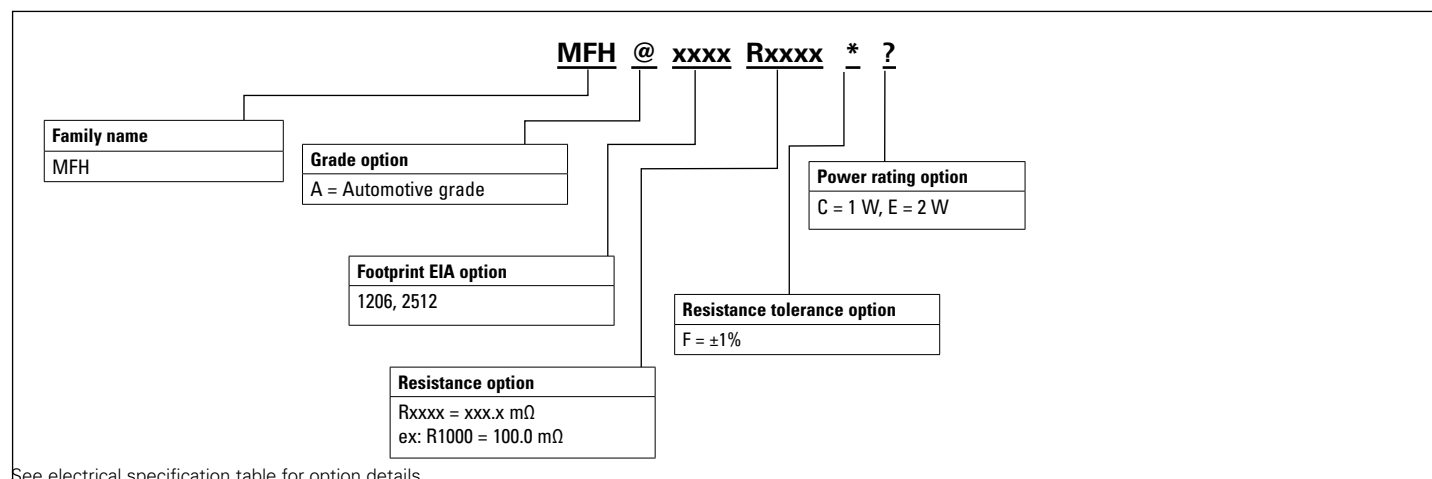


## Mechanical parameters- Inches [mm]

| Family   | Size code      | L                                      | W                                      | C                                      | d                                      | t                                      |
|----------|----------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| MFHA1206 | 1206<br>[3216] | $0.126 \pm 0.008$<br>[3.20 $\pm$ 0.20] | $0.063 \pm 0.008$<br>[1.60 $\pm$ 0.20] | $0.020 \pm 0.012$<br>[0.50 $\pm$ 0.30] | $0.016 \pm 0.008$<br>[0.40 $\pm$ 0.20] | $0.022 \pm 0.004$<br>[0.55 $\pm$ 0.10] |
| MFHA2512 | 2512<br>[6432] | $0.252 \pm 0.008$<br>[6.40 $\pm$ 0.20] | $0.126 \pm 0.008$<br>[3.20 $\pm$ 0.20] | $0.024 \pm 0.012$<br>[0.60 $\pm$ 0.30] | $0.020 \pm 0.010$<br>[0.50 $\pm$ 0.25] | $0.022 \pm 0.004$<br>[0.55 $\pm$ 0.10] |


Part marking: Rxxx: (xxx= resistance value in ohms expressed in 3 digits, 100 = 0.100  $\Omega$  or 100 m $\Omega$ )

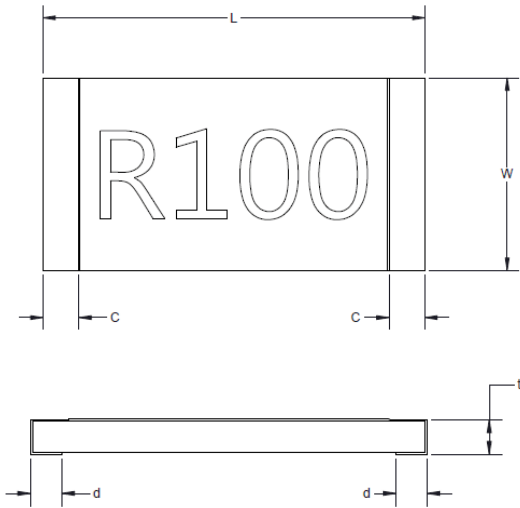

## Recommended pad layout-mm

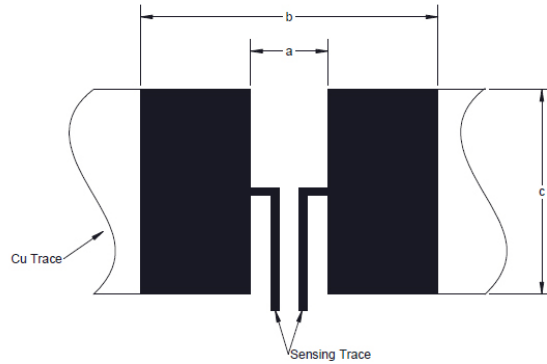

## Construction

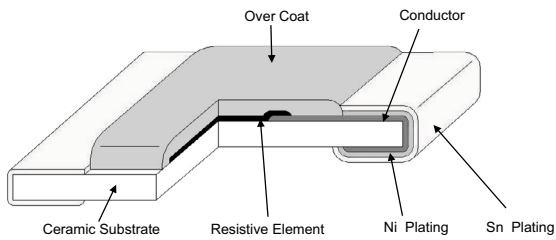

| Family   | a   | b   | c   |
|----------|-----|-----|-----|
| MFHA1206 | 0.7 | 5.1 | 2.5 |
| MFHA2512 | 1.0 | 7.5 | 4.2 |

1. The copper foil minimum thickness of PCB needs 3 oz.
2. Pad layout dimension tolerance is  $\pm 0.1$  mm.
3. The resistance will change slightly after soldered; it is dependent on PCB pad size design and it's necessary to consider the effect of the resistance increase or decrease.

## Electrical specifications

| Part number     | Size               | Grade option | Resistance value mΩ<br>(Part number code) | Resistance tolerance<br>(Part number code) | Power rating<br>(Part number code) | TCR<br>(ppm/°C) | Operating temperature |
|-----------------|--------------------|--------------|-------------------------------------------|--------------------------------------------|------------------------------------|-----------------|-----------------------|
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 100 (1000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 120 (1200)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 150 (1500)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 200 (2000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 220 (2200)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 250 (2500)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 270 (2700)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 300 (3000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 400 (4000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 500 (5000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 510 (5100)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@1206Rxxxx*? | 1206 (3216 metric) | A            | 700 (7000)                                | ±1% (F)                                    | 1 W (C)                            | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 100 (1000)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 120 (1200)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 130 (1300)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 150 (1500)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 180 (1800)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 200 (2000)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 240 (2400)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 250 (2500)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 270 (2700)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 300 (3000)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 360 (3600)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 390 (3900)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 450 (4500)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 470 (4700)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 500 (5000)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 510 (5100)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 680 (6800)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |
| MFH@2512Rxxxx*? | 2512 (6432 metric) | A            | 750 (7500)                                | ±1% (F)                                    | 2.0 W (E)                          | ± 100           | -55 °C to +155 °C     |

@= Enter grade option from table above (A=Automotive)

Rxxxx = Enter resistance code option from table above xxxxx= resistance code (R1000 = 100.0 mΩ)

\*= Enter resistance tolerance code from table above (F= ±1%)

?= Enter power rating code from table above (C= 1 W, E= 2.0 W)


### Packaging information- mm

Supplied in tape and reel on a 7.0" diameter reel  
(EIA-481 compliant)

| Size | Tape            | Quantity |
|------|-----------------|----------|
| 1206 | 7 inch paper    | 5K       |
| 2512 | 7 inch embossed | 4K       |


### Tape carrier and dimensions

#### Paper tape carrier drawing

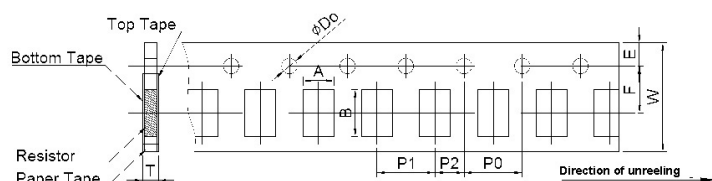


| Dimension | 1206           | 2512            |
|-----------|----------------|-----------------|
| E         | $1.75 \pm 0.1$ | $1.75 \pm 0.1$  |
| F         | $3.5 \pm 0.05$ | $5.5 \pm 0.05$  |
| P2        | $2.0 \pm 0.1$  | $2.0 \pm 0.1$   |
| D0        | $1.5 \pm 0.1$  | $1.5 \pm 0.1$   |
| P0        | $4.0 \pm 0.1$  | $4.0 \pm 0.1$   |
| W         | $8.0 \pm 0.1$  | $12.0 \pm 0.1$  |
| P1        | $4.0 \pm 0.1$  | $4.0 \pm 0.1$   |
| A0        | $2.0 \pm 0.15$ | $3.6 \pm 0.2$   |
| B0        | $3.6 \pm 0.2$  | $6.9 \pm 0.2$   |
| T         | $0.84 \pm 0.1$ | $0.85 \pm 0.15$ |

#### Embossed tape carrier drawing

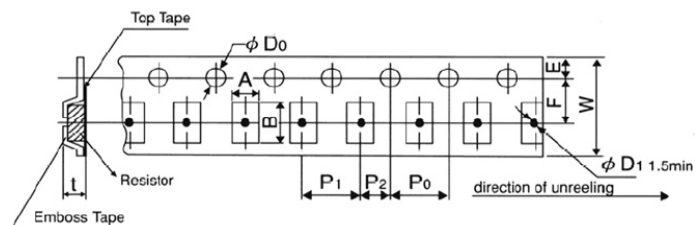

### Reel dimensions

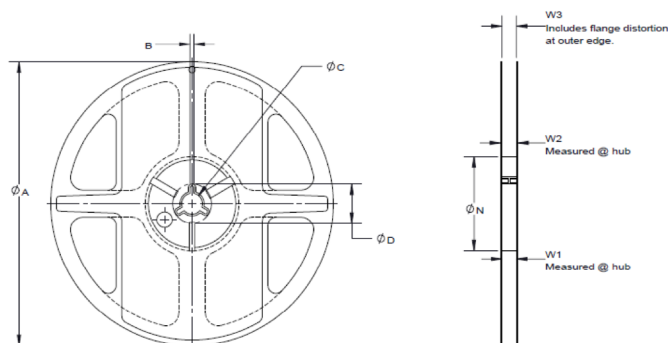


| Size | A             | B             | C              | D  | N            | W1             | W2             | W3 |
|------|---------------|---------------|----------------|----|--------------|----------------|----------------|----|
| 1206 | $178 \pm 2.0$ | $3.5 \pm 0.5$ | $13.0 \pm 1.0$ | na | $60 \pm 1.0$ | $9.0 \pm 1.0$  | $11.5 \pm 1.0$ | na |
| 2512 | $178 \pm 2.0$ | $3.5 \pm 0.5$ | $13.0 \pm 1.0$ | na | $60 \pm 1.0$ | $13.0 \pm 1.0$ | $15.5 \pm 1.0$ | na |

## General specifications

|                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation resistance: > 100 MΩ                                                                                                                                                                                                              |
| Temperature coefficient of resistance: IEC60115-1 4.8, +25 °C to +125 °C                                                                                                                                                                     |
| Short time overload: IEC60115-1 4.13, 2.5 X rated power for 5 s                                                                                                                                                                              |
| High temperature exposure (storage): AEC-Q200-REV D-Test 3, MIL-STD202 Method 108, 1000 hours. @ +155 °C unpowered                                                                                                                           |
| Temperature cycling: AEC-Q200-REV D-Test 4, JESD22 Method JA-104, 1000 cycles (-55 °C to +155 °C), 30 minute maximum dwell time at each temperature extreme. 1 minute maximum transition time.                                               |
| Biased humidity: AEC-Q200-REV D-Test 7, MIL-STD-202 method 103, 1000 hours +85 °C/85% RH. Note: Specified conditions: 10% of operating power (not exceeding max working voltage).                                                            |
| Operational life: AEC-Q200-REV D-Test 8, MIL-STD-202 method 108, 1000 hours, +125 °C at rated derating power.                                                                                                                                |
| Resistance to solvents: AEC-Q200-REV D-Test 12, MIL-STD-202 method 215, a: Isopropyl alcohol : mineral spirits= 1 : 3, b: Terpene defluxer (Bioact EC-7R) c: Deionized water : Propylene glycol Monomethyl ether : monoethanolamine = 42 : 1 |
| Mechanical shock: AEC-Q200-REV D-Test 13, MIL-STD-202 Method 213, half sine shock pulse, peak value is 100 g's. Normal duration (D) is 6 (ms)                                                                                                |
| Vibration: AEC-Q200-REV D-Test 14, MIL-STD-202 method 204, 5 g's for 20 minutes, 12 cycles each of 3 orientations. Test from 10-2000 Hz                                                                                                      |
| Resistance to soldering heat: AEC-Q200-REV D-Test 15, MIL-STD-202 method 210, Condition B : Immerse in eutectic solder at +260 °C ± 5 °C for 10 ± 1 second                                                                                   |
| Thermal shock: AEC-Q200-REV D-Test 16, MIL-STD-202 method 107, -55 °C/+155 °C. 300 cycles, Maximum transfer time 20 seconds, Dwell time 15 minutes. Air-Air                                                                                  |
| ESD: AEC-Q200-REV D-Test 17, AEC-Q200-002 or ISO/DIS 10605, verify the voltage setting at 500 V                                                                                                                                              |
| Solderability: AEC-Q200-REV D-Test 18, J-STD-002, method B, aging 4 hours at +155 °C dry heat Lead-free solder bath at +235 °C ± 3 °C, Dipping time: 3 ± 0.5 seconds, > 95% area covered with tin                                            |
| Flammability: AEC-Q200-REV D-Test 20, UL-94, Without plastic part, Use final goods burn with methane twice, each 10 s, Electrical test not required.                                                                                         |
| Board flex (bending): AEC-Q200-REV D-Test 21, AEC-Q200-005, The duration of the applied forces shall be 60 (+ 5) seconds, 2 mm deflection                                                                                                    |
| Terminal strength (SMD): AEC-Q200-REV D-Test 22, AEC-Q200-006, Force of 1.8 kg for 60 seconds                                                                                                                                                |

## Temperature derating curve

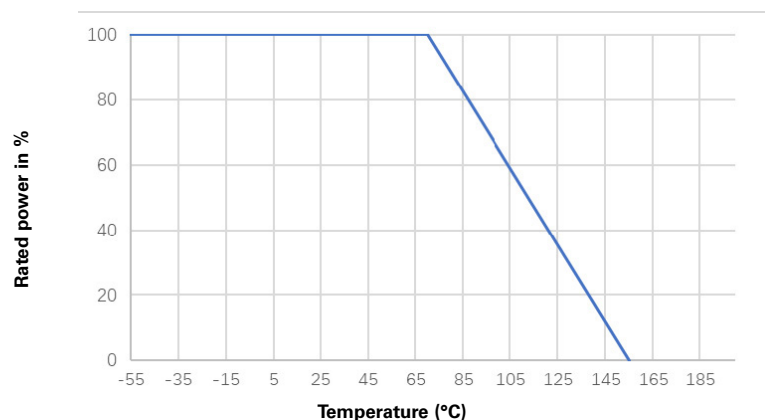

## Rated current & voltage

The rated current and voltage are calculated by the following formula:

$$I = \sqrt{P \div R}$$

I: Rated current (A)


P: Rated power (W)

$$V = \sqrt{P \times R}$$

V: Rated voltage (V)

R: Resistance value (Ω)

## Solder reflow profile

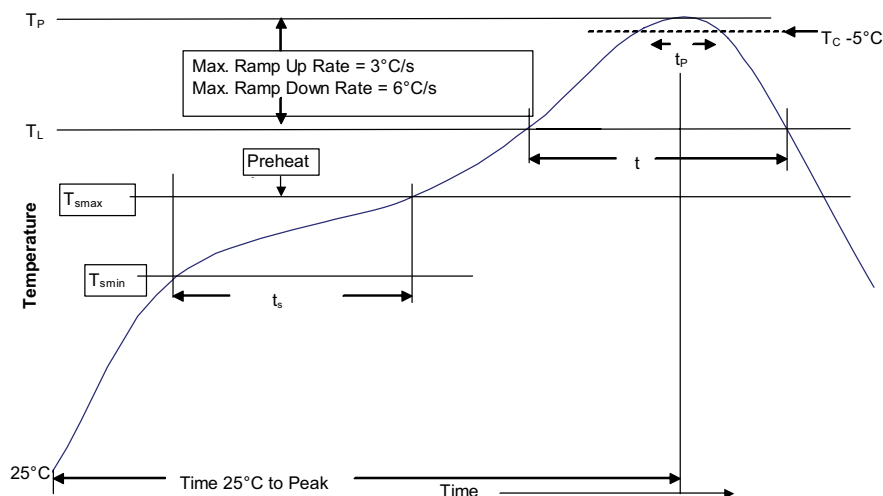

| Profile feature                                                                   | Lead (Pb) free solder |
|-----------------------------------------------------------------------------------|-----------------------|
| Preheat and soak                                                                  |                       |
| • Temperature min. ( $T_{smin}$ )                                                 | 150 °C                |
| • Temperature max. ( $T_{smax}$ )                                                 | 200 °C                |
| • Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )                                     | 60-150 seconds        |
| Ramp up rate $T_L$ to $T_p$                                                       | 3 °C/ second max.     |
| Liquidous temperature ( $T_L$ )                                                   | 217 °C                |
| Time ( $t_L$ ) maintained above $T_L$                                             | 60-120 seconds        |
| Peak package body temperature ( $T_p$ )*                                          | 260 °C                |
| Time ( $t_p$ )* within 5 °C of the specified classification temperature ( $T_c$ ) | 10 seconds*           |
| Ramp-down rate ( $T_p$ to $T_L$ )                                                 | 6 °C/ second max.     |
| Time 25 °C to peak temperature                                                    | 8 minutes max.        |

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

## Manual solder

+350 °C  $\pm$ 10 °C , 3 +1/-0 seconds 1 time (by soldering iron), generally manual, hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2022 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1178 BU-ELX22038  
June 2022

Eaton is a registered trademark.

All other trademarks are property  
of their respective owners.

Follow us on social media to get the  
latest product and support information.

