



Electrically held lighting contactor, Contactor amp rating 30A, 0 N.C. / 4 N.O.  
Poles, 277VAC 60HZ coil, Non-combination type, (no disconnect device),  
Enclosure NEMA type 12, Dust/drip proof for indoors

|                                                                         |                                               |
|-------------------------------------------------------------------------|-----------------------------------------------|
| product brand name                                                      | Class LE                                      |
| design of the product                                                   | Electrically held lighting contactor          |
| special product feature                                                 | Compact design; Finger safe control terminals |
| <b>General technical data</b>                                           |                                               |
| weight [lb]                                                             | 18 lb                                         |
| Height x Width x Depth [in]                                             | 16 × 13 × 6 in                                |
| touch protection against electrical shock                               | NA for enclosed products                      |
| installation altitude [ft] at height above sea level maximum            | 6560 ft                                       |
| ambient temperature [°F]                                                |                                               |
| • during storage                                                        | -67 ... +176 °F                               |
| • during operation                                                      | 32 ... 104 °F                                 |
| ambient temperature                                                     |                                               |
| • during storage                                                        | -55 ... +80 °C                                |
| • during operation                                                      | 0 ... 40 °C                                   |
| country of origin                                                       | USA                                           |
| <b>Contactor</b>                                                        |                                               |
| size of contactor                                                       | 30 Amp                                        |
| number of NO contacts for main contacts                                 | 4                                             |
| number of NC contacts for main contacts                                 | 0                                             |
| operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V                                         |
| mechanical service life (operating cycles) of the main contacts typical | 10000000                                      |
| contact rating of the main contacts of lighting contactor               |                                               |
| • with electronic ballast [LED driver] (1 pole per 1 phase) rated value | 16A @120V / 8A @277V 1p 1ph                   |
| • at tungsten (1 pole per 1 phase) rated value                          | 30A @277V 1p 1ph                              |
| • at tungsten (2 poles per 1 phase) rated value                         | 30A @480V 2p 1ph                              |
| • at tungsten (3 poles per 3 phases) rated value                        | 30A @480V 3p 3ph                              |
| • at ballast (1 pole per 1 phase) rated value                           | 30A @347V 1p 1ph                              |
| • at ballast (2 poles per 1 phase) rated value                          | 30A @600V 2p 1ph                              |
| • at ballast (3 poles per 3 phases) rated value                         | 30A @600V 3p 3ph                              |
| • at resistive load (1 pole per 1 phase) rated value                    | 30A @600V 1p 1ph                              |
| • at resistive load (2 poles per 1 phase) rated value                   | 30A @600V 2p 1ph                              |
| • at resistive load (3 poles per 3 phases) rated value                  | 30A @600V 3p 3ph                              |
| <b>Auxiliary contact</b>                                                |                                               |
| number of NC contacts at contactor for auxiliary contacts               | 1                                             |
| number of NO contacts at contactor for auxiliary contacts               | 1                                             |
| number of total auxiliary contacts maximum                              | 4                                             |
| contact rating of auxiliary contacts of contactor according to UL       | A600 / Q600                                   |
| <b>Coil</b>                                                             |                                               |

|                                                                          |              |
|--------------------------------------------------------------------------|--------------|
| type of voltage of the control supply voltage                            | AC           |
| control supply voltage                                                   |              |
| • at AC at 60 Hz rated value                                             | 277 V        |
| apparent pick-up power of magnet coil at AC                              | 87 VA        |
| apparent holding power of magnet coil at AC                              | 9.4 VA       |
| operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1 |

|                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| <b>Enclosure</b>                                  |                                         |
| degree of protection NEMA rating of the enclosure | NEMA 12 enclosure                       |
| design of the housing                             | dustproof and drip-proof for indoor use |

|                                                                                                                          |                                        |
|--------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Mounting/wiring</b>                                                                                                   |                                        |
| mounting position                                                                                                        | Vertical                               |
| fastening method                                                                                                         | Surface mounting and installation      |
| type of electrical connection for supply voltage line-side                                                               | Screw-type terminals                   |
| tightening torque [lbf·in] for supply                                                                                    | 18 ... 22 lbf·in                       |
| type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded                        | 2x (16 ... 12 AWG), 2x (14 ... 8 AWG)  |
| temperature of the conductor for supply maximum permissible                                                              | 75 °C                                  |
| material of the conductor for supply                                                                                     | CU                                     |
| type of electrical connection for load-side outgoing feeder                                                              | Screw-type terminals                   |
| tightening torque [lbf·in] for load-side outgoing feeder                                                                 | 18 ... 22 lbf·in                       |
| type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded       | 2x (16 ... 12 AWG), 2x (14 ... 8 AWG)  |
| temperature of the conductor for load-side outgoing feeder maximum permissible                                           | 75 °C                                  |
| material of the conductor for load-side outgoing feeder                                                                  | CU                                     |
| type of electrical connection of magnet coil                                                                             | Screw-type terminals                   |
| tightening torque [lbf·in] at magnet coil                                                                                | 7 ... 10 lbf·in                        |
| type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded                      | 2x (20 ... 16 AWG), 2x (18 ... 14 AWG) |
| temperature of the conductor at magnet coil maximum permissible                                                          | 75 °C                                  |
| material of the conductor at magnet coil                                                                                 | CU                                     |
| type of electrical connection at contactor for auxiliary contacts                                                        | Screw-type terminals                   |
| tightening torque [lbf·in] at contactor for auxiliary contacts                                                           | 7 ... 12 lbf·in                        |
| type of connectable conductor cross-sections at contactor for AWG cables for auxiliary contacts single or multi-stranded | 2x (20 ... 16 AWG), 2x (18 ... 14 AWG) |
| temperature of the conductor at contactor for auxiliary contacts maximum permissible                                     | 75 °C                                  |
| material of the conductor at contactor for auxiliary contacts                                                            | CU                                     |

|                                                                                   |                                  |
|-----------------------------------------------------------------------------------|----------------------------------|
| <b>Short-circuit current rating</b>                                               |                                  |
| design of the fuse link for short-circuit protection of the main circuit required | 100kA@600V (Class J 40A max)     |
| design of the short-circuit trip                                                  | Thermal magnetic circuit breaker |
| maximum short-circuit current breaking capacity (Icu)                             |                                  |
| • at 240 V                                                                        | 24 kA                            |
| • at 480 V                                                                        | 65 kA                            |
| • at 600 V                                                                        | 14 kA                            |
| certificate of suitability                                                        | NEMA ICS 2; UL 508               |

|                            |  |
|----------------------------|--|
| <b>Further information</b> |  |
|----------------------------|--|

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEN02C004277B>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<https://support.industry.siemens.com/cs/US/en/ps/US2:LEN02C004277B>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:LEN02C004277B&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEN02C004277B&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:LEN02C004277B/certificate>

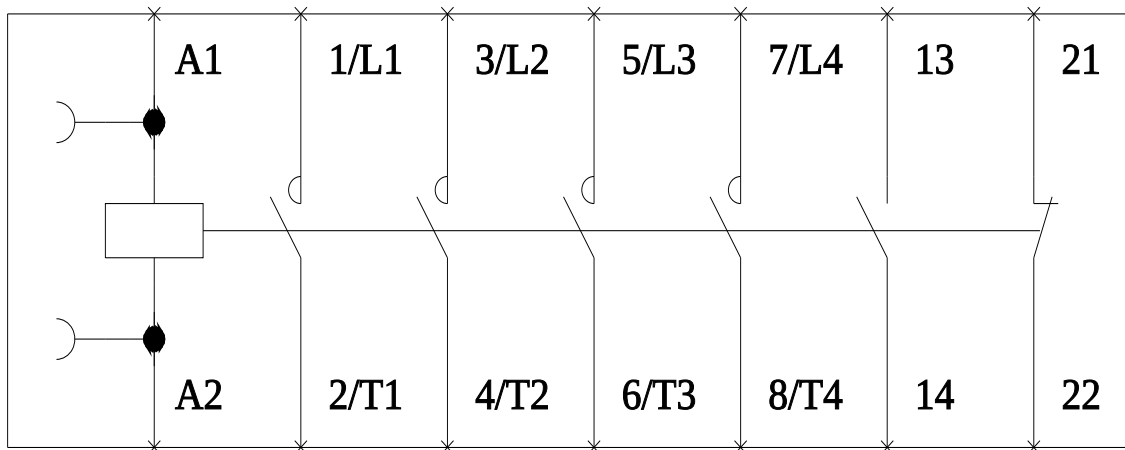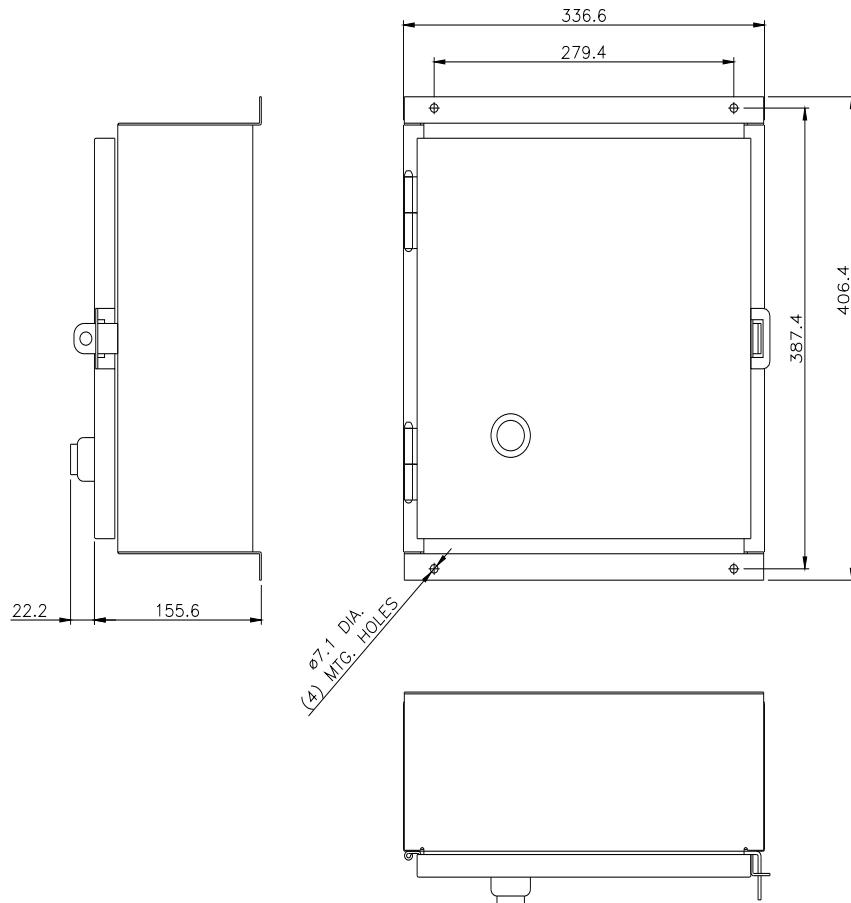

**LEN00C004 Wiring Diagram**

D38309004

