



Electrically held lighting contactor, Contactor amp rating 200A, 0 N.C. / 3 N.O.
Poles, 277VAC 60HZ coil, Non-combination type, (no disconnect device),
Enclosure NEMA type (open), No enclosure

| | |
|---|---|
| product brand name | Class LE |
| design of the product | Electrically held lighting contactor |
| special product feature | Compact design; Finger safe control terminals |
| General technical data | |
| weight [lb] | 9 lb |
| Height x Width x Depth [in] | 6.94 × 4.9 × 6.9 in |
| touch protection against electrical shock | Main circuit (not finger-safe); Control circuit (finger-safe) |
| installation altitude [ft] at height above sea level maximum | 6560 ft |
| ambient temperature [°F] | |
| • during storage | -67 ... +176 °F |
| • during operation | 32 ... 104 °F |
| ambient temperature | |
| • during storage | -55 ... +80 °C |
| • during operation | 0 ... 40 °C |
| country of origin | Germany |
| Contactor | |
| size of contactor | 200 Amp |
| number of NO contacts for main contacts | 3 |
| number of NC contacts for main contacts | 0 |
| operating voltage for main current circuit at AC at 60 Hz maximum | 600 V |
| mechanical service life (operating cycles) of the main contacts typical | 10000000 |
| contact rating of the main contacts of lighting contactor | |
| • at tungsten (1 pole per 1 phase) rated value | 200A @277V 1p 1ph |
| • at tungsten (2 poles per 1 phase) rated value | 200A @480V 2p 1ph |
| • at tungsten (3 poles per 3 phases) rated value | 200A @480V 3p 3ph |
| • at ballast (1 pole per 1 phase) rated value | 200A @347V 1p 1ph |
| • at ballast (2 poles per 1 phase) rated value | 200A @600V 2p 1ph |
| • at ballast (3 poles per 3 phases) rated value | 200A @600V 3p 3ph |
| • at resistive load (1 pole per 1 phase) rated value | 200A @600V 1p 1ph |
| • at resistive load (2 poles per 1 phase) rated value | 200A @600V 2p 1ph |
| • at resistive load (3 poles per 3 phases) rated value | 200A @600V 3p 3ph |
| Auxiliary contact | |
| number of NC contacts at contactor for auxiliary contacts | 2 |
| number of NO contacts at contactor for auxiliary contacts | 2 |
| number of total auxiliary contacts maximum | 4 |
| contact rating of auxiliary contacts of contactor according to UL | A300 / Q300 |
| Coil | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage | |

| | |
|--|---------------|
| <ul style="list-style-type: none"> • at DC rated value | 240 ... 277 V |
| <ul style="list-style-type: none"> • at AC at 50 Hz rated value | 240 ... 277 V |
| <ul style="list-style-type: none"> • at AC at 60 Hz rated value | 240 ... 277 V |
| apparent pick-up power of magnet coil at AC | 300 VA |
| apparent holding power of magnet coil at AC | 5.8 VA |
| operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1 |

| | |
|---|----------------------------|
| Enclosure | |
| degree of protection NEMA rating of the enclosure | Open device (no enclosure) |
| design of the housing | NA |

| | |
|--|-----------------------------------|
| Mounting/wiring | |
| mounting position | Vertical |
| fastening method | Surface mounting and installation |
| type of electrical connection for supply voltage line-side | Screw-type terminals |
| tightening torque [lbf-in] for supply | 90 ... 110 lbf-in |
| type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded | 2x (6 ... 3/0 AWG) |
| temperature of the conductor for supply maximum permissible | 75 °C |
| material of the conductor for supply | CU |
| type of electrical connection for load-side outgoing feeder | Screw-type terminals |
| tightening torque [lbf-in] for load-side outgoing feeder | 90 ... 110 lbf-in |
| type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded | 2x (6 ... 3/0 AWG) |
| temperature of the conductor for load-side outgoing feeder maximum permissible | 75 °C |
| material of the conductor for load-side outgoing feeder | CU |
| type of electrical connection of magnet coil | Screw-type terminals |
| tightening torque [lbf-in] at magnet coil | 7 ... 10 lbf-in |
| type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded | 2x (18 ... 14 AWG) |
| temperature of the conductor at magnet coil maximum permissible | 75 °C |
| material of the conductor at magnet coil | CU |

| | |
|---|--------------------------------------|
| Short-circuit current rating | |
| design of the fuse link for short-circuit protection of the main circuit required | none |
| design of the short-circuit trip | Thermal magnetic circuit breaker |
| maximum short-circuit current breaking capacity (Icu) | |
| <ul style="list-style-type: none"> • at 240 V | 100 kA |
| <ul style="list-style-type: none"> • at 480 V | 100 kA |
| <ul style="list-style-type: none"> • at 600 V | 25 kA |
| certificate of suitability | NEMA ICS 2; UL 508; CSA 22.2, No. 14 |

Further information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEN00F003277A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/US/en/ps/US2:LEN00F003277A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEN00F003277A&lang=en

Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:LEN00F003277A/certificate>

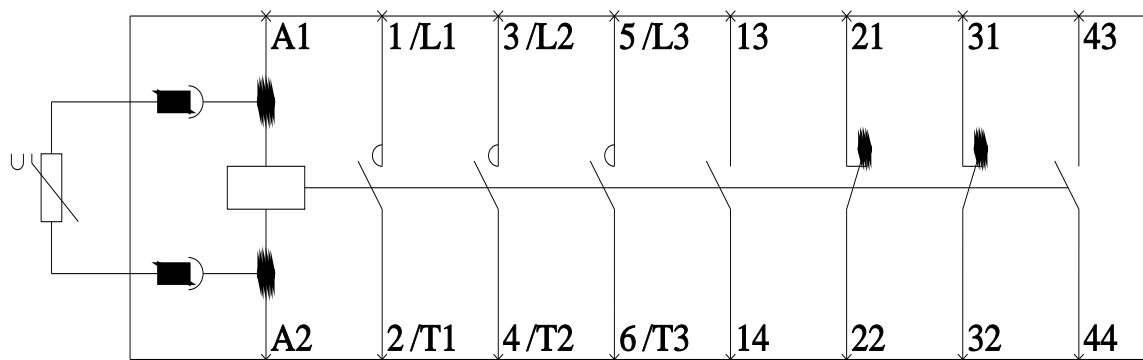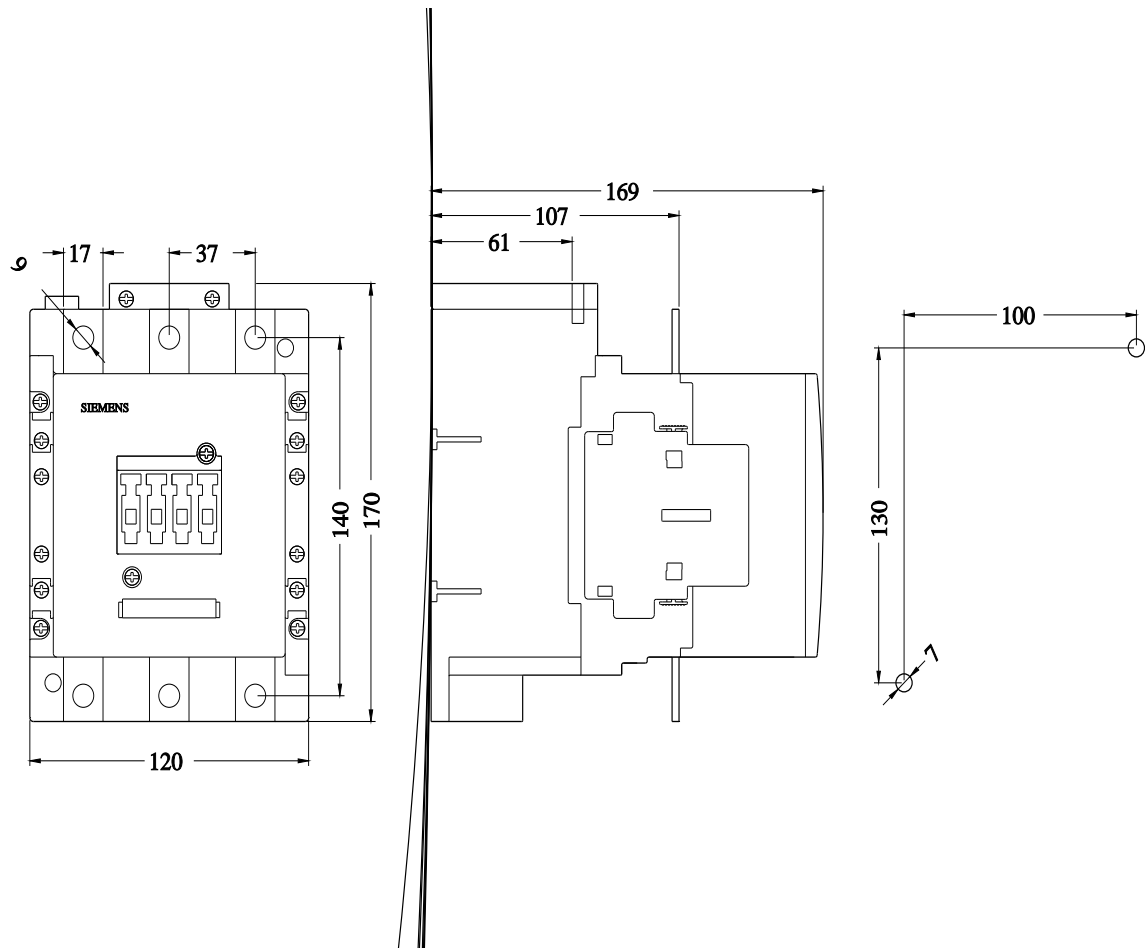

LEN00F G & H Wiring Diagram

D38309006

