

Hi-V Grade ≥ 600V







38 Series 600V·1a/2a

AEC-Q101 / Hi-Temp (105°C) Available



Features

- Contact Form 1a / 2a
- Load Voltage 600V
- Operation LED Current 3.0mA
- Load Current 80mA
- On-Resistance 40Ω
- Output Capacitance 47pF
- Low Off-State Leakage Current 1.0μA



Application


- Modem
- Telephone Equipment
- Security Equipment
- Sensing Equipment
- Automatic Test Equipment
- I/O Modules
- Electric Vehicle

PART NO	PACKAGE	PACKING
AB38	DIP-4	Tube 90pcs
AA38	DIP-6	Tube 50pcs
AC38	DIP-8	Tube 45pcs
AB38F	SMD-4	Tube 90pcs
AA38F	SMD-6	Tube 50pcs
AC38F	SMD-8	Tube 45pcs
AB38S	SOP-4	Tube 100pcs
AC38S	SOP-8	Tube 50pcs
AB38F-R1	SMD-4	
AA38F-R1	SMD-6	
AC38F-R1	SMD-8	
AB38S-R1	SOP-4	
AC38S-R1	SOP-8	
		Reel 1000pcs

* Package & PCB Layout Design, See Page 134


Terminal Identification

AB38(F)(S)



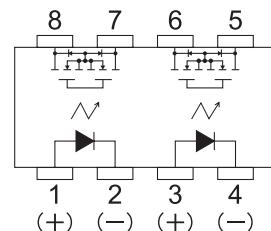
- 1:Anode (LED)
2:Cathode (LED)
3,4:Drain (MOS FET)

AA38(F)



- 1:Anode (LED)
2:Cathode (LED)
3:NC
4,6:Drain (MOS FET)
5:Source (MOS FET)

AC38(F)(S)



- 1,3:Anode (LED)
2,4:Cathode (LED)
5,6,7,8:Drain (MOS FET)

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

Absolute Maximum Ratings 絶對最大定格 (Ambient Temperature 周圍溫度 : 25°C)

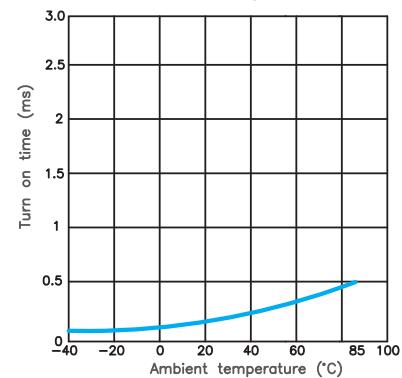
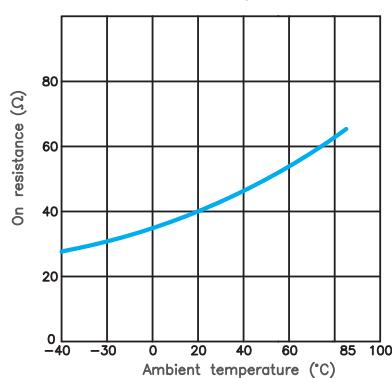
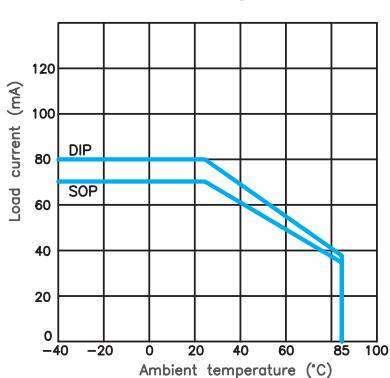
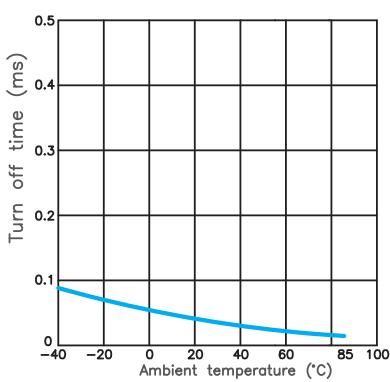
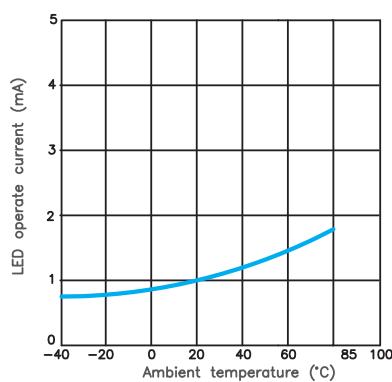
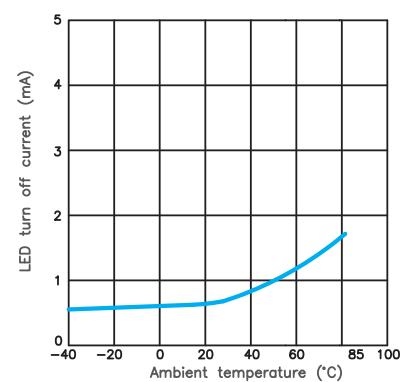
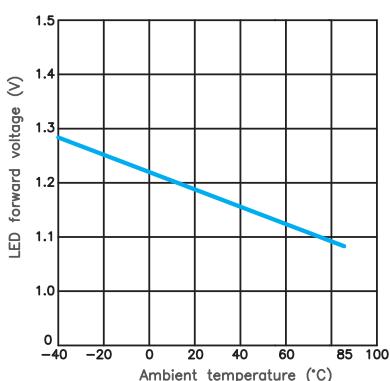
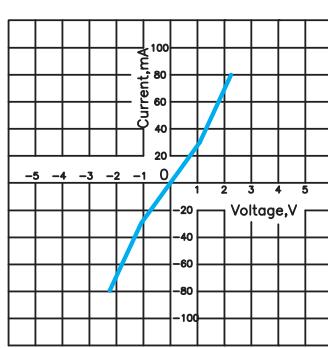
Item		Symbol	Value				
Outline Package		AB38S 1CH	AC38S 2CH	AB38(F) 1CH	AC38(F) 2CH	AA38(F) 1CH	
Input 輸入	Continuous LED Current 連續 LED 電流	I _F	50mA				
	Peak LED Current LED 峰值電流 (f=100 Hz,Duty=1%)	I _{FP}	500mA				
	LED Reverse Voltage 逆向 LED 電壓	V _R	5V				
	Input Power Dissipation 輸入損耗	P _{IN}	75mW				
Output 輸出	Load Voltage 負荷電壓	V _L	600V (AC peak or DC)				
	Load Current 負荷電流 (mA)	I _L	70	60	80	70	80
	Peak Load Current 峰值負荷電流 (1ms,1 shot) (mA)	I _{PEAK}	200	200	200	200	200
	Output Power Dissipation 輸出損耗 (mW)	P _{OUT}	300	450	450	600	450
Total Power Dissipation 全損耗 (mW)		P _T	350	500	500	650	500
I/O Breakdown Voltage 入/出力間絕緣電壓 (Vrms)		V _{I/O}	1500	1500	3750	3750	3750
I/O Breakdown Voltage 入/出力間絕緣電壓 (Suffix-H) (Vrms)		V _{I/O}	3750	3750	5000	5000	5000
Operating Temperature 使用時溫度		T _{OPR}	-40°C ~ +85°C				
Storage Temperature 保存溫度		T _{STG}	-40°C ~ +100°C				

Electrical Specifications 電性規格 (Ambient Temperature 周圍溫度 : 25°C)

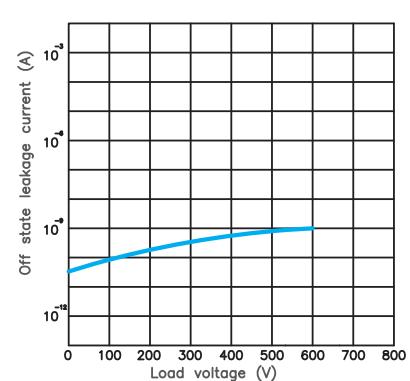
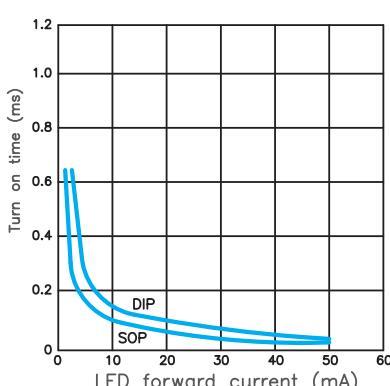
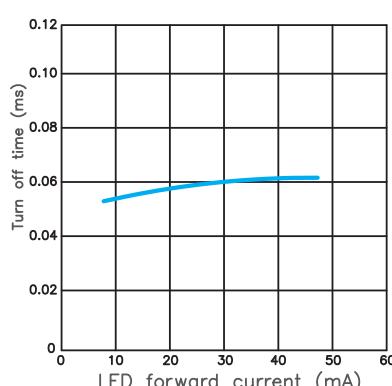
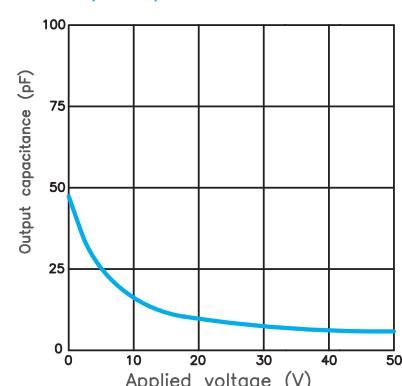
Item		Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input 輸入	LED Forward Voltage LED 順向電壓	V _F	1.0	1.17	1.5	V	I _F =10mA
	Operation LED Current LED 動作電流	I _{F ON}		1.0	3.0	mA	
	Recovery LED Voltage LED 復位電壓	V _{F OFF}	0.5	1.0		V	
Output 輸出	On-Resistance 導通電阻 Drain to Drain	R _{ON}		40	60	Ω	I _F =5mA,I _L =Rating Time to flow is within 1sec.
	Off-State Leakage Current 開路狀態漏電流	I _{LEAK}			1.0	μA	V _L =200V
	Output Capacitance 輸出端容量	C _{OUT}		47		pF	V _L =0V,f=1MHz
Transmission 傳達	Turn-On Time 動作時間	T _{ON}		0.2	0.5	ms	I _F =5mA I _L =Rating (for SOP type)
	Turn-Off Time 復位時間	T _{OFF}		0.05	0.2	ms	
	Turn-On Time 動作時間	T _{ON}		0.1	1.0	ms	I _F =10mA I _L =Rating (for DIP/SMD type)
	Turn-Off Time 復位時間	T _{OFF}		0.05	0.5	ms	
Coupled 結合	I/O Insulation Resistance 輸入 / 出間絕緣阻抗	R _{I/O}	10 ⁹			Ω	
	I/O Capacitance 輸入 / 力端靜電容量	C _{I/O}		1.3		pF	f=1MHz

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

Hi-V Grade ≥ 600VTurn on time Vs.
Ambient temperatureOn resistance Vs.
Ambient temperatureLoad current Vs.
Ambient temperatureTurn off time Vs.
Ambient temperatureLED operate current Vs.
Ambient temperatureLED Turn off current Vs.
Ambient temperatureLED forward voltage Vs.
Ambient temperatureVoltage Vs. current characteristics
of output at MOS portion

































Off state leakage current

LED forward current Vs.
turn on time characteristicsLED forward current Vs.
turn off time characteristicsApplied voltage Vs.
output capacitance characteristics

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

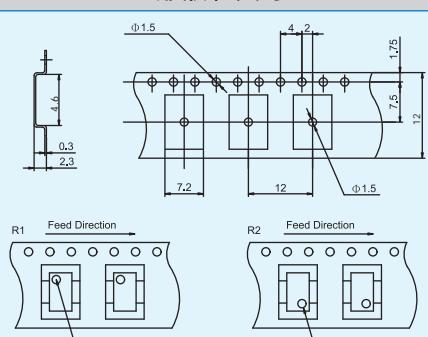
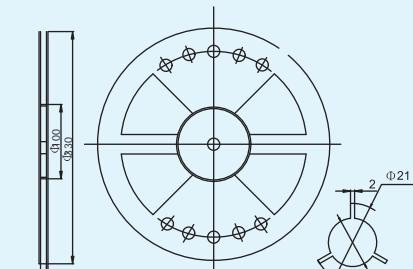
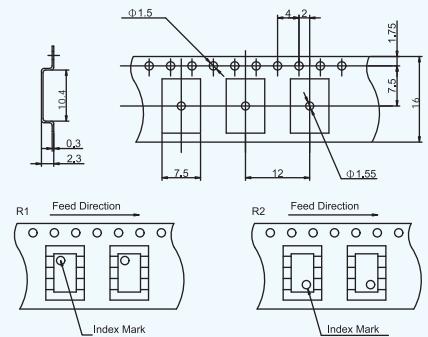
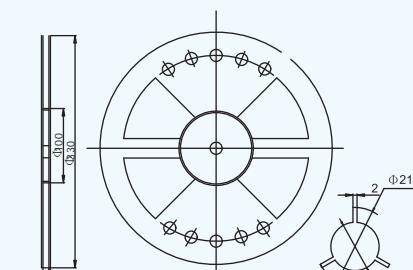
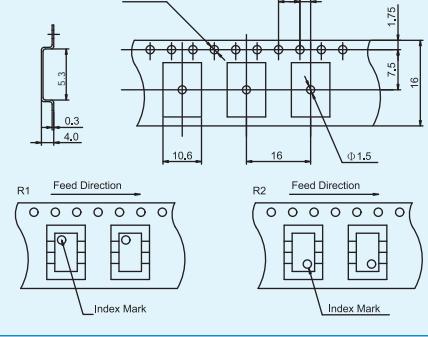
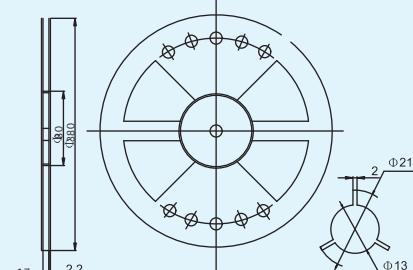
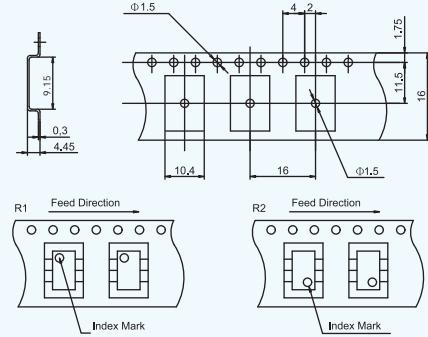
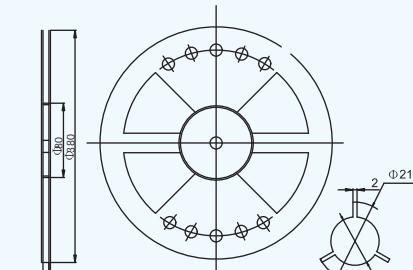
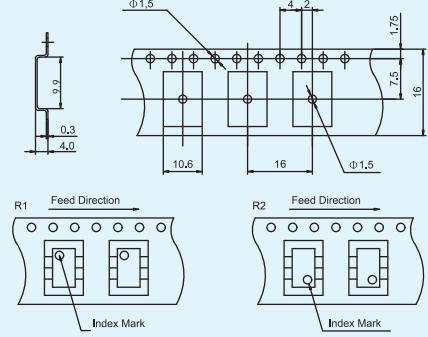
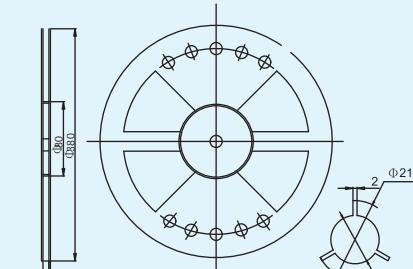
Package & PC Board Pattern

Package 包裝	Dimensions 外型尺寸圖	PC Board pattern PC 板加工圖
DIP4 	  	 (Bottom View)
SMD4 	  	 (Top View)
DIP6 	  	 (Bottom View)
SMD6 	  	 (Top View)
DIP8 	  	 (Bottom View)
SMD8 	  	 (Top View)
SOP4 	  	 (Top View)
SOP8 	  	 (Top View)

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

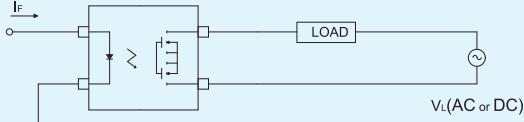
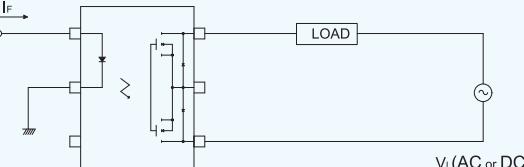
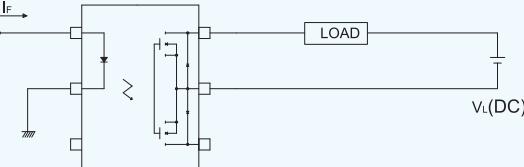
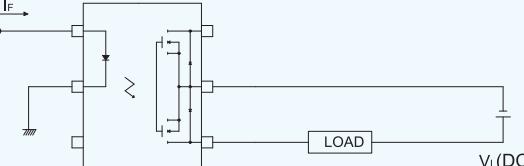
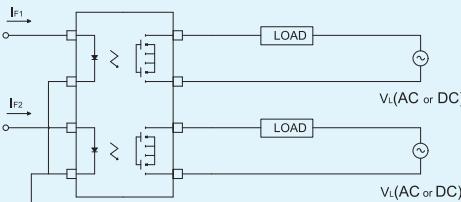
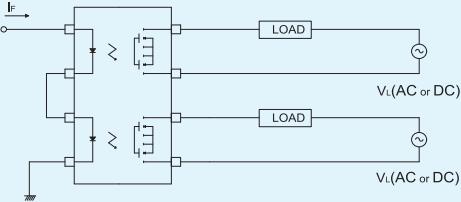
Packing Specifications

Package Type 包裝類型	Tape shape & dimensions 形狀和尺寸	Reel shape & dimensions 圓帶形狀和尺寸	Quantity 數量
4 Pin SOP			1000 pcs
8 Pin SOP			1000 pcs
4 Pin SMD			1000 pcs
6 Pin SMD			1000 pcs
8 Pin SMD			1000 pcs

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

Load Connecting Method

Type 類型	Load 負荷	Connection 接續方法	Feature 特長
4 pin	AC or DC	 I_F →	Control bi-directional signal 可控制雙向信號
A	AC or DC	 I_F →	Control bi-directional signal 可控制雙向信號
6 pin	B	 $V_L(DC)$	On-Resistance is 1/2 of A-connection 導通電阻值是 A 接法的 1/2 2-Make-contacts (Source Common)
		 $V_L(DC)$	On-Resistance is 1/2 of B-connection 導通電阻值是 B 接法的 1/2
8 pin	AC or DC	 I_{F1} → I_{F2} →	2 input and 2 output 2 入力和 2 出力回路
		 I_F →	1 input and 2 output 1 入力和 2 出力回路

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.