






Mechanically held lighting contactor, Contactor amp rating 20A, 0 N.C. / 4 N.O. poles, Non-combination type, Enclosure NEMA type (open), No enclosure

product brand name	Class CLM
design of the product	Mechanically held lighting contactor
special product feature	Energy efficient; Quiet operation
General technical data	
weight [lb]	2 lb
Height x Width x Depth [in]	7.3 × 4.3 × 3.5 in
touch protection against electrical shock	Not finger-safe
installation altitude [ft] at height above sea level maximum	6560 ft
country of origin	Mexico
Contactor	
size of contactor	20 Amp
number of NO contacts for main contacts	4
number of NC contacts for main contacts	0
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value	20A @250V 1p 1ph
• at tungsten (2 poles per 1 phase) rated value	20A @250V 2p 1ph
• at tungsten (3 poles per 3 phases) rated value	20A @250V 3p 3ph
• at ballast (1 pole per 1 phase) rated value	20A @347V 1p 1ph
• at ballast (2 poles per 1 phase) rated value	20A @600V 2p 1ph
• at ballast (3 poles per 3 phases) rated value	20A @600V 3p 3ph
• at resistive load (1 pole per 1 phase) rated value	30A @347V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
Auxiliary contact	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of total auxiliary contacts maximum	4
contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
• at AC at 50 Hz rated value	265 ... 277 V
• at AC at 60 Hz rated value	265 ... 277 V
apparent pick-up power of magnet coil at AC	600 VA
apparent holding power of magnet coil at AC	6 VA
operating range factor control supply voltage rated value of magnet coil	0.85 ... 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	Open device (no enclosure)

design of the housing	NA
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	18 ... 18 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	18 ... 18 lbf·in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	18 ... 18 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	none
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	5 kA
• at 480 V	5 kA
• at 600 V	5 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No. 14
Further information	
Industrial Controls - Product Overview (Catalogs, Brochures,...)	
www.usa.siemens.com/iccatalog	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM42071	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/US/en/ps/US2:CLM42071	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)	
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM42071&lang=en	
Certificates/approvals	
https://support.industry.siemens.com/cs/US/en/ps/US2:CLM42071/certificate	

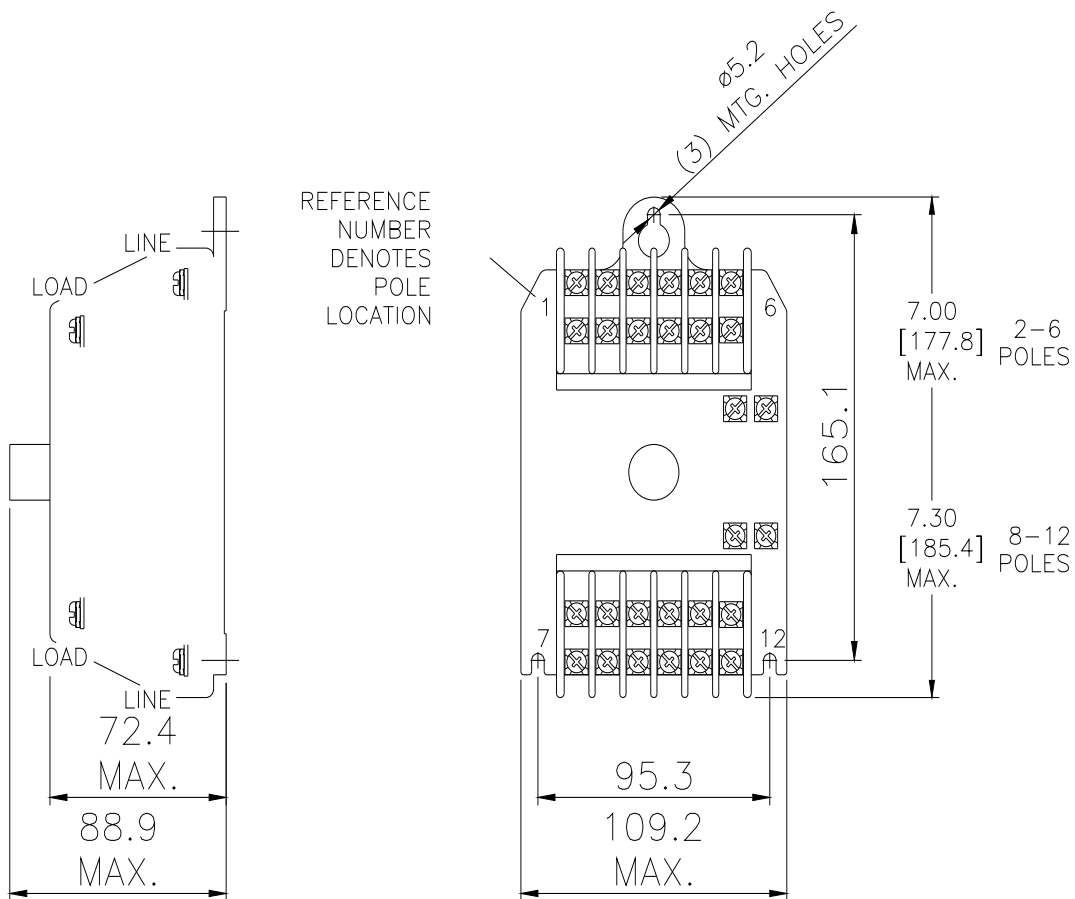

POLES	LOCATION
2	2, 3 & 4
3	2, 3 & 4
4	2, 3, 4 & 5
6	1-6
8	1-8 & 9, 10 & 11
10	1-10 & 11 & 12
12	1-12







MAIN CONTACT RATING
AC: 250V, 30A
DC: 250V, 10A

POLES TO LOAD	AMPERES
2 POLES	30
3 POLES	20
4 POLES	15
6 POLES	10
8 POLES	7.5
10 POLES	6
12 POLES	5

30 AMP. DC
GENERAL
250V DC MAX. 3 POLES IN SERIES

SWITCH IS SUITABLE FOR USE IN A CIRCUIT
CAPABLE OF DELIVERING NOT MORE THAN THE
RMS SYMMETRICAL CURRENT AT THE MAXIMUM
VOLTAGE SHOWN BELOW. WHEN PROTECTED BY
A 30 AMP. CIRCUIT BREAKER, SWITCH MAY
WITHSTAND RATING OF NOT LESS THAN
VALUES SHOWN.

MAXIMUM RMS	MAXIMUM AC
AMPERES	VOLTS
25,000	250
15,000	400
10,000	600



MODULE	TERMINAL	CONNECT TO
1	1	NOT USED
2	2	CONTROL POINT FOR ACC. 4 & 6
3	3	CONTROL POINT FOR ACC. 4 & 6
4	4	MODULE CONTROL VOLTAGE *
5	5	CONTRACTOR CONTROL VOLTAGE
6	6	TERMINAL O OR CONTRACTOR
7	7	TERMINAL C OR CONTRACTOR

* FOR 24 VDC CONTROL MODULES
CONNECT TERMINAL 4 TO NEGATIVE (-)

GENERAL NOTES

- WHEN CONTACTS ARE OPEN, VOLTAGE WILL BE INDICATED. CONTACTOR CONTROL VOLTAGE CAN BE DERIVED FROM THE LINE POLES OF THE CONTACTOR UNIT.
- MAIN CONTACTS ARE BROUGHT IN OPEN POSITION WITH CONTROL LINE TO SPRING. SEE FIG. 10 BELOW. (SWITCH RELEASED WITH CONTACTS CLOSED)
- LINE & LOAD TERMINALS ARE REVERSIBLE.
- CONTACTS ARE BROUGHT THROUGH VOLTAGE BREAK WITH MECHANICALLY INTERLOCKED SPRING COIL OPERATOR. MECHANICALLY HELD IN BOTH OPEN & CLOSED POSITIONS.
- TERMINAL CONNECTIONS TO LINE & LOAD WILL ACCEPT 30 AMP. TO 10 AMP. COIL OPERATOR. TERMINAL LINE POLE CONNECTION TO 10 AMP.
- TERMINAL CONNECTIONS TO ELECTRIC MODULES (ACC. 4, 6, 8, 10, 12) WILL ACCEPT NO. 22 AWG TO 24 AWG COPPER WIRE. TORQUE CONTACT TERMINALS TO 22 in. lb.
- CONTROL MODULE VOLTAGE SUPPLIED BY CUSTOMER.

24306100401

last modified:

4/27/2021

