


RER-J2C-XXXX

RER Series industrial Relay

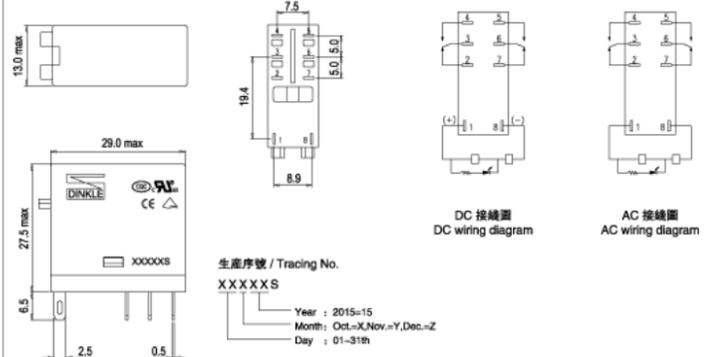

Part Number Description

RER-J2C-XXXX

- ① J = Spec.
- ② 2C = No. of contacts
- ③ XXXX = Voltage
 - D24 = DC24V
 - A120 = AC120V
 - A230 = AC230V

Specification

Coil Characteristics			
Rated voltage	24VDC	120VAC	230VAC
Rated current	21.8mA	7.6mA	3.9mA
Coil resistance	1100Ω±10%	6300Ω±10%	23500Ω±10%
Pull-in voltage (at 23°C)	18V(≤Rated voltage 75%)	96V(≤Rated voltage 80%)	184V(≤Rated voltage 80%)
Drop-out voltage (at 23°C)	2.4V(≥Rated voltage 10%)	36V(≥Rated voltage 30%)	69V(≥Rated voltage 30%)
Max. Allowable voltage (at 23°C)	26.4V(Rated voltage 110%)	132V(Rated voltage 110%)	253V(Rated voltage 110%)
Coil power consumption	0.53W	1.0VA	1.0VA
LED Status display	Green/DC	Red/AC	Red/AC
Contact Characteristics			
No. of contacts	2C		
Resistive load (AC-1)	5A/250VAC · 30VDC		
Motor load (AC-15)	1/6HP 240VAC		
Operating power (resistive)	1250VA · 150W		
Min. allowable load	10mA/17V		
Contact material	AgSnO ₂		
Contact resistance	50mΩ		
Dielectric Strength			
Between adjacent contacts	1000VAC/1min		
Between open contacts / between live parts and ground	1000VAC/1min		
Between contact and coil	5000VAC/1min		
Insulation resistance	1000MΩ (500VDC)		
General Characteristics			
Operate time (rated voltage)	≤20ms		
Release time (rated voltage)	≤20ms		
Operating frequency	18000 Ops/h		
Ambient temperature	-40~+55°C (Non-freezing condition)		
Ambient humidity	35%~85%RH		
Atmospheric pressure	86~106KPa		
Impact resistance	10G		
Vibration resistance	10~55Hz		
Electrical life (frequency: on for 1s, off for 1s)	≥10 ⁵ frequency (1800 Ops/h)		
Mechanical life (frequency: 300 cycles/1 min)	≥10 ⁷ frequency (18000 Ops/h)		
Weight per piece	About 19g		

Relay Base and Accessories

Part Number	Product Description	Number of Packages	Specification
RER-J2C-XXXX	2C, 5A, with indicator and control button	20	--
0149-30-08A	Screw connection relay base,DIN rail mounting	10	RER-J2C-XXXX
0149-33-08E	Clamping connection relay base,DIN rail mounting	10	RER-J2C-XXXX
0149-32	Pastic retaining clip	10	0149-33-05E
0149-36	6~250VDC Volt.suppression component	10	0149-33-05E
0149-35-24	6-24VAC / DC LED indicator	10	0149-33-05E
0149-35-240	110-240VAC / DC LED indicator	10	0149-33-05E