


R2016-50.000-8-F-1020-TR


SPECIFICATIONS

PARAMETER	VALUE		
NOMINAL FREQUENCY	50.000 MHz		
MODE OF OSCILLATION	Fundamental		
FREQUENCY TOLERANCE AT 25°C	±10 ppm max		
FREQUENCY STABILITY OVER TEMPERATURE	±20 ppm max		
OPERATING TEMPERATURE RANGE	0°C to +70°C		
STORAGE TEMPERATURE RANGE	-40°C to +85°C		
AGING	±2 ppm first year max		
LOAD CAPACITANCE	8 pF		
EQUIVALENT SERIES RESISTANCE	60 Ω max		
SHUNT CAPACITANCE	3.5 pF max		
DRIVE LEVEL	100 μW max		
REFLOW CONDITIONS	260°C for 10 sec max		

MECHANICAL SPECIFICATION

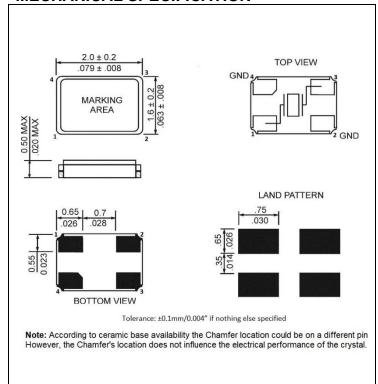

CARRIER TAPE DIMENSIONS

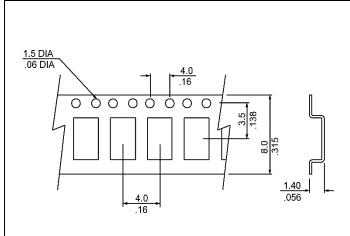

NOTE: REFER TO EIA-481 FOR DIMENSIONS

PACKAGING


178 mm REEL DIAMETER 8 mm TAPE WIDTH, 4 mm PITCH QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481



R2016-50.000-8-F-1020-TR

REFLOW PROFILE

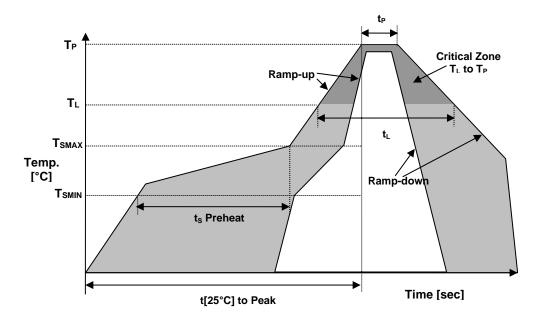

Reflow profile				
Temperature Min Preheat	T _{SMIN}	150°C		
Temperature Max Preheat	T _{SMAX}	200°C		
Time (T _{SMIN} to T _{SMAX})	ts	60-180 sec.		
Temperature	T_L	217°C		
Peak Temperature	T_P	260°C		
Ramp-up rate	R _{UP}	3°C/sec max.		
Ramp-down rate	R_{DOWN}	6°C/sec max.		
Time within 5°C of Peak Temperature	t _P	10 sec.		
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.		
Time	t_L	60-150 sec.		

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au







R2016-50.000-8-F-1020-TR

MARKING

R50.0 x8Eyw

x – Internal Production ID code

y – Year code

w – Week code

YEAR CODE		
Year	Code	
2015	5	
2016	6	
2017	7	
2018	8	
2019	9	
2020	0	
2021	1	
2022	2	
2023	3	
2024	4	
2025	5	

	ALPHA WEEK CODE TABLE				
Week	Code	Week	Code	Week	Code
1	a	19	S	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	О
6	f	24	X	42	P
7	g	25	У	43	Q
8	h	26	Z	44	R
9	i	27	A	45	S
10	j	28	В	46	T
11	k	29	C	47	U
12	1	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	0	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

APPROVAL

DRAWN BY:	CP, September 28, 2020	
APPROVED BY:	JI, September 28, 2020	
REVISION:	A, Initial Release	
REVISION.	AR, February 17, 2021	

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not sasume any liability arising lability arising labi

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.