
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | REV. | REV. |

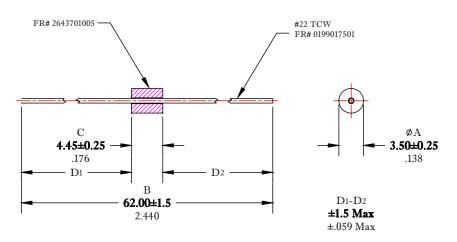

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)	
25 MHz	100 MHz
39 Min.	54.4 Min.

DIMENSIONS BOLD NUMBERS ARE IN MILLIMETERS

LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF **25.4mm** [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

FAIR-RITE PRODUCTS CORP.

TITLE BEAD-ON-LEAD ASSEMBLY

DRAWN BY DATE 12/26/2019 SIZE PART NO. REV.
CHKD BY B 2743001112 ~

APPRVD BY SCALE: NONE SHEET 1 OF 1

FR# 43