
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | REV. | ~

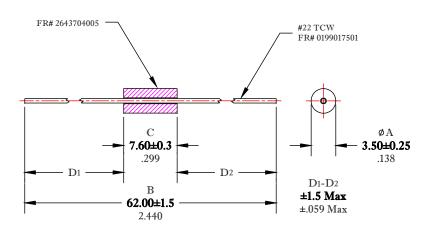

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)						
25 MHz	100 MHz					
60 Min.	88 Min.					

DIMENSIONS BOLD NUMBERS ARE IN MILLIMETERS LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF 25.4mm [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS-296-F STANDARDS.

BEAD-ON-LEAD ASSEMBLY								
DRAWN BY	DATE 12/27/2019	SIZE	PAR	RT NO.				REV.
CHKD BY	12/2//2019	В	2	743	0	041	12	\sim
APPRVD BY		SCA	LE:	NONE		SHEE	T 1 0	F 1

FR# 43