
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | REV. | ~

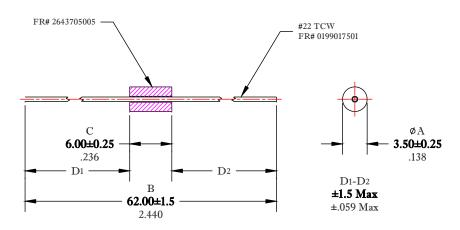

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)							
25 MHz	100 MHz						
48 Min.	72.8 Min.						

DIMENSIONS

BOLD NUMBERS ARE IN MILLIMETERS

LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF 25.4mm [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELD PER IEC 60286-1 & EIA RS296-F STANDARDS.

BEAD-ON-LEAD ASSEMBLY									
DRAWN BY D. FOOTE	DATE 12/27/2019	SIZE	PAF	RT NO.				REV.	
CHKD BY	, ,	В	2	743	O(051	12	\sim	
APPRVD BY		SCA	LE:	NONE		SHEE	T 1 0	F 1	

FR# 43