
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

 REV.

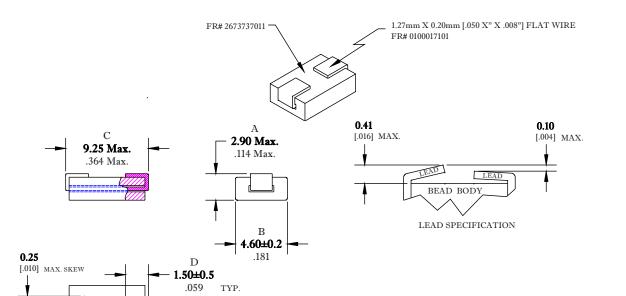

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)				
25 MHz	100 MHz			
45 Min.	76 Min.			

DIMENSIONS

NOTES:

BOLD NUMBERS ARE IN MILLIMETERS

LIGHT NUMBERS ARE IN INCHES

- 1 WIRE IS OXYGEN FREE, HIGH CONDUCTIVITY COPPER.
- 2 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, FOR SOLDERABILITY.
- 3 THIS PART MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT SHIELD BEADS.
- 4 PART MEETS FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.
- 5 IMPEDANCE MEASURED ON A HP4191A, USING A 16092A TEST FIXTURE.
- 6 THIS PART IS SUPPLIED TAPED AND REELED

FA	AIR-F	RITE	. F	PRODU	CTS	COF	RP.
TITLE WIDE BODY SURFACE MOUNT B					BEAD		
DRAWN BY		SIZE	PAF	RT NO.			REV.
CHKD BY		В	2743037447			2	
APPRVD BY		SCA	F٠	NONE	SHEE	T 1 0	F 1

FR# 43