
\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | REV. | ~

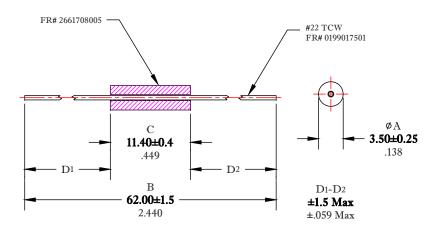

## **ELECTRICAL SPECIFICATIONS**

IMPEDANCE (OHMS)		
100 MHz	250 MHz	500 MHz
108 Min.	145 Min.	164 Min.

## DIMENSIONS

## **BOLD NUMBERS ARE IN MILLIMETERS**

LIGHT NUMBERS ARE IN INCHES

## NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4191A, USING A 16092A TEST FIXTURE, WITH COMPENSATION, AND A WIRE LENGTH OF 25mm [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

FAIR-RITE PRODUCTS CORP.

TITLE BEAD-ON-LEAD ASSEMBLY

DRAWN BY DATE 12/31/2019 SIZE PART NO. REV.
CHKD BY B 2761008112 ~

APPRVD BY SCALE: NONE SHEET 1 OF 1

FR# 61