
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

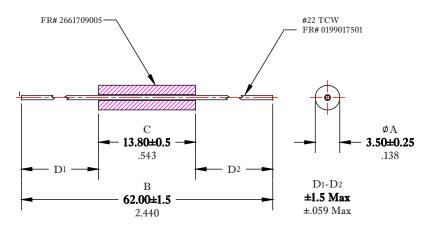

DIMENSIONS BOLD NUMBERS ARE IN MILLIMETERS LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

IMPE	IMPEDANCE (OHMS)			
100 MHz	250 MHz	500 MHz		
130 Min.	175 Min.	197 Min.		

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4191A, USING A 16092A TEST FIXTURE, WITH COMPENSATION, AND A WIRE LENGTH OF 25mm [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED

	FAIR-I	RITE	PRODUCTS COF	RP.		
BEAD-ON-LEAD ASSEMBLY						
D. FOOT	DATE E 12/31/2019	SIZE	PART NO.	REV.		
CHKD B	(] B	2761009112	\sim		

FR# 61

APPRVD BY

SCALE: NONE

SHEET 1 OF 1