
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | ~

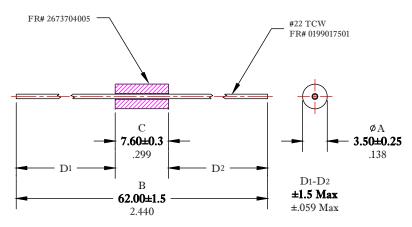

DIMENSIONS

BOLD NUMBERS ARE IN MILLIMETERS

LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF 1".
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

ELECTRICAL SPECIFICATIONS

1	IMPEDANC	NCE (OHMS)		
	10 MHz	25 MHz		
	64 Min.	79.2 Min.		

BEAD-ON-LEAD ASSEMBLY									
DRAWN BY	DATE 12/31/2019	SIZE PART NO.			REV.				
D. FOOTE	12/31/2019	В	2773004112			~			
APPRVD BY		SCALE: NONE SHEET 1 O				F 1			

FR# 73