
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | ~

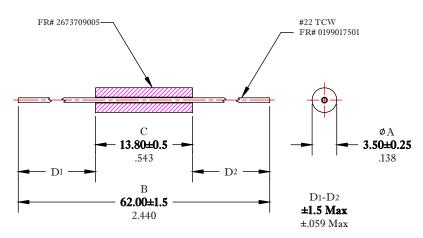

DIMENSIONS BOLD NUMBERS ARE IN MILLIMETERS LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF 25.4mm [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)								
10 MHz	25 MHz							
121 Min.	136 Min.							

TITLE	TITLE BEAD-ON-LEAD ASSEMBLY									
DRAWN BY	DATE 1/2/2020	SIZE	PAF	RT NO.				REV.		
CHKD BY	, , , , , , ,	В	2773009112			\sim				
APPRVD BY		SCALE: NONE SHEET 1 O					F 1			

FR# 73