


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2944777741	~

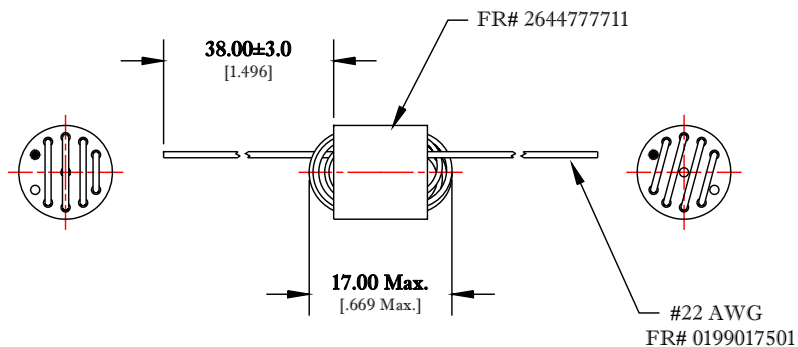

DIMENSIONS  
BOLD NUMBERS ARE IN MILLIMETERS  
LIGHT NUMBERS ARE IN INCHES

## ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
10 MHz	50 MHz	100 MHz
700 Min.	1400 Min.	1000 Min.

LEAD LENGTHS TRIMMED TO 1/2" FROM CORE  
TESTED WITH 4-1/2 TURNS OF #22 AWG

## NOTES:

- 1 - CHIPS, CRACKS, AND APPREARANCE TO MEET FAIR-RITE VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - IMPEDANCE MEASURED ON AN E991A USING A 16092A TEST FIXTURE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 5 - WIRE LOOPS SHOULD BE UNIFORM IN LENGTH.

FR# 44

FAIR-RITE PRODUCTS CORP.				
TITLE WOUND BEAD				
DRAWN BY D. FOOTE	DATE 10/23/2019	SIZE B	PART NO. 2944777741	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	