



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

779 MHz Ceramic Bandpass Filter

Part Number: AM779B1192



Electrical specifications

Center Frequency: 779 MHz

Bandwidth: F0 +/- 9MHz

Insertion Loss: 2.0 dB max

Ripple in BW: 0.7 dB max

VSWR: 1.5 : 1

Rejection: 50dB min at 1077.2 - 1095.2MHz

Input / Output Impedance: 50 Ohms

Power Handling: 2 W

Mechanical

Mounting Method: SMT

Dimensions: 17 x 13 x 5.5 mm

Environmental

Operating Temperature: -20 C to +70 C


Storage Temperature: -50 C to +90 C

Shock: 10 G. 11ms

Vibration: 10 G. 5 to 200 Hz

This product is RoHs compliant.

Outline Drawing:

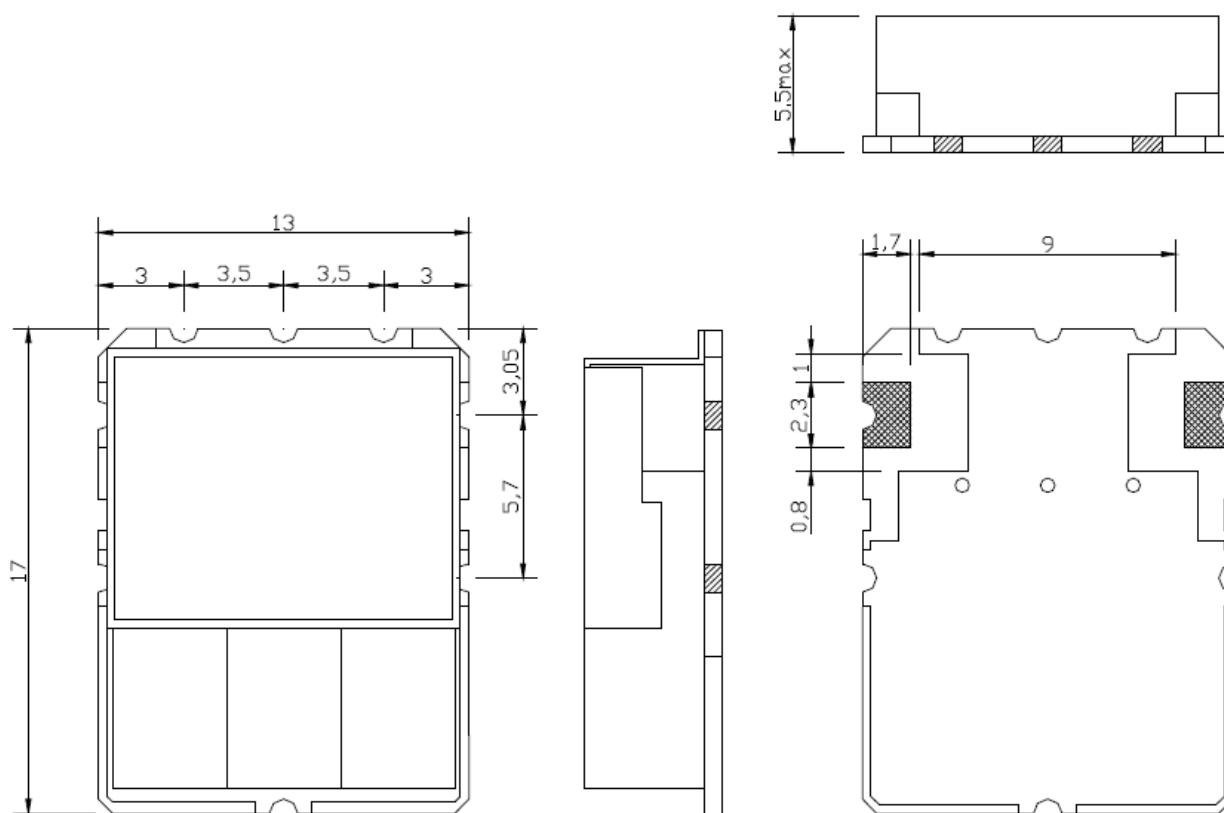

UNIT:mm

TOLERANCE:±0.3

DS-B1192-02092015-Rev0




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

779 MHz Ceramic Bandpass Filter

Part Number: AM779B1192



Response Plot:

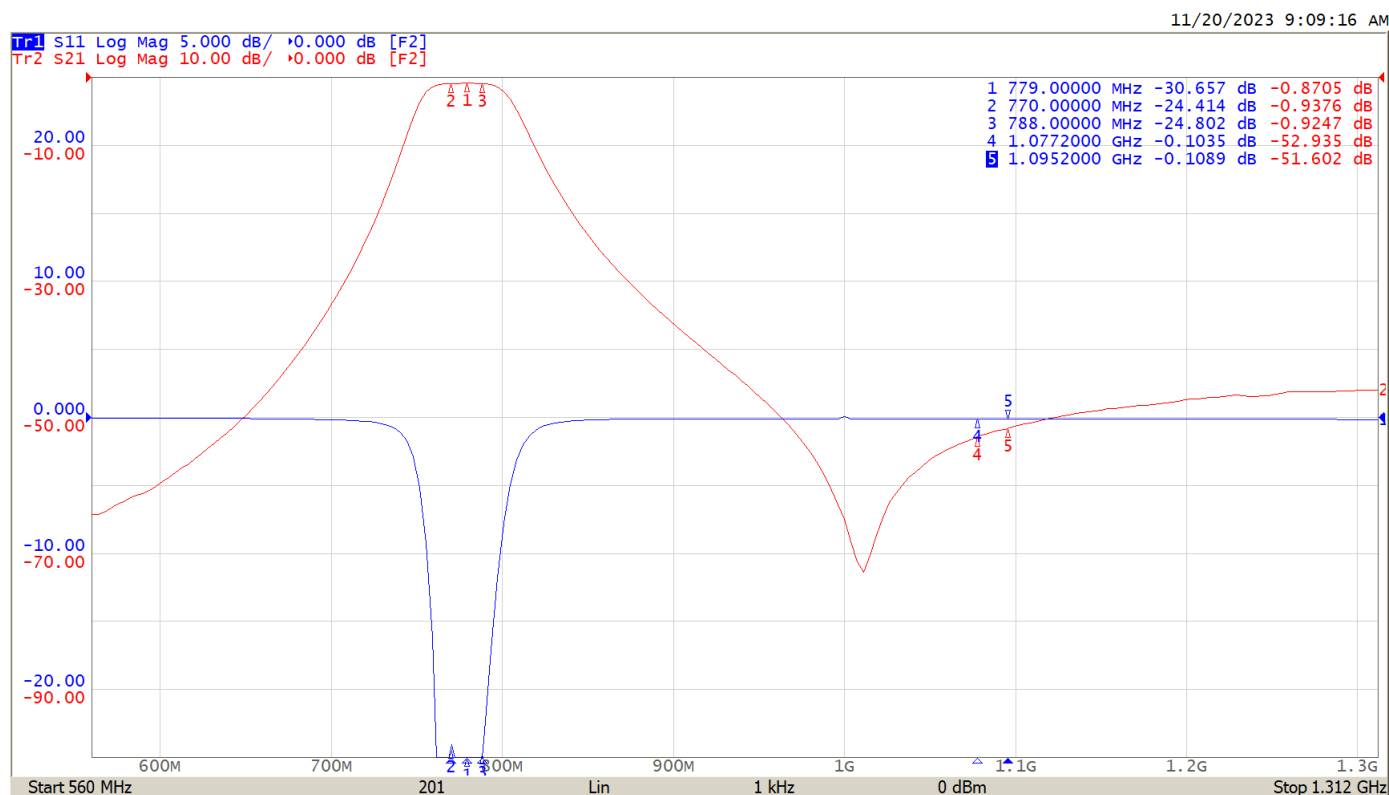

DS-B1192-02092015-Rev0