




SPECIFICATION SHEET

SPECIFICATION SHEET NO.	Q0715-SBF1G57542S473
DATE	July 15, 2023
REVISION	A0
DESCRIPTION	<p>SMD SAW Filter L3.8*W3.8*H1.50mm 3838 Type 6 Pads SBF Series</p> <p>1.575420GHz, Insertion Loss: 1.0 dB Typical</p> <p>Bandwidth: 32.64MHz</p> <p>Operating Temp. Range -40°C ~+85°C,</p> <p>Reflow Profile Condition 260 °C Max. Tape/Reel, 1000pcs/Reel</p> <p>RoHS/RoHS III compliant</p>
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	TGS SBF 1.57542GA TLF
PART CODE	SBF1G57542S473

VENDOR APPROVE			
Issued/Checked/Approved			
DATE: July 15, 2023			

CUSTOMER APPROVE	
DATE:	
7/17/2023	

SMD SAW FILTER 3838 TYPE SBF SERIES

MAIN FEATURE

- SMD SAW Filter L3.8*W3.8*H1.50mm 3838 Type 6 Pads
- Low-loss SAW Components
- Low Amplitude Ripple
- Sharp Rejection As Both Out-bands
- Usable Passband 32.64MHz
- Package code DCC6
- Electronic Sensitive Device (ESD)
- Cross More Competitors Part
- RoHS/RoHS III Compliant



APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

PART CODE GUIDE

RFQ

[Request For Quotation](#)

SBF	1G57542	S	473
1	2	3	4

1) SBF: SMD SAW Filter L3.8*W3.8*H1.50mm 3838 Type 6 Pads SBF Series

2) 1G57542: Frequency range code for 1.5754200GHz


3) S: SMD type, Package Tape/Reel,

4) 473: Internal code (A~Z or 1~9 or Blank) for custom specification

SMD SAW FILTER 3838 TYPE SBF SERIES

DIMENSION (Unit: mm, Tol.: +/-0.15mm)

Image for reference



Marking


Line 1: Internal code

Line 2: ● Pin 1 + Special code

SBF series

L3.8*W3.8*H1.50mm


3838 Type

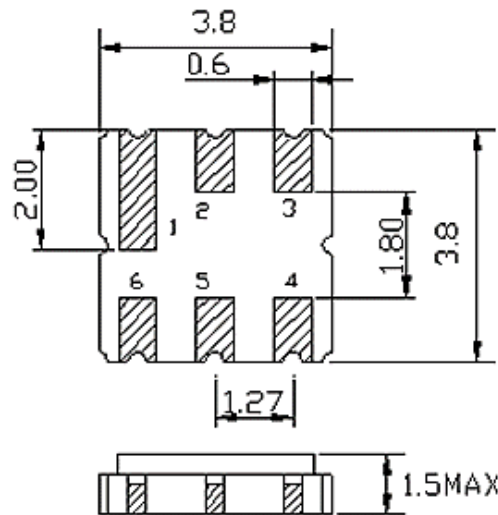

Pin	Configuration
2	Input
5	Output
1,3,4,6	Case Ground

Test Circuit

(Bottom View)

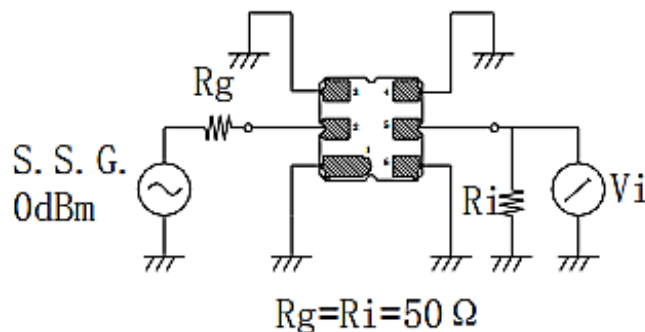

SMD SAW FILTER 3838 TYPE SBF SERIES
ELECTRICAL PARAMETERS


Parameter		Part No. Symbol	Units	Value		
				Min.	Typical	Max.
Original Manufacturer		TGS		TGS Crystals		
Holder Type		SBF		SMD SAW Filter, L3.8*W3.8*H1.50mm 3838 Type 6 Pads		
Center Frequency (fc)		1.57542G	GHz	1.5754200		
DC Voltage (VDC)		A	V		5.0	
Operation Temperature Range (T)			°C	-40		+85
Storage Temperature Range (Tstg)			°C	-40		+85
RF Power Dissipation (P)			dBm		20	
Insertion Loss (Min.) (IL)			dB		1.0	2.0
Insertion Loss 1559.10-1591.74MHz (IL)			dB		2.0	3.0
Amplitude Ripple(p-p) 1559.10-1591.74MHz (Δα)			dB		1.0	1.5
Bandwidth			MHz		32.64	
Group Delay Ripple 1559.10-1591.74MHz (GDR)			ns		15.0	35.0
Amplitude Consistency			dB		/	
Aging (Absolute Value during the First Year)			ppm/y		≤±10	
Input VSWR 1559.10-1591.74MHz					1.6:1.0	2.0:1.0
Output VSWR 1559.10-1591.74MHz					1.6:1.0	2.0:1.0
Absolute Attenuation (α)	DC - 1500.00 MHz		dB	30.0	35.0	
	1610.00-1650.00 MHz			30.0	32.0	
	1650.00-3000.00 MHz	25.0		28.0		
Package		T		Tape/Reel		
RoHS Status		LF		RoHS III compliant		
Add Value				Blank: N/A		
Internal Control Code				Blank: N/A		

Electronic Characteristics: 1) Test Temperature: 25°C \pm 2°C 2) Terminating source impedance: 50 Ω 3) Terminating load impedance: 50 Ω


7/17/2023

SMD SAW FILTER 3838 TYPE SBF SERIES

FREQUENCY CHARACTERISTICS

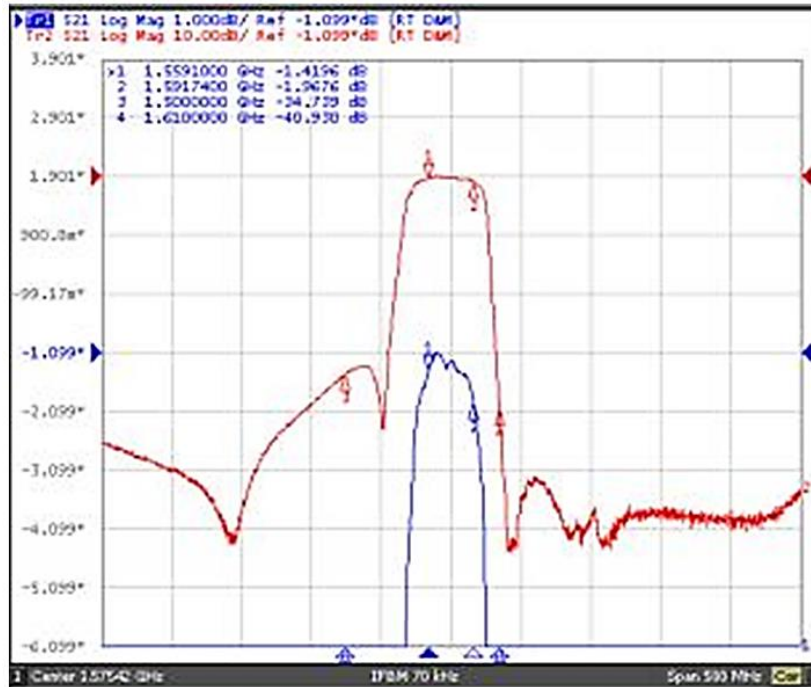


Frequency Response

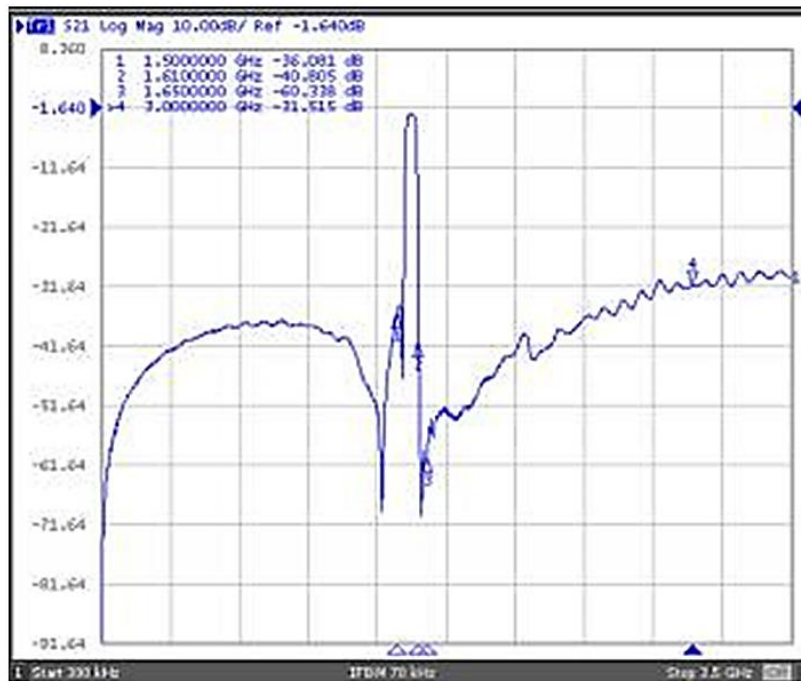


Frequency Response (wideband)

SMD SAW FILTER 3838 TYPE SBF SERIES

FREQUENCY CHARACTERISTICS

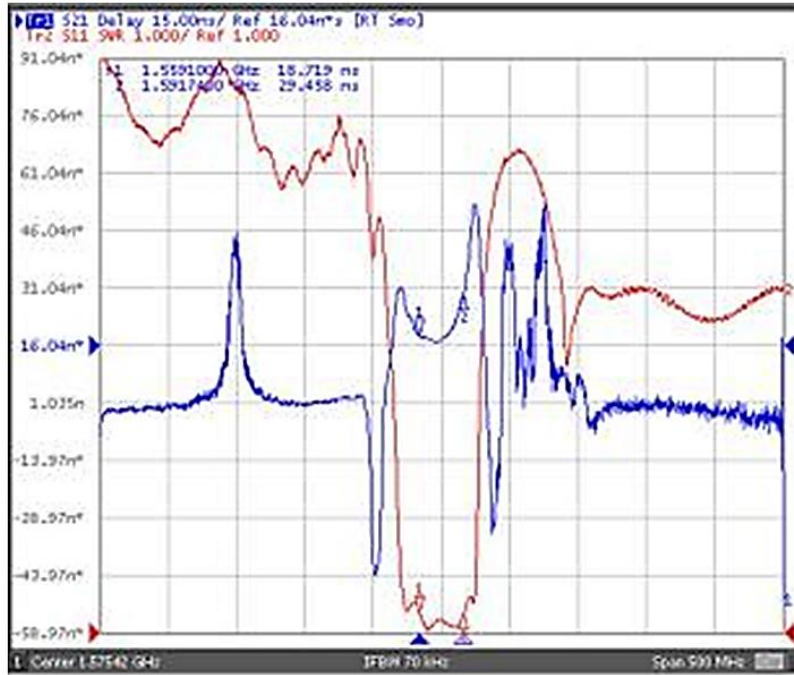


Delay Ripple & S11 VSWR

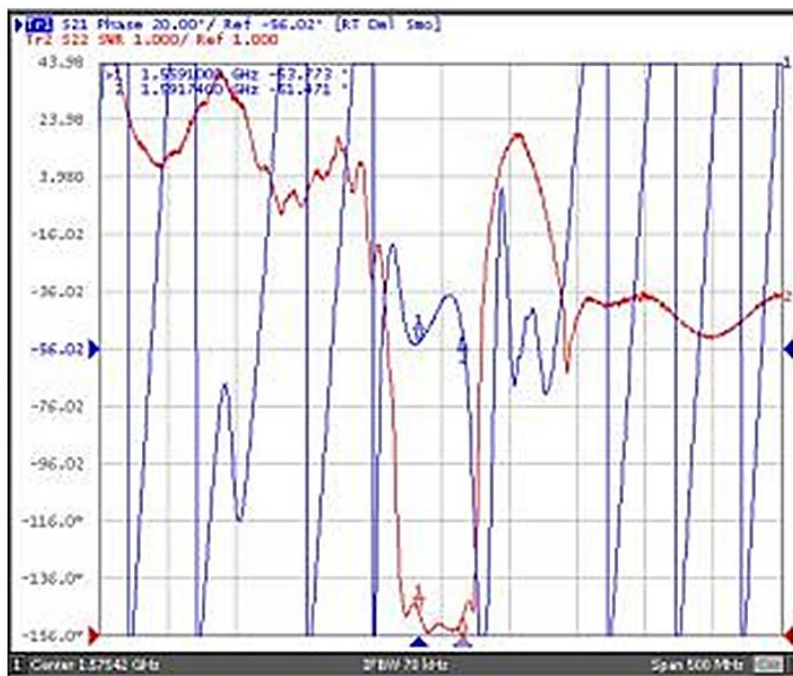


Phase Linearity & S22 VSWR

SMD SAW FILTER 3838 TYPE SBF SERIES

FREQUENCY CHARACTERISTICS

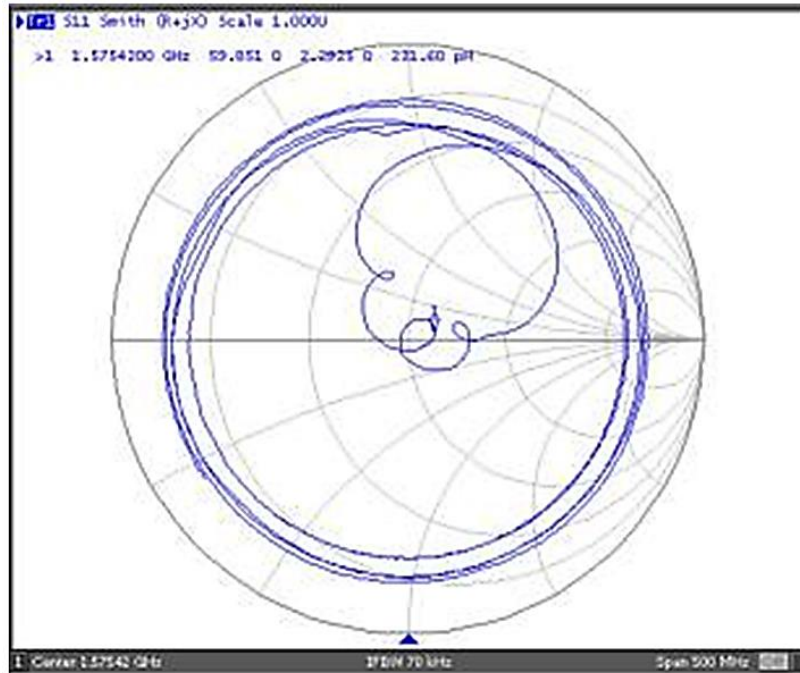

S11 Smith Chart

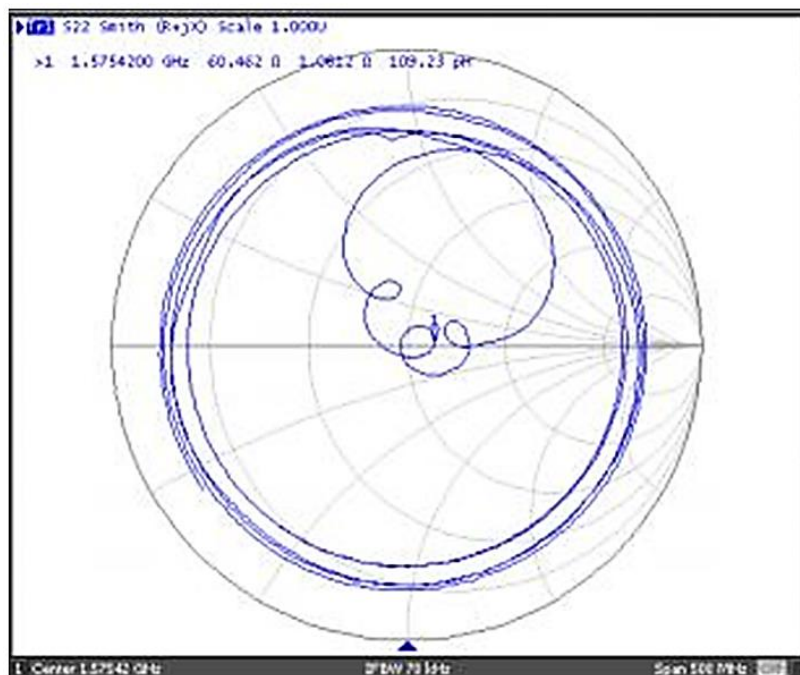

S22 Smith Chart


SMD SAW FILTER 3838 TYPE SBF SERIES

RELIABILITY

Test Items	Test Method And Conditions	Requirement
Temperature Storage	(1) Temperature: $85^{\circ}\text{C}\pm 2^{\circ}\text{C}$, Duration: 250h , Recovery time: $2\text{h}\pm 0.5\text{h}$ (2) Temperature: $-55^{\circ}\text{C}\pm 3^{\circ}\text{C}$, Duration: 250h ,Recovery time: $2\text{h}\pm 0.5\text{h}$	It shall remain electrical performance after tests
Humidity Test	Conditions: $60^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 90~95% RH Duration: 250h	
Thermal Shock	Heat cycle conditions: $\text{TA}=-55^{\circ}\text{C}\pm 3^{\circ}\text{C}$, $\text{TB}=85^{\circ}\text{C}\pm 2^{\circ}\text{C}$, $\text{t1}=\text{t2}=30\text{min}$, Switch time: $\leq 3\text{min}$, Cycle time: 100 times, Recovery time: $2\text{h}\pm 0.5\text{h}$.	
Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude:1.5mm Directions: X,Y and Z Duration: 2h	
Drop Test	Cycle time: 10 times Height: 1.0m	
Solderability	Temperature: $245^{\circ}\text{C}\pm 5^{\circ}\text{C}$ Duration: 3.0s--5.0s Depth: DIP--2/3 , SMD--1/5	
Resistance to Soldering Heat	(1)Thickness of PCB:1mm , Solder condition: $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$, Duration: $10\pm 1\text{s}$ (2)Temperature of Soldering Iron: $350^{\circ}\text{C}\pm 10^{\circ}\text{C}$, Duration: 3~4s , Recovery time : $2 \pm 0.5\text{h}$	



SMD SAW FILTER 3838 TYPE SBF SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

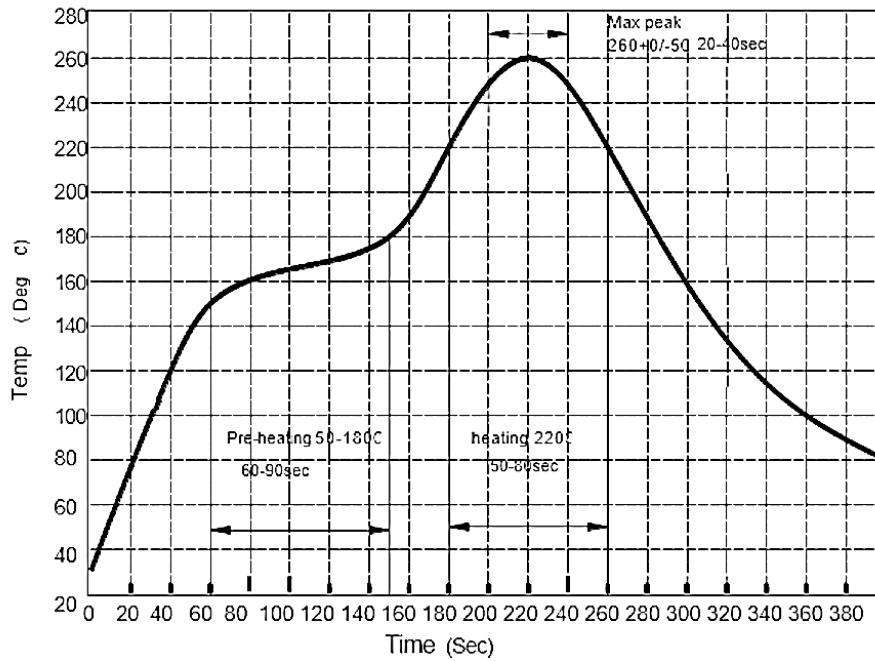


SMD SAW FILTER 3838 TYPE SBF SERIES

TAPE DIMENSION (Unit: mm, 1000pcs/Reel)

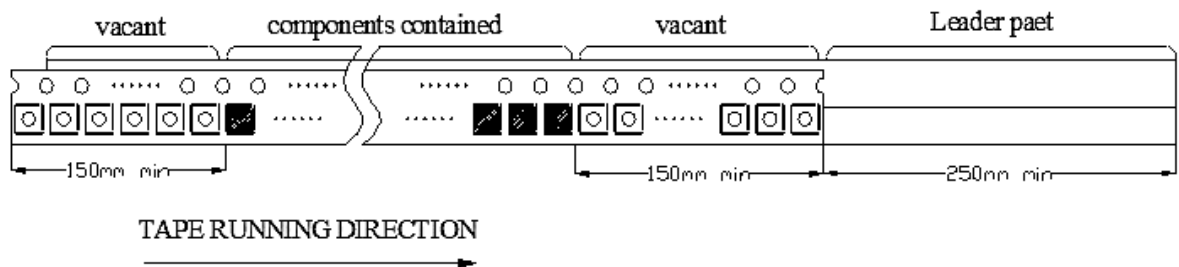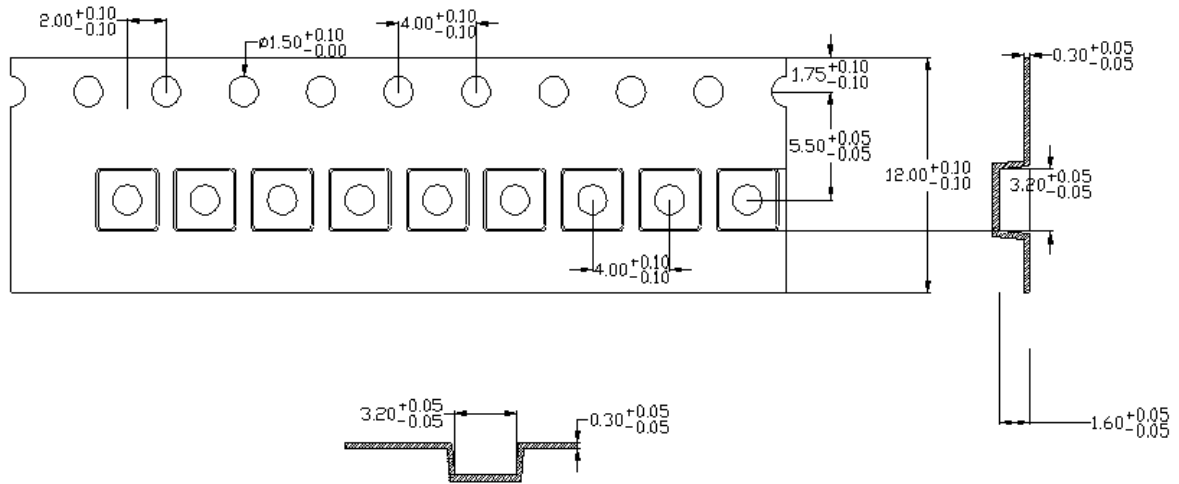

REEL DIMENSION (Unit: mm)

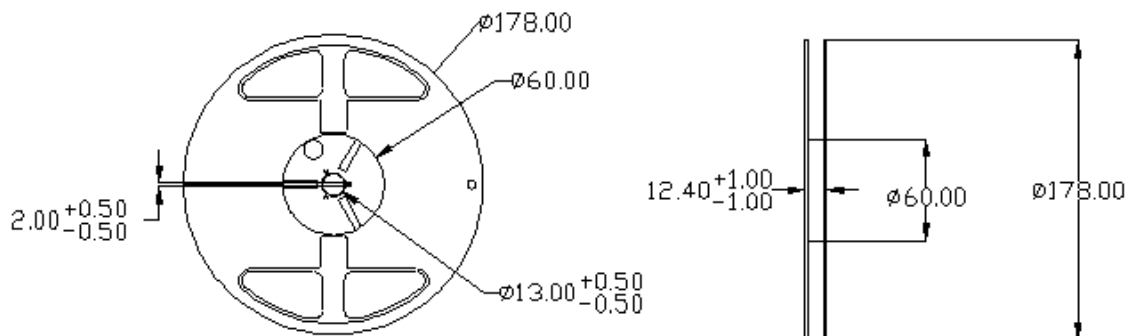

SMD SAW FILTER 3838 TYPE SBF SERIES

CAUTION

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
2. Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may be soldered. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
6. The temperature of manual welding should not exceed 300 °C.
7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
10. For questions on technology, prices and delivery, please contact our sales offices or e-mail:
sales@NextGenComponent.com.

DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

7/17/2023

11