
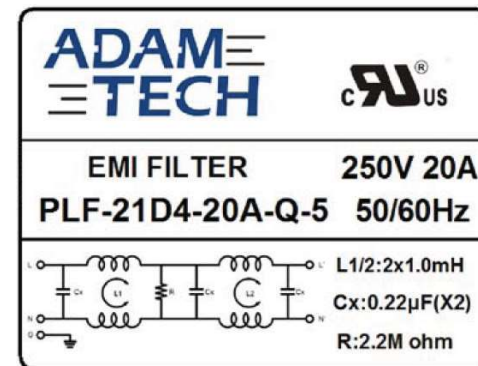




APPROVED: _____

DATE: _____ TITLE: _____

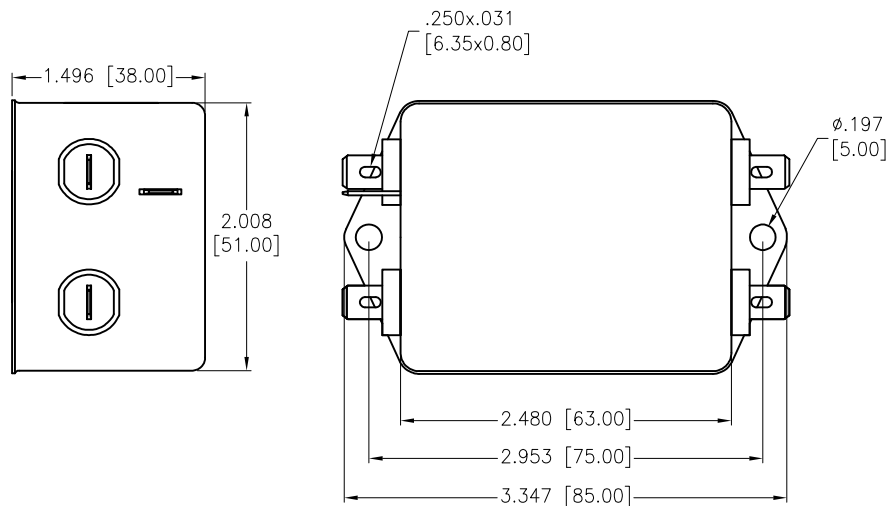

INSERTION LOSS(IN 50 ohm system according IEC/CISPR No.17):

— — — (common mode)
— — — (differential mode)

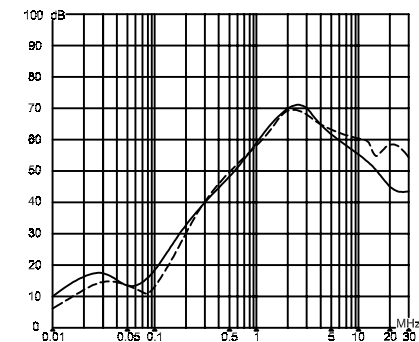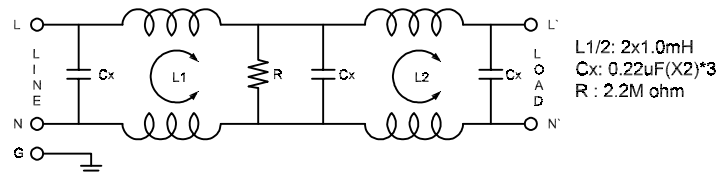

SPECIFICATIONS:

Electrical:

Voltage rating: 115/250 VAC

Current rating: 115/250 VAC: 20A RMS max

Operating frequency: 50/60Hz

Leakage Current: Each Line To Ground

@115VAC/60HZ 2.0uA max

@250VAC/50HZ 5.0uA max

Hipot Rating(For 1 Minute)

A. Line to Ground: 2,250 VDC

B. Line to Line: 500 VDC

IR: 50 Mohm @500 VDC Any Input or Output to Ground

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Medical Grade



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X $\pm .10$	ϕ .X $\pm .10$
.XX $\pm .020$	ϕ .XX $\pm .015$
.XXX $\pm .015$	ϕ .XXX $\pm .010$

DRAWN	JJ	11/7/22
CHECKED	RC	11/7/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EMI/RFI POWER LINE FILTER, MEDICAL GRADE
115/250VAC 20A, MEDIUM OUTLINE, CHASSIS MOUNT

SIZE X	PART NO. PLF-21D4-20A-Q-5	REV. C
REF: S00205C	SCALE: NTS	SHEET 1 OF 1